

# Monsanto

operated in Victoria

Monsanto Australia Limited  
East Tower, Princes Gate  
151 Flinders Street, Melbourne  
Postal Box 4077, Mail Exchange  
Melbourne, Victoria 3001

Phone 054-4333 Telex 30-288  
Telegrams 'Monsanto' Melbourne

30th March, 1972.

The Manager,  
Wilson Electric Transformer Co. Pty. Ltd.,  
310 Springvale Road,  
GLEN WAVERLEY 3150, Vic.

Dear Sir,

As you have probably heard, Monsanto is engaged in a voluntary program to limit sales of products containing polychlorinated biphenyls to uses as a dielectric in manufacture of transformers and capacitors from which escape of PCB's to the environment can be prevented by our customers.

This action has been taken because of Monsanto's concern about certain studies which indicate PCB's may be accumulating in the environment, and in some instances, have been found in food or in the food chain. As a purchaser of PCB-containing products, we feel certain you are aware of the interest and concern being demonstrated around the world by scientists about this problem. Nevertheless, we call to your special attention the attached article on PCB's by Carl G. Gustafson of the United States Federal Water Quality Administration appearing in "Environmental Science and Technology".

We believe if you are fully advised of the potential problems associated with the continued use of PCB-containing products (in these applications) you can, by the exercise of care and appropriate cautionary warnings to your customers, and the exercise of care on their part, assure that PCB's purchased by you do not escape into the environment.

Monsanto would like to continue to sell you its PCB-containing products for use as a dielectric fluid on its normal sales

2/

MONS 081235

30th March, 1972.

Conditions, but must make such sales subject to the undertakings requested below. You will appreciate that we must also reserve the right to change our sales policy as additional facts may become known about PCB's.

The undertakings with which we would request you to agree are as follows:

1. You agree to use Monsanto's PCB-containing products only as dielectric fluids in capacitors and transformers.
2. You acknowledge that you have been advised by us of and that you are aware of the potential harm to the environment and to food and the food chain by the escape of PCB's into the environment.
3. You agree to take all care in handling use and disposal of PCB's to ensure they do not enter the environment and to so advise your customers.
4. You acknowledge receipt of the attached handling precautions for Monsanto's PCB-containing products.
5. You agree to notify your customers of the hazards of PCB's.


If you agree to the above, would you kindly sign and return to us the enclosed duplicate of this letter where indicated. To enable us to give you satisfactory servicing on your future orders, your prompt reply would be appreciated.

Yours faithfully,  
MONSANTO AUSTRALIA LIMITED.

  
R.F. Garnsworthy,  
Product Manager, Chemicals.

Enos.

We agree to the foregoing

  
EXECUTIVE MANAGER

MONS 081236

# Physical Properties *of* *The* AROCLORS

AROCLOR # 1242

AROCLOR # 1248

AROCLOR # 1254

AROCLOR # 1262

AROCLOR # 1269

AROCLOR # 4465

AROCLOR # 2565



*Manufactured by*

**Monsanto Chemical Company**  
St. Louis, U.S.A.

New York—Boston—Chicago—San Francisco  
Cleveland—Birmingham—Montreal—London

Attachment 3-4

MONS 081237

## *The Aroclors*

THE Aroclors have won a prominent place in the field of synthetics with unique properties to fill requirements not met quite perfectly by materials heretofore available. They have found wide usefulness in fields where their properties are of especial value.

Following is a description of the properties of seven Aroclors, each of which is representative of a series. There are other Aroclors with slightly different characteristics in each of these series.

A study of this brief description will suggest means of employing the Aroclor in perfecting still other products, development of which has been delayed by the lack of a material that exactly fulfills particular requirements.

### *A Description of the Aroclors*

The Aroclors vary from water-white mobile oils and pale yellow viscous oils to light amber resins and opaque crystalline solids. For each of these light-colored Aroclors there is a corresponding gray or brown-black grade.

The Aroclors are produced exclusively by Monsanto Chemical Company.

#### *Non-Flammability*

The viscous Aroclor oils and the resins do not support combustion when heated alone even at their boiling points—temperatures above 350°C. Most of the Aroclors flux readily with resinous and pitch-like materials to give a product having a decreased fire hazard. When incorporated in nitrocellulose films the Aroclors retard the rate of burning.

### *Electrical Properties*

The Aroclors have extremely interesting electrical characteristics; high dielectric constant, resistivity and dielectric strength, and low power factor.

### *Solubility*

The Aroclor oils and resins are easily soluble in most of the common organic solvents and drying oils. The hard crystalline materials are in general less soluble than the Aroclor oils or resins. All Aroclors are insoluble in water. For more complete information see the attached table. Compatibility data on Aroclors in nitrocellulose lacquers will be sent on request.

### *Adhesiveness*

The Aroclor resins adhere strongly to smooth surfaces — to glass and metal or to smooth varnished or lacquered surfaces.

The softer Aroclors are suggested for difficult adhesive problems where a flexible non-drying waterproof material is necessary.

The Aroclor adhesives are thermoplastic; are readily applied hot without solvent; do not require high temperatures for easy application, and are set immediately upon cooling.

### *Thermoplasticity*

The Aroclors are permanently thermoplastic. They apparently undergo no condensation or hardening upon repeated melting and cooling. The clear Aroclor resins are now being produced with softening points up to 110°C. The opaque crystalline solids are produced with initial melting points up to approximately 180°C.

### *Non-Drying Properties*

The Aroclors are non-drying, and when they are exposed to the air, even in thin films, no noticeable oxidation or hardening takes place. However, when used as ingredients of lacquers, they do not retard the rate of drying of the lacquer films. Quick drying varnishes and paints may be made with Aroclor resins.

### *Vaporization Loss*

The Aroclors have low vaporization losses as shown in the data in the table of physical properties.

# Table of Physical Properties of the Aroclors

|                                                                                 | AROCLOR 1248                           | AROCLOR 1248                               | AROCLOR 1254             | AROCLOR 1268                         | AROCLOR 1269                                                              | AROCLOR 1466                                                      | AROCLOR 1565                                                      |
|---------------------------------------------------------------------------------|----------------------------------------|--------------------------------------------|--------------------------|--------------------------------------|---------------------------------------------------------------------------|-------------------------------------------------------------------|-------------------------------------------------------------------|
| Description (at room temperature)                                               | Practically Water-White Mobile Oil     | Practically Water-White Mobile Oil         | Pale Yellow Viscous Oil  | Light Yellow Soft Sticky Clear Resin | Cream-Colored Opaque Hard Crystalline Solid                               | Pale Amber Transparent Resin                                      | Brown Black Opaque Resin                                          |
| Color (1" depth of Aroclor)—Lowband yellow No. 510                              | 0.1 to 0.5                             | 0.1 to 0.6                                 | 0.5 to 1.0               | 0.5 to 1.5                           |                                                                           | 4.3 to 6.4                                                        |                                                                   |
| Pour Point °C. (A. S. T. M. Method)                                             | —17.7 to —30.7                         | —9                                         | 8.0 to 13.6              | 34.9 to 38.9                         |                                                                           |                                                                   |                                                                   |
| Softening Point °C. (A. S. T. M.)                                               |                                        |                                            |                          |                                      |                                                                           | 60 to 66                                                          | 68 to 73                                                          |
| Initial Hold Point in Freezing Curve (°C.)                                      |                                        |                                            |                          |                                      | 235 to 245                                                                |                                                                   |                                                                   |
| Condition at 0°C.                                                               | Viscous Liquid                         | Viscous Liquid                             | Soft Sticky Resin        | Hard Brittle Resin                   | Same as at Room Temperature                                               | Same as at Room Temperature                                       | Same as at Room Temperature                                       |
| Distilling Range (°C.; A. S. T. M. Method)                                      | 311 to 356                             | 330 to 360                                 | 358 to 381               | 373 to 404                           | Too High for A. S. T. M. Method; Can Be Distilled at Atmospheric Pressure | Too High for A. S. T. M. Method; Requires Vacuum for Distillation | Too High for A. S. T. M. Method; Requires Vacuum for Distillation |
| Specific Gravity At 25°C./70°F.                                                 | 1.374 to 1.393                         | 1.446 to 1.466                             | 1.548 to 1.550           | 1.646 to 1.663                       | 1.876 to 1.876                                                            | 1.713 to 1.733                                                    | 1.783 to 1.740                                                    |
| Per Cent Increase in Volume Upon Heating from 25°C. to temperature specified    | 8.71<br>25° to 48°C.                   | 26° to 65°C.—3.83%<br>25° to 250°C.—18.54% | 8.64<br>35° to 64°C.     | 4.16<br>26° to 90°C.                 |                                                                           | 2.46<br>25° to 65°C.                                              | 2.83<br>26° to 65°C.                                              |
| Approximate Average coefficient of Expansion over range specified (cc./cc./°C.) | 0.000678<br>25° to 68°C.               | 0.000708<br>25° to 68°C.                   | 0.000661<br>26° to 64°C. | 0.000640<br>26° to 90°C.             |                                                                           | 0.000811<br>25° to 65°C.                                          | 0.000656<br>25° to 65°C.                                          |
| Pounds per Gallon at 25°C. (Average)                                            | 11.60                                  | 13.06                                      | 13.86                    | 13.71                                | 15.60                                                                     | 14.28                                                             | 14.41                                                             |
| Decimal Part of Gallon Bulked by One Pound                                      | 0.0863                                 | 0.0839                                     | 0.0778                   | 0.0739                               | .0641                                                                     | 0.0700                                                            | 0.0893                                                            |
| Viscosity (Seconds Saybolt) at 210°F.                                           | 34.0 to 34.6                           | 36.0 to 37.0                               | 46.0 to 47.7             | 90.0 to 103.0                        | Solid                                                                     | Too Viscous to Determine with Saybolt Apparatus                   | Too Viscous to Determine with Saybolt Apparatus                   |
| Viscosity (Seconds Saybolt) at 100°F.                                           | 81.1 to 93.1                           | 200.0 to 210.0                             | 1800 to 2400             |                                      | Solid                                                                     |                                                                   |                                                                   |
| Flash Point °C. (Cleveland Open Cup)                                            | 176 to 180                             | 196                                        | None                     | None                                 | None                                                                      | None                                                              | None                                                              |
| Fire Point °C. (Cleveland Open Cup)                                             | 234 to None at Boiling Point of Liquid | None                                       | None                     | None                                 | None                                                                      | None                                                              | None                                                              |
| Refractive Index for D-Line at 20°C.                                            | 1.487 to 1.489                         | 1.630 to 1.631                             | 1.6407 to 1.6410         | 1.6501 to 1.6517                     |                                                                           | 1.664 to 1.667                                                    |                                                                   |
| Maximum Acidity (Milligrams KOH per Gram)                                       | 0.01                                   | 0.01                                       | 0.01                     | 0.03                                 |                                                                           | 0.08                                                              | 1.26                                                              |
| Per Cent Loss on Heating (A. S. T. M.)                                          | 3.04 to 3.66                           | 3.0 to 4.0                                 | 1.06 to 1.38             | 0.48 to 0.56                         | 0.10 to 0.20                                                              | 0.13 to 0.29                                                      | 0.21 to 0.24                                                      |

### *Toxicity*

Experimental work in animals shows that prolonged exposure to Aroclor vapors evolved at high temperatures or by repeated oral ingestion will lead to systemic toxic effects.

Repeated bodily contact with the liquid Aroclors may lead to an acne-form skin eruption.

Suitable draft ventilation to control the vapors evolved at elevated temperatures, as well as protection by suitable garments from extensive bodily contact with the liquid Aroclors, should prevent any untoward effect.

### *Odor and Taste*

The solid Aroclor resins are almost without odor and taste at ordinary temperatures.

### *Stability*

The Aroclors are remarkably resistant to the action of either hydrolyzing agents or high temperature. They are not affected by boiling with sodium hydroxide solution. Because of their stability to heat, the Aroclors are useful heat-transfer media. Aroclor 1254 and particularly the less viscous Aroclor 1248 are recommended for this purpose because they may be heated at temperature up to 325°C. (617°F.) in a closed system for long periods without appreciable decomposition and are at the same time non-flammable.

### *Action on Metals*

The Aroclors are non-corrosive. Mild steel exposed to the action of Aroclor 1254 or Aroclor 1248 in a closed system at 325°C. (617°F.) for 848 hours showed no pitting and the corrosion rate, as measured in inches of penetration per year, was 0.0021.

### *Water and Moisture Proofness*

The Aroclors are water proof. When impregnated into porous rigid bodies they are effective water and moisture proofers. Special Aroclor compounds are available for moisture-proofing such articles as paper and radio resistors and for water-proofing articles such as abrasive wheels.

### STANDARD CONTAINERS

|              |                          | 50 gal. Drums |
|--------------|--------------------------|---------------|
| Aroclor..... | 1242                     | 500 lbs. net  |
| Aroclor..... | 1248                     | 500 lbs. net  |
| Aroclor..... | 1254                     | 500 lbs. net  |
| Aroclor..... | 1262                     | 500 lbs. net  |
| Aroclor..... | 4465                     | 500 lbs. net  |
| Aroclor..... | 2565—drums, 395 lbs. to  |               |
|              | 426 lbs. net.            |               |
| Aroclor..... | 1269—bags, 200 lbs. net. |               |
|              | barrels, 400 lbs. net.   |               |

# Solubility of the Aroclors In Various Solvents

(Figures Represent Grams of Aroclor per 100 cc. Solvent)

| TYPE OF SOLVENT           | AROCLOR 1248 |           | AROCLOR 1254 |            |
|---------------------------|--------------|-----------|--------------|------------|
|                           | COLD         | HOT       | COLD         | HOT        |
| <i>Chloro Derivatives</i> |              |           |              |            |
| Chloroform.....           | S*           | S*        | S*           | S*         |
| Carbon Tetrachloride..... | S            | S         | S            | S          |
| Ethylene Dichloride.....  | S            | S         | S            | S          |
| Trichloro Ethane.....     | S            | S         | S            | S          |
| Trichloro Ethylene.....   | S            | S         | S            | S          |
| Tetra Chloro Ethane.....  | S            | S         | S            | S          |
| Mixed Amyl Chlorides..... | S            | S         | S            | S          |
| Mono Chlorobenzene.....   | S            | S         | S            | S          |
| <i>Ketones</i>            |              |           |              |            |
| Acetone.....              | S            | S         | S            | S          |
| <i>Aldehydes</i>          |              |           |              |            |
| Formaldehyde (40%).....   | I*           | I*        | I*           | I*         |
| Furfural.....             | S            | S         | S            | S          |
| <i>Amines</i>             |              |           |              |            |
| Aniline.....              | S            | S         | S            | S          |
| Pyridine.....             | 132.5@30°C.  | 440@99°C. | 114@31°C.    | 425@100°C. |
| <i>Drying Oils</i>        |              |           |              |            |
| Tung Oil.....             | S            | S         | S            | S          |
| Linseed Oil.....          | S            | S         | S            | S          |
| <i>Acids</i>              |              |           |              |            |
| Acetic Acid.....          | S            | S         | S            | S          |
| Oleic Acid.....           | S            | S         | S            | S          |
| <i>Miscellaneous</i>      |              |           |              |            |
| Nitro Benzene.....        | S            | S         | S            | S          |
| Carbon Disulfide.....     | S            | S         | S            | S          |
| Water.....                | I            | I         | I            | I          |

\*NOTE: S signifies very soluble or miscible in all proportions.  
I signifies insoluble.  
P.S. signifies partially soluble.

# Solubility of the Aroclors In Various Solvents

(Figures Represent Grams of Aroclor per 100 cc. Solvent)


| TYPE OF SOLVENT                 | AROCLOR 1243 |            | AROCLOR 1254 |                |
|---------------------------------|--------------|------------|--------------|----------------|
|                                 | COLD         | HOT        | COLD         | HOT            |
| <i>Hydrocarbons</i>             |              |            |              |                |
| Mineral Spirits.....            | S*           | S*         | S*           | S*             |
| Gasoline.....                   | S            | S          | S            | S              |
| Kerosene.....                   | S            | S          | S            | S              |
| Paraffin.....                   | —            | S@60°C.    | —            | S@30°C.        |
| Benzene.....                    | S            | S          | S            | S              |
| Toluene.....                    | S            | S          | S            | S              |
| Xylene.....                     | S            | S          | S            | S              |
| Turpentine.....                 | S            | S          | S            | S              |
| Pine Oil.....                   | S            | S          | S            | S              |
| <i>Hydroxy Derivatives</i>      |              |            |              |                |
| Methyl Alcohol.....             | 43.5@29°C.   | 88.5@80°C. | 15@26°C.     | 22.2@65°C.     |
| Ethyl Alcohol (Formula 3A)..... | 23.3@29°C.   | 80.0@70°C. | 10@27°C.     | 28 @75°C.      |
| Normal Butyl Alcohol.....       | S            | S          | S            | S              |
| Amyl Alcohol.....               | S            | S          | S            | S              |
| Glycerine.....                  | I*           | I          | I            | I              |
| 90% Phenol.....                 | 194@30°C.    | S@99°C.    | P.S.*        | Slowly Soluble |
| <i>Ethers</i>                   |              |            |              |                |
| Ethyl Ether.....                | S            | S          | S            | S              |
| Cellosolve Acetate.....         | S            | S          | S            | S              |
| <i>Ether Alcohols</i>           |              |            |              |                |
| Cellosolve.....                 | S            | S          | S            | S              |
| Carbitol.....                   | 234@31°C.    | 307@89°C.  | 173@26°C.    | 259@ 98°C.     |
| p-p' Dihydroxy Ethyl Ether..... | 16.9@43°C.   | 19@99°C.   | 8@30°C.      | 10@100°C.      |
| <i>Esters</i>                   |              |            |              |                |
| Castor Oil.....                 | S            | S          | S            | S              |
| Methyl Acetate.....             | S            | S          | S            | S              |
| Ethyl Acetate.....              | S            | S          | S            | S              |
| Butyl Acetate.....              | S            | S          | S            | S              |
| Amyl Acetate.....               | S            | S          | S            | S              |
| Ethyl Lactate.....              | S            | S          | S            | S              |
| Diethyl Phthalate.....          | S            | S          | S            | S              |
| Dibutyl Phthalate.....          | S            | S          | S            | S              |
| Tricresyl Phosphate.....        | S            | S          | S            | S              |
| Cotton Seed Oil.....            | S            | S          | S            | S              |
| Ethylene Glycol Diacetate.....  | S            | S          | S            | S              |

# TRANSFORMER

# Askarel

## Inspection & Maintenance Guide

# Monsanto

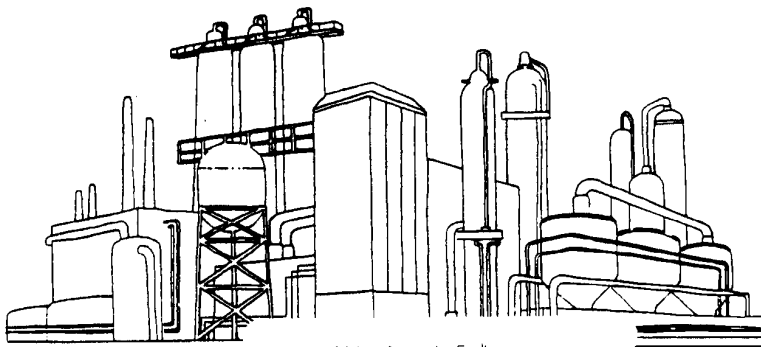

Attachment 5-4

MONS 081244

5-4

# Table of Contents

## SECTION A

|                                                                                                                       |    |
|-----------------------------------------------------------------------------------------------------------------------|----|
| TRANSFORMER ASKARELS                                                                                                  | 1  |
| I. Introduction                                                                                                       | 1  |
| II. History of Trade Name Types                                                                                       | 1  |
| Table I - The Composition of Transformer Askarels                                                                     | 2  |
| III. Interchangeability                                                                                               | 2  |
| IV. Table II - Official Transformer Askarel Shipping Specifications                                                   | 3  |
| V. Ordering Instructions                                                                                              | 2  |
| VI. Stability                                                                                                         | 2  |
| VII. Precautions When Handling Drums, Tank Cars and When Opening Transformers                                         | 2  |
| A. Keep Dry During Handling                                                                                           | 2  |
| Table III - Handling and Pumping Temperatures                                                                         | 4  |
| B. Use Ordinary Personal Precautions                                                                                  | 4  |
| C. Precautions on Opening an Askarel Transformer                                                                      | 5  |
| VIII. Avoid Environmental Pollution                                                                                   | 5  |
| 1. Labeling Askarel Transformers                                                                                      | 6  |
| 2. Disposal of Liquid and Solid Wastes                                                                                | 6  |
| 3. Conditioning of New or Recycled Askarel                                                                            | 6  |
| 4. Teardown of Transformers for Repair or Scrap                                                                       | 7  |
| 5. Transformer Disposal                                                                                               | 7  |
| IX. Expected Service Life                                                                                             | 7  |
| X. General Characteristics of Transformer Askarel Fluid                                                               | 7  |
| XI. Sampling Transformer Askarel Fluid                                                                                | 8  |
| XII. Evaluation of Askarel Received in New Equipment                                                                  | 8  |
| XIII. Dielectric Breakdown Voltage - Moisture Relationship                                                            | 9  |
| Table IV - Relation of Dielectric Breakdown Voltage to Amount of Dissolved Water in Askarel and Mineral Oil           | 9  |
| Table V - Approximate Solubility of Water in Transformer Askarel and Mineral Oil                                      | 10 |
| XIV. Turbidity                                                                                                        | 10 |
| XV. Check Points for Maintaining Askarel Insulation                                                                   | 10 |
| A. General Considerations                                                                                             | 10 |
| B. Modern Sealing Procedures                                                                                          | 11 |
| C. The Older Sealing Arrangements                                                                                     | 12 |
| XVI. Periodic Fluid Inspection and What Checkpoints Mean                                                              | 12 |
| A. Visual Inspection                                                                                                  | 13 |
| B. Dielectric Breakdown Voltage                                                                                       | 13 |
| XVII. Inspection Checklist                                                                                            | 13 |
| XVIII. Contamination in Transformers                                                                                  | 14 |
| Table VI - Effect of Common Insulation Materials on Power Factor and Dielectric Strength                              | 14 |
| Table VII - Effect of Common Insulation Materials on Volume Resistivity of Askarel                                    | 14 |
| XIX. ASTM Method for Investigating the Compatibility of Transformer Insulation and Construction Materials in Askarels | 15 |
| XX. Refining Askarel for Re-Use                                                                                       | 15 |
| A. Filtering Through Dry Blotter Paper to Remove Moisture and Extraneous Particles                                    | 15 |

|                                                                                   |    |
|-----------------------------------------------------------------------------------|----|
| Table VIII - Water Removal by Filtering Askarel Through a Paper Press             | 16 |
| B. Disposal of Solid Wastes                                                       | 16 |
| C. Solid Insulation Requiring Drying                                              | 16 |
| D. Earth Treatment for Maximum Improvement of Power Factor and Volume Resistivity | 16 |
| Table IX - Effect of Power Factor and Volume Resistivity                          | 17 |
| XXI. Cleaning Arced Transformers                                                  | 17 |
| XXII. Sampling Askarel                                                            | 17 |

## SECTION B

|                                                             |    |
|-------------------------------------------------------------|----|
| ASKAREL FILLED SWITCHES AND TERMINAL CHAMBERS               | 19 |
| I. Introduction                                             | 19 |
| II. Sources of Contamination                                | 19 |
| III. Sealing Switches and Terminal Chambers                 | 20 |
| IV. Askarel Used Under Mild Arcing Conditions               | 20 |
| V. Maintenance for Askarel Filled Switches                  | 20 |
| VI. Askarel Under Excessive Temperature or Fault Conditions | 21 |

## SECTION C

|                            |    |
|----------------------------|----|
| TOXICITY AND SAFE HANDLING | 21 |
| I. Inhalation              | 21 |
| II. Skin Contact           | 21 |

## SECTION D

|                                                                    |    |
|--------------------------------------------------------------------|----|
| ANALYTICAL SERVICES ON TRANSFORMER ASKAREL AVAILABLE FROM MONSANTO | 22 |
| Types of Analyses Available:                                       | 22 |
| 1) Routine Maintenance Check                                       | 22 |
| 2) Complete Analysis                                               | 22 |
| 3) Analysis After Earth Refinement                                 | 22 |

## SECTION E

|                                                                                                                           |    |
|---------------------------------------------------------------------------------------------------------------------------|----|
| APPENDICES                                                                                                                | 23 |
| Appendix A - Askarel Stability and Composition of Arc Formed Gas                                                          | 23 |
| Appendix B - Solubility of Gas in Transformer Askarels                                                                    | 23 |
| Appendix C - Effect of Temperature on Dielectric Breakdown Voltage of Askarel                                             | 23 |
| Appendix D - Comparison of the Approximate Viscosity in Saybolt Universal Seconds of Transformer Askarels and Mineral Oil | 24 |
| Appendix E - The Density of Inertion 54201 KA 7338-9 and Transformer Pyranol A1383B-3                                     | 24 |
| Appendix F - Thermal Conductivity Values of Transformer Pyranol A1383B-3                                                  | 24 |
| Appendix G - Heat Capacity                                                                                                | 24 |
| Appendix H - Coefficient of Expansion                                                                                     | 24 |
| Appendix I - Fire Resistance                                                                                              | 24 |
| Appendix J - Seals, Properties and Procurement                                                                            | 25 |
| Appendix K - Caution Label                                                                                                | 25 |

NOTICE: "Nothing contained herein is to be construed as a recommendation to use any product in conflict with any patent. MONSANTO MAKES NO WARRANTIES AS TO THE FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY OF ANY PRODUCT REFERRED TO, no guarantee of satisfactory results from reliance upon contained information or recommendations, and disclaims all liability for any resulting loss or damage."

# Section A

## Transformer

### Askarel

#### I. Introduction

The term "askarel" as defined by IEEE, ASTM and the National Electrical Code generally describes a broad class of fire-resistant<sup>1</sup> synthetic chlorinated hydrocarbon insulating liquids widely used in transformers, reactors and accessory equipment operated at power frequencies. Askarels of various compositional types are in use. (For the general properties and types see ASTM D-2283.) Under arcing conditions the gases produced, while consisting of predominantly non-combustible hydrogen chloride, can contain varying amounts of combustible gases depending upon the askarel type.

This manual describes the operating characteristics of transformer askarel liquid insulation as manufactured by Monsanto and how it differs from mineral oil. Appropriate handling and disposal procedures for both scrap askarel liquid and impregnated solid materials are given in accordance with the guidelines recommended by the American National Standards Institute.

The information is based on facts gathered by Monsanto over 40 years as a producer of askarel, plus knowledge gained from the experience of transformer manufacturers and users. This guide outlines the maintenance required for askarel fluid in "modern" transformers and offers suggestions for sealing and maintaining askarel in old units. By following this guide, we believe users will obtain maximum service from askarel insulation with a reasonable minimum of maintenance. If questions arise relating to the designing and building of transformers, these should be referred to regular transformer suppliers.

Monsanto gratefully acknowledges the assistance, guidance and the contributions of certain data by the following:

Edward L. Raab — General Electric  
Dr. T. K. Sloat — Westinghouse Electric

#### II. History of Trade Name Types

"Askarel" is the generic name for the fire-resistant liquid insulation and coolant first used by General Electric Company in 1932 for their Pyranol<sup>2</sup> brand name fire-resistant transformers. Westinghouse Electric Corporation uses their brand name, Inerteen.<sup>2</sup>

Whatever the trademarked brand, the askarel contains chlorinated biphenyl — one of the best liquid insulations developed by science. This inert material is chemically stable, fire-resistant, heat stable, non-corrosive, and has high dielectric strength under the operating conditions encountered in transformers.

In addition to manufacturing Aroclor<sup>®</sup> chlorinated biphenyl, Monsanto also mixes this dielectric fluid with chlorobenzenes to produce the presently used Inerteen and Pyranol blends described in Table I.

<sup>1</sup>NOTE: Materials designated "fire resistant" generally are more difficult to ignite, or once ignited, burn at a slower rate than corresponding conventional materials. This term does not mean that fire resistant materials will not burn. However, when properly used, Monsanto's fire resistant ASKAREL FLUIDS are useful in helping customers meet their fire safety requirements.

<sup>2</sup>Trademark of General Electric Company

<sup>2</sup>Trademark of Westinghouse Electric Corporation

®Registered trademark of Monsanto Company

nerating askarel transformers — take every precaution to guard the askarel insulation from exposure to high humidity and moisture contamination. Keep 5 or 55 gallon drums of askarel dry, lay stored drums on their sides with the bung at the highest point from floor to keep water off the drum head (which can be sucked into the askarel by the drum "breathing"). This precaution is not necessary when drums are stored indoors, which is the preferred place for storage.

To avoid leakage the drums used for askarel are of heavy construction. Sixteen gauge metal is used, with special rim seal and bung construction. The drums should be drained as completely as possible and then flushed twice with kerosene type solvent to remove all of the askarel. Accumulated liquids and washings should be collected and should be incinerated at high temperatures, e.g., about 2000°F, to destroy the polychlorinated biphenyls (PCBs). See Section A, VIII.

Tank cars used to transport askarels are in exclusive service and not used interchangeably for other products. All cars must be unloaded through the top (dome fitting) either by pumping or with controlled pressure using dry air or dry nitrogen. If nitrogen has been used for unloading it is necessary to advise the shipper so that when the car returns the nitrogen can be replaced with dry air before any one may enter the car. If the car is to be unloaded by pumping it will be necessary to use a dryer on the air intake line to remove moisture.

All tank cars are fitted with steam coils, which are available for unloading under extreme low temperature conditions.

Convenient handling and pumping temperatures are given in Table III.

**B. Use Ordinary Personal Precautions:**

Transformer askarel has been made, handled, and used for over 40 years. It can be handled safely with recommended precautions. If accidentally spilled on hands, no serious skin irritation will occur. However, liquid askarel has a solvent action (similar to paint


**Table III**  
**Handling and Pumping Temperatures**


| Product          | Unloading,<br>Handling and<br>Pumping |
|------------------|---------------------------------------|
|                  | Temperature °C                        |
| Pyranol A13838-3 | 20 - 55                               |
| Inerteen 70-30   | 20 - 55                               |
| Inerteen 100-42  | 35 - 75                               |

thinner) on the fats and oils of the skin and prolonged contact may lead to drying and chapping of the skin.

In case of contact, wash the skin with soap and water; remove and destroy saturated clothing. Clean up spills with rags, sawdust and absorbent clay. Segregate these items for proper disposal. (See page 6, "Disposal of Liquid and Solid Wastes".) Eye contact may result in painful irritation but no permanent damage to tissues. If askarel gets in the eyes, flush with large amounts of water. As with all eye first aid, refer to a physician. To relieve irritation, physicians have used an ophthalmic anesthetic solution as well as ophthalmic cortisone acetate solution.

Infrequent exposure to askarel vapors will not cause ill effects. However, prolonged exposure to high vapor concentrations should be avoided. If hot askarel must be handled in a closed or confined area, provide the area with mechanical exhaust ventilation — or

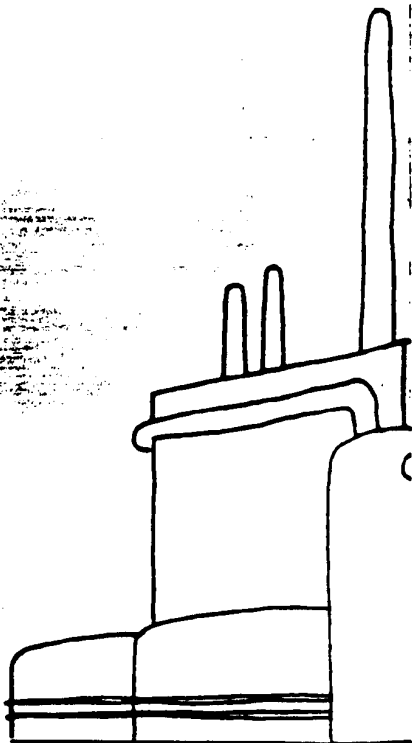

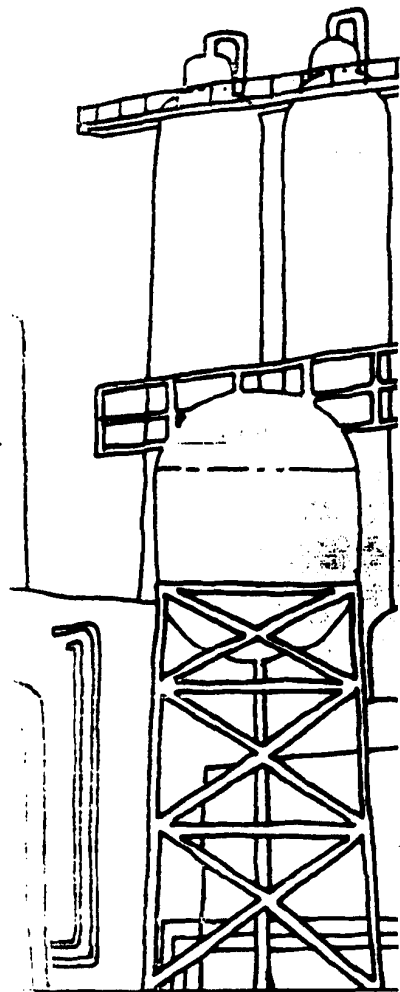

wear an organic cartridge respirator approved by the U.S. Bureau of Mines.

C. Precautions On Opening an Askarel Transformer:

Askarels of various compositional types are used. Under arcing conditions the gases produced, while consisting of predominantly non-combustible hydrogen chloride, can yield varying amounts of combustible gases depending upon the askarel type.

Insulation systems incorporating these askarels and cellulosic or other organic materials may, when arced, produce gaseous mixtures which are moderately flammable. As a precaution, such gases should be removed from the askarel by bubbling dry nitrogen through the askarel and flushing the gas space with dry nitrogen before any work is performed on the apparatus.

The American Institute of Electrical and Electronic Engineers Guide IEEE Std. 78-1974 gives more detailed instructions and guidance "For Acceptance and Maintenance of Transformer Askarel in Equipment". This guide is published by the Institute of Electrical & Electronics Engineers, Inc., 345 East 47th Street, New York, New York 10017. We recommend that users of askarel transformers refer to this IEEE document.

VIII. Avoid Environmental Pollution

Transformer askarels contain polychlorinated biphenyls (PCBs) which have been used in the United States and elsewhere over the past 40 years for many industrial and consumer applications. During the past several years evidence has accumulated to indicate that PCBs are widely dispersed throughout the environment and that they can have adverse ecological and toxicological effects.

The United States Government's Interdepartmental Task Force on PCBs, Com-72-10418, in their March 20, 1972 report titled, "Polychlorinated Biphenyls and the Environment", recommended restricting PCBs to use in capacitors and transformers.

This report is distributed by the National Technical Information Service, U.S. Department of Commerce, Springfield, Virginia 22151.

A document titled, "Guidelines for Handling and Disposal of Capacitor and Transformer Grade Askarels, Containing Polychlorinated Biphenyls", has been prepared and is available from the American National Standards Institute, Committee C107, 1430 Broadway, New York, New York 10018. Document number is ANSI C107.1-1974. (This guideline is being revised during 1976. The new edition should be available 1976/77).

The scope, objectives and the composition of this committee are:

ANSI Committee C107

Scope:

Procedures and guides for safe use, maintenance and disposal of askarel and askarel-soaked materials used in electrical equipment.

Objectives:

1. Source of technical information and advice for Federal, State, local authorities and all others concerned.
2. Encourage development of suitable disposal facilities and keep all concerned informed.
3. Serve as the advisory group for United States participation in international organizations: CEE, IEC, CIGRE.

Composition:

Organizations active in or represented by this ANSI committee include: National Electrical Manufacturers Association, Electronic Industries Association, Institute of Electrical and Electronic Engineers, American Society for Testing and Materials, Electric Light and Power Association, Certified Ballast Manufacturers Association, Environmental Protection Agency, Office of Environmental Affairs, General Services Administration, National

Bureau of Standards; Department of the Army; Rural Electrification Administration; Division of Environmental Research; TVA; American Public Power Association; Water Pollution Control Federation; Food and Drug Administration; National Fire Protection Association; Underwriters Laboratories; and several sections of the U.S. Department of Interior.

The following are pertinent excerpts taken from the ANSI Guidelines for Askerel Transformers:

1. LABELING ASKAREL TRANSFORMERS (Pg. 16)

4.2.2.1 New Transformers. All new transformers that contain PCBs shall have a label of adequate durability, permanently and prominently attached to the tank by the manufacturer, given adequate warning and instructions. A suggested label includes the following:

CAUTION: The insulating liquid in this transformer contains polychlorinated biphenyls (PCBs). Care should be taken to prevent entry into the environment. In case of malfunction or leaks, consult the instruction manual or the manufacturer.

4.2.2.2 In-Service Transformers. The transformer manufacturer should make available suitable labels with a similar warning as shown in 4.2.2.1 for use on existing transformers.

2. DISPOSAL OF LIQUID AND SOLID WASTES (Pg. 15)

4.1.6.5.1 General. Disposal of askarel and askarel-soaked materials should be accomplished by means in which there is no significant release of askarel to the environment. At present, disposal is accomplished by carefully controlled incineration of liquids and soaked software, and by controlled landfill burial of apparatus and other hardware from which askarel has been previously drained and washed.

Present knowledge indicates that proper incineration must involve a suitable balance between dwell time and temperature in the incineration plus oxygen availability and, finally, suitable scrubbers to remove the HCl that will be formed; for example, 2-second dwell time at 2000°F and 3% excess oxygen in stack gas, or 1.5-second dwell time at 2700°F and 2% oxygen in stack gas.

These facilities should meet the applicable requirements of the state in which they are located and should control effluents within the limits set forth in this standard.


Controlled landfill or deep-well disposal can be used where permitted by federal, state, and local regulations.


The ANSI Guide lists the locations of facilities that conform with the above requirements. Monsanto has such an incinerator at the W. G. Krummrich Plant, Department 831, Sauget, Illinois 62201, where arrangements can be made for scrap askarel liquid disposal for a modest fee. For disposal of solid scrap a controlled dry land-fill can be used where permitted by Federal, State and local regulations.

3. CONDITIONING OF NEW OR RECYCLED ASKAREL (Pg. 16)

4.2.1.3.1. Askarel Conditioning Equipment. The conditioning unit should be located either in the storage tank area or in the main transformer manufacturing area for filling with askarel.

4.2.1.3.2 Fuller's Earth. Conditioning of new askarel or recycled askarel requires fuller's earth treatment. The spent fuller's earth in cartridges or bags, when replaced, should be allowed to drain thoroughly over drip pans to remove as much liquid askarel as possible. The cartridge units of steel mesh construction should be placed in the "STEEL CONTAMINATED WITH ASKAREL" container for disposition. Cloth bags filled with fuller's earth should be placed in the "SCRAP BURNABLE ASKAREL WASTE" container for disposition.

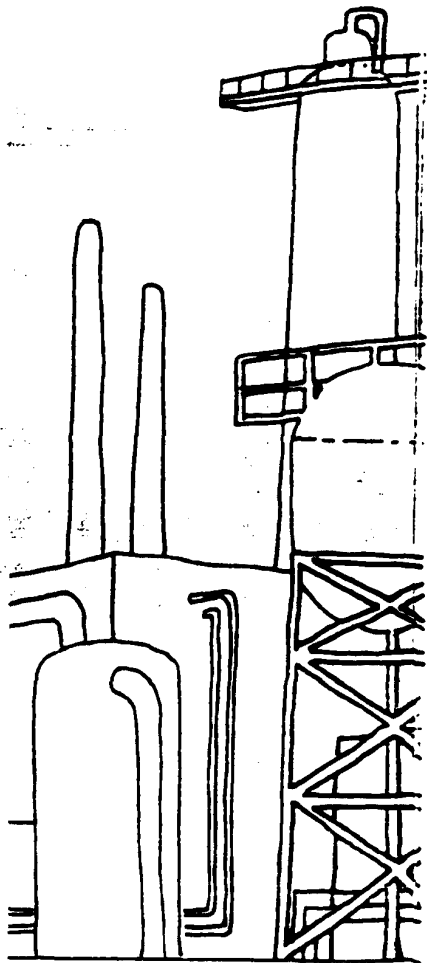

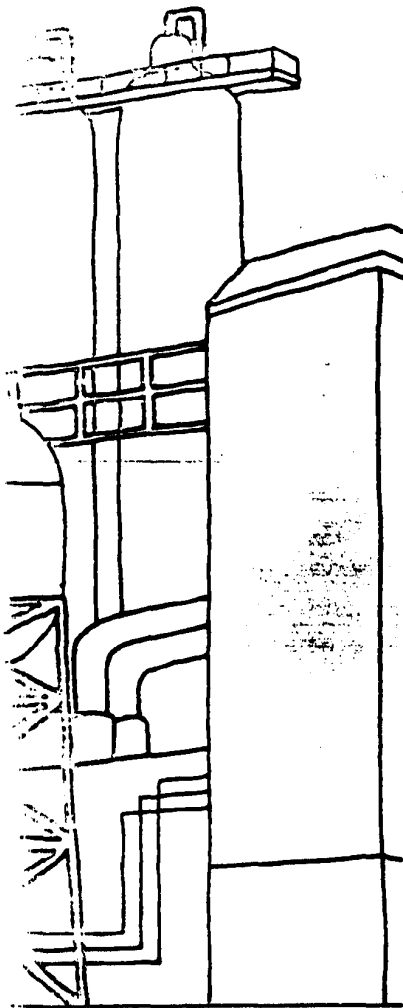

#### 4. TEARDOWN OF TRANSFORMERS FOR REPAIR OR SCRAP (Pg. 16)

4.2.1.4.1 Drain all askarel from the unit either into a holding tank or reuse or into the drum labeled "SCRAP ASKAREL" for disposition, and then allow sufficient time for all of the askarel to drain from the core and coils.

4.2.1.4.2 Remove the core and coil assembly from the transformer. Sufficient absorbent material should be placed on the floor to absorb any askarel fluid that still drains from the transformer.

4.2.1.4.3 Place all materials in the appropriate salvage containers during the dismantling for later disposition.

4.2.1.4.4 All used materials, including rags, sawdust, tape, etc. regardless of quantity, shall be put into the appropriate containers for disposition.

#### 5. TRANSFORMER DISPOSAL (Pg. 17)

4.2.3.6 The ultimate disposal of an askarel-filled transformer may be accomplished in either of two ways:

(1) Complete drainage and dismantling with the proper disposal of the askarel and askarel-soaked components as described in 4.1.6.

(2) Disposition of askarel transformers by means of junk or scrap dealers. This should be avoided unless a transformer is first drained, followed by soaking the interior with a suitable solvent. Accumulated liquids and washings are to be disposed of as described in 4.1.6.

### IX. Expected Service Life

Manufacturers indicate that properly designed and installed askarel transformers are expected to give trouble-free service for at least 30 years. Since their introduction in 1932, the manufacturers report finding the overall failure rate to be less than 0.5% for all units under test and service conditions. The Edison Electric Institute's report (1956-1958) for their member utilities publishes the failure rate for askarel transformers as 0.13 per hundred banks per year.

Mr. Frank M. Clerk, who invented transformer askarels at the General Electric Company in the early 1930s, made the highly pertinent comment based on his many years of experience with G.E. Pyranol (askarel type) transformers that —

*"The important thing is to keep them dry — otherwise leave them alone".*

These words of wisdom became especially applicable in more recent years when welding shut rather than gasketing became the main method of sealing askarel transformers. These units are sold with the understanding that the liquid is in a normally hermetically closed system.

### X. General Characteristics of Transformer Askarel Fluid

Appreciation of the following characteristics, as given in the IEEE Guide, leads to understanding the reasons for selecting dielectric breakdown voltage and moisture as the prime practical tests to judge the quality of transformer askarel fluid. Also, due to these characteristics the power factor of transformer askarel will be normally much higher than the corresponding values for mineral oil.

In comparison to mineral insulating oil, askarel is a relatively polar material; i.e., its molecules are dipoles, free to rotate around their axes and responsive to orientation by electrical forces. Askarel also exhibits a much higher dielectric constant and capacitance than insulating oil, and these differences must be kept in mind when interpreting electrical test data.

Because it is relatively polar, and possesses high solvency power, askarel is much more electrically sensitive than mineral oil to traces of extraneous soluble polar materials, and consequently the choice of

constructional materials destined for use in askarel is very critical. This sensitivity is reflected in the power factor and resistivity (specific resistance) of the askarel.

It is important to note that, with the exception of water, the dielectric breakdown voltage of askarel is not generally adversely affected by many of the soluble polar materials to which its power factor and resistivity (specific resistance) are so sensitive. In fact, the dielectric breakdown voltage of askarel is somewhat greater than that of insulating oil. Therefore, the values assigned these dielectric fluids in newly supplied transformers are 30 KV min. and 26 KV min., respectively.

As with insulating oil, askarel must be kept dry. It can pick up moisture from exposure to humid atmosphere. Under similar conditions of exposure, askarel can pick up nearly twice as much moisture when measured on a parts per million weight basis.

#### XI. Sampling Transformer Askarel Fluid

The following precautions about sampling are quoted from the IEEE Guide.

"Representative samples, whether of the complete contents or only parts thereof, are extremely important from the standpoint of evaluation of the quality of the product sampled. Obviously careless sampling procedure or contamination in the sampling equipment will result in a sample that is not truly representative. This generally leads to erroneous conclusions concerning quality and incurs loss of time, effort, and expense involved in securing, transporting, and testing the sample. It is strongly recommended that all of the procedures and precautions outlined in the latest revision of ASTM D 923 (Sampling Electrical Insulating Liquids) be followed.

"Because of the high specific gravity (relative density) of askarel (greater than 1), water and some other impurities are most likely to be found at or near the surface. The top sample, therefore, is considered to represent the worst condition."

#### XII. Evaluation of Askarel Received in New Equipment


Some users of askarel equipment find it desirable to make "as received tests" on all equipment. It is quite common to use the dielectric breakdown voltage test and visual appearance as the most significant tests. If suitable equipment and trained personnel are available additional information may be obtained from the power factor, color, and moisture content tests.

In sampling askarel contained in apparatus extreme care must be exercised in order to obtain a representative sample. ASTM Method D 923 should be followed.

New equipment with askarel exhibiting the following characteristics is considered acceptable:

|                      |                        | ASTM Methods |
|----------------------|------------------------|--------------|
| Dielectric Breakdown |                        |              |
| Voltage              | 30 KV min.             | D 877        |
| Color                | 300 max. (Straw color) | D 2129       |
| Condition - Visual   | Clear                  | D 1702       |
| Water Content        | 35 ppm max.            | D 1533       |
| Power Factor at 25°C |                        | D 924, D 150 |

"The power factor of askarel taken from new transformers, reactors and accessory equipment can reflect the presence of moisture, dissolved polar compounds, or other contaminants and may vary with the type of equipment from which the sample was taken due to the different ratios of liquid-to-solid insulation and to the high solvency power of the askarel. Given an acceptable water content and dielectric breakdown voltage of the askarel as indicated above, a high power factor seldom impairs the serviceability of the askarel within rather broad limits and is

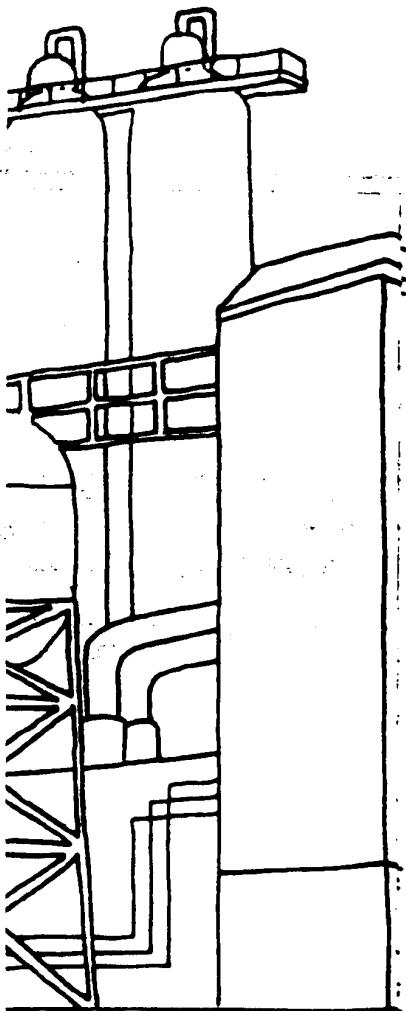

indicative of the degree of extraneous soluble polar materials present.

Recognizing the possibility of a wide range of power factors being recorded for askarel in new equipment, it is difficult to establish a single limit which would be acceptable to both suppliers and users for all applications. However, as a broad guide, power factors up to about 10% at 25°C and 60 cycles per second (hertz) do not in general indicate any abnormal contamination providing that the other criteria (water content, dielectric breakdown voltage, etc.) are met. Much higher power factors may indicate excessive contamination or the misapplication of the solid materials used in manufacture in contact with the askarel and should be investigated.

### XIII. Dielectric Breakdown Voltage - Moisture Relationship

The dielectric breakdown voltage of askarel is highly sensitive to excess moisture; not sensitive to ordinary dissolved polar materials. While the dielectric breakdown voltage can also be lowered by severe arcing, askarel turns noticeably black or has particles of sooty carbon floating in it if arcing has occurred. Then the transformer should be repaired and the askarel replaced.

If the dielectric breakdown voltage is checked periodically and decreases significantly - this indicates moisture pick-up, arcing, or both. When the dielectric breakdown voltage has dropped to 25 KV or less, an analysis for water is necessary. If water is found in excess of 40 ppm at room temperature, its source should be located and corrections made.

When the moisture content approaches 125 ppm (saturation level at room temperature), the dielectric breakdown voltage of askarel drops below the value required for efficient insulating. The moisture content should not be allowed to rise over 70 ppm, sampled at operating temperature. If the moisture content is found to be in a satisfactory range and the dielectric breakdown voltage is low, the transformer manufacturer should be consulted.

Table IV shows the relationship of dielectric breakdown voltage vs. moisture and Table V indicates the approximate water solubility limits in askarel and mineral oil.

Table IV  
Relation of Dielectric Breakdown Voltage to Amount of Dissolved  
Water in Askarel and Mineral Oil

| Water Content (PPM) | Breakdown Voltage (ASTM D877) |             |
|---------------------|-------------------------------|-------------|
|                     | Askarel                       | Mineral Oil |
| 0                   | 70 KV                         | 50 KV       |
| 20                  | 55                            | 39          |
| 40                  | 47                            | 30          |
| 60                  | 40                            | 26          |
| 80                  | 38                            | 22          |
| 110                 | 10                            | 5           |

Table V  
Approximate Solubility of Water in Transformer  
Askarel and Mineral Oil

| °C  | °F  | Amount of Water (PPM) Dissolved |             |
|-----|-----|---------------------------------|-------------|
|     |     | Askarel                         | Mineral Oil |
| -20 | -4  | 8                               | 8           |
| -10 | 14  | 16                              | 10          |
| 0   | 32  | 28                              | 13          |
| 10  | 50  | 41                              | 20          |
| 20  | 68  | 65                              | 33          |
| 30  | 86  | 94                              | 58          |
| 40  | 104 | 128                             | 85          |
|     |     | 170                             | 130         |

#### XIV. Turbidity

... may be the visual sign of undissolved water, or may indicate dirt. Cloudiness may also result from cold precipitation of tin tetraphenyl "scavenger" that was used in the earlier Pyranol transformers. This scavenger begins to come out of solution around 15°F above zero. To redissolve it requires heating to 150-200°F and agitation.

High dielectric breakdown voltage will quickly indicate that any turbidity present is not moisture; that the insulating efficiency of the askarel is still excellent. However, if the dielectric strength is below 26 KV, moisture should be determined, using the Karl Fischer method (ASTM D1533-60).

*The dielectric breakdown voltage test for askarel serves primarily as an indicator for moisture. It is by far the most important maintenance test for transformer askarel.*

#### XV. Check Points for Maintaining Askarel Insulation

##### A. General Considerations:


Modern askarel transformers with welded construction or silicone or Viton® gaskets (hand hole-cover, switch and terminal compartment covers) and with properly constructed bushings require little maintenance. With properly constructed transformers, annual or semi-annual visual inspection and dielectric breakdown voltage test of the askarel fluid should suffice for routine maintenance checking over many years of service.

However, many askarel units were installed in the early 1930s — before the development of some of the better modern gasketing materials and before improved designs were developed for sealing out moisture. Such early units should be, and can be, modernized. Leaky or deteriorated gaskets should be replaced. If the askarel has become contaminated, it should be reconditioned. At the same time, a general clean-up of the unit and possible refinishing may be desirable.

If it is not convenient to take an old transformer out of service for general repairs, leaky gaskets can be sealed temporarily by painting over the leaky area with epoxy cement.

A survey of users indicates a good number of early-built askarel transformers (over 20 years old) are kept in continuous service in critical installations by the following steps (instead of modernization).

The operating units are equipped with compound pressure gauges for reading pressure above and below atmospheric. Positive

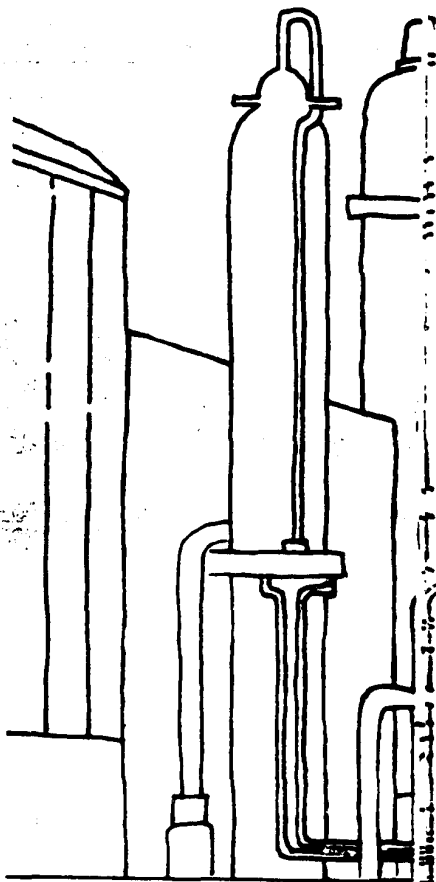

Trademark of E. I. DuPont de Nemours & Company, Inc.



pressure is maintained on the shell by introducing nitrogen at 2 to 3 pounds above atmospheric. Regular workmen in the area daily record the temperature and pressure. If a sudden pressure drop is noted more nitrogen is introduced and the gaskets are checked for leaks with soap solution. Leaks are sealed by applying epoxy cement.

8. Modern Sealing Procedures:  
Transformer purchasers should specify the following modern techniques for sealing:

1. Welding Construction: Covers, radiator connections, switch and terminal housings, instrument connections, etc. should be welded.
2. Bushing Connections: A number of bushings have been developed to obtain a proper seal for the electrical connection through the tank wall. They are classified as follows:
  - 1) Welded Type: (Bushing flange welded to tank wall)
    - a. Cast resin bushing with a molded seal to the bushing stud and external stainless steel or copper flanges.
    - b. Rolled flange bushing with the metal to porcelain seal at the cap and flange made by being rolled into grooves in the porcelain over silicone rubber rings. The seal between the cap and stud is made by welding.
    - c. Porcelain or glass bushings with metal to glass or metal to porcelain seals.
  - 2) Bolted Type: (Bolted to tank wall)
    - a. Cast resin bushings with either cast or metal flanges containing recessed gasket grooves.
    - b. Porcelain or glass bushings with flanges containing recessed grooves or gasket stop.


The gaskets may be either of rectangular or circular cross-section, usually  $\frac{1}{8}$  inch thick. Bushings with recessed grooves are suitable to use with cork, cork-nitrile rubber combinations or nitrile rubber as well as gasket materials such as silicone or Viton.

3. Small Size Connections: When not possible to weld, small size connection seals should be made with Flexitallic<sup>®</sup> stainless steel rings. The surfaces must be machined and parallel. The filler between the steel laminations of the Flexitallic ring should be either silicone or Viton.
4. Gaskets for Hand-Hole Covers: Modern design specified silicone gaskets. Such gaskets must be retained in a groove. The groove preferably is machined into the flange or cover. However, it can also be formed by welding concentric steel strips to the flange or the cover. Generally the gaskets should be  $\frac{5}{16}$  to  $\frac{1}{2}$  in. thick for covers, depending on the depth of the groove or stop. A rectangular cross-section is usually used.

The silicone material should be Dow Corning No. 50 Silastic<sup>™</sup> or equivalent. This is a low compression set material. For best sealing 20-25% compression is recommended, with ample clearance in the groove or stop to allow for this compression.

No cement is required. With reasonable care the gasket is removable without damage and is reusable.

Silastic 50 is slightly swelled by askarel which contributes to the tightness of the seal. It is not deteriorated by askarel fluid or vapors. It resists weathering and it is thermally stable and

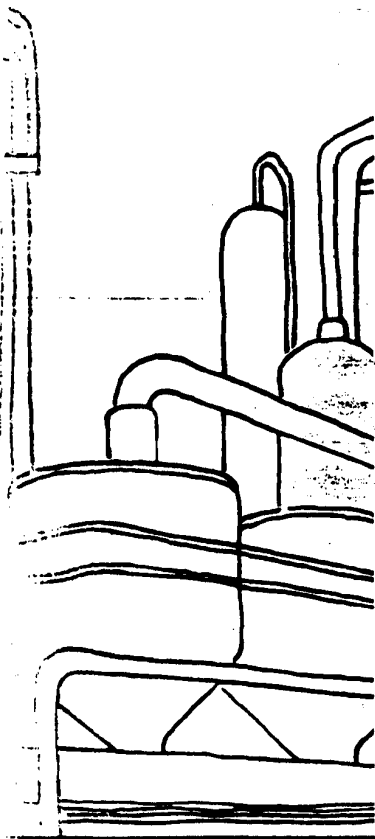

\*Trademark of Flexitallic Gasket Company  
\*\*Trademark of Dow Corning

flexible at all operating temperatures. It is an excellent moisture barrier.

NOTE: Dow Corning, Midland, Michigan will supply a list of Silastic 50 gasket fabricators to all transformer manufacturers or users. They will also furnish technical data. See Appendix J: Seals, Properties and Procurements.

#### The Outer Sealing Arrangements:

The outside type gaskets consist of either cork or cork-nitrile rubber combinations or straight nitrile rubber.

\* **Cork-Nitrile Combinations:** Covers for the main tank, wind holes, switch and terminal chambers, relief diaphragms, etc., are held in place by studs welded to the flange or by bolts. The gaskets are cut with openings and placed over the bolts. Often Shellac (Westinghouse Style No. 1150419, or General Electric Company's Glyptal<sup>®</sup> 1276) is used to cement the cork to the flanges.

The following is recommended for sealing with the cork — nitrile rubber combinations:

Use Armstrong NC-757 cork-nitrile material or equivalent. The gasket can be cut from a single sheet or by scarfing strips of the material. A convenient method for joining strips is to make a Keystone Type joint. For this purpose, Westinghouse, Sharon, Pennsylvania, offers their gasket cutter Style No. 328 8614 G01, (about \$15).

The joints — and also the gasket — should be cemented to the flange, using one of the above cements. Excess cement should not be allowed to reach the interior of the transformer.

After installation and bolting, the outside edge of the gasket should be coated thoroughly with epoxy cement to increase weather resistance.


This epoxy cement is a paste to which a curing catalyst is added immediately before use. Typical are:


- a. **Epoxy Patch Kit #1-C**  
Hysol Corporation, Olean, New York
  - b. **Scotchcast<sup>™</sup> Resin #4**  
Minnesota Mining & Manufacturing Company  
St. Paul, Minnesota
  - c. **Adhesive A-1 and Activator Type B**  
Armstrong Products Company  
Argonne Road, Warsaw, Indiana
  - d. **Adhesive 9880-1, Synthetics Organic Company,**  
Cleveland, Ohio, used with activator diethylene triamine  
(Carbide and Carbon Chemical Company)
2. **Straight Nitrile Rubber:** When straight nitrile rubber was originally used, invariably the gasket was recessed in a groove. This was to prevent gasket flow and to protect the material against excessive compression. Although this type seal was not cemented, the nitrile rubber gasket is not reusable.

Since grooves or stops have already been provided for the nitrile rubber seal, Silastic 50 can be easily substituted and is recommended. This conforms with modern practice.

**XVI. Periodic Fluid Inspection and What Checkpoints Mean**  
On a regular schedule — at six, nine, or twelve-month intervals — make a simple visual inspection of your askarel insulation and run a dielectric breakdown voltage check.

<sup>1</sup>Trademark of General Electric Company.  
<sup>2</sup>Trademark of Minnesota Mining & Manufacturing Company.

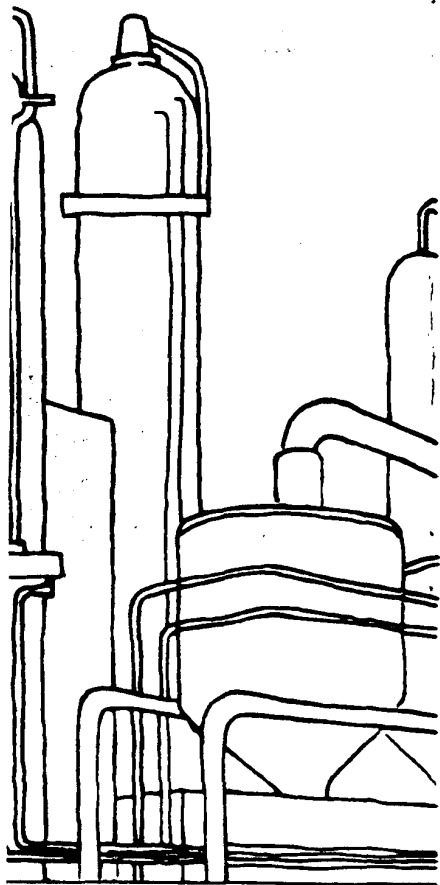

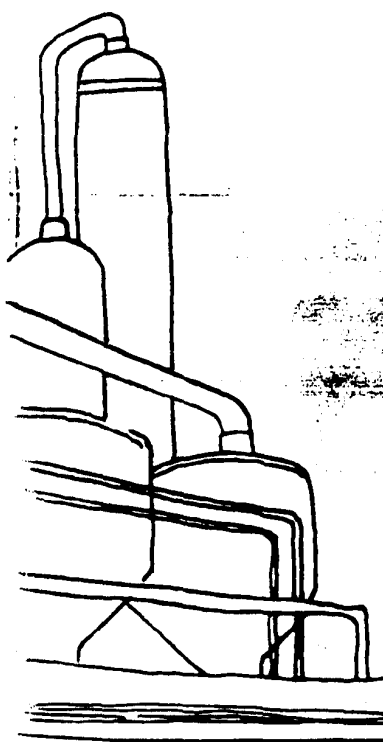

A. Visual Inspection:

Askarel is a clear, faint-yellow liquid. After long-term use this color may gradually intensify to light brown. The fluid should remain clear and free from turbidity or cloudiness.

Any color change — such as to a green, red or blue cast — indicates extraction of impurities (color materials) from the solid insulation. If a distinct foreign color pick-up is noted, check the complete range of electrical characteristics and notify the transformer maker. Blackening of the askarel may indicate an arcing condition. Other color changes alone are not danger signals since the dielectric breakdown voltage is not likely to be impaired.

B. Dielectric Breakdown Voltage

If the dielectric breakdown voltage has decreased significantly from the last inspection, or if it has gradually decreased below 26 KV range (at 25°C) — RUN A CHECK FOR MOISTURE. Use ASTM D1533 (Karl Fischer Method).

The dielectric breakdown voltage of askarel is the major indicator to the operating efficiency of your liquid insulation. Besides the visual inspection tests, dielectric breakdown voltage is the only test necessary to run on a routine basis. Well-sealed askarel transformers have service records of 25 to 30 years on the original askarel.

XVIII. Inspection Checklist

1. If askarel is clear — even though darkened to light brown, has no sediment or turbidity, has dielectric breakdown voltage over 26 KV — give it the inspection "OK".
2. If askarel is clear, but has foreign color of blue, green, red ... it is "extracting color" from internal materials. This is not, of itself, an operating hazard when the dielectric breakdown voltage stays over 26 KV and moisture remains low. However, this rare occurrence calls for checking into the condition of the interior construction and consulting the transformer maker. However, when sampling the fluid care should be taken to avoid getting color into the askarel from paint that may be inside or outside of the sample valve.
3. If the moisture content is found to be above 70 ppm at operating temperature, then sampling should be done at more frequent intervals to establish a possible trend, particularly on outdoor installations.
4. If askarel is clear, but dielectric breakdown voltage drops to 22 or lower KV, and moisture rises over 80 ppm when sampled at operating temperature ... the askarel is ready for simple "refining". If the moisture is near the saturation level (about 125 ppm at room temperature) a thorough inspection should be made for water droplets in the transformer tank, and even for "globules" of water floating on the askarel surface. If found, the transformer manufacturer should be consulted for reconditioning both the transformer and the fluid.
5. If askarel is dark brown to black, if black particles of carbon are seen, and dielectric strength is low ... the askarel has been broken down by arcing. It cannot be refined and should be removed and incinerated under proper conditions. (See ANSI C107.1-1974, Section 4.1.8).

If any of these five simple inspection tests appear out of the ordinary or the relationship between appearance and test values is abnormal, contact your transformer supplier for a complete analysis.

Whenever a sample is to be shipped to Monsanto, please follow the directions shown under: "SAMPLING ASKAREL".

### XVIII. Contamination in Transformers

Moisture, particulate matter and arced decomposition products are known to be serious contaminating influences on transformer askarel.

The power factor test normally used for the detection of contamination in mineral oil filled transformers is of little use for this purpose in askarel filled transformers, due to the extreme effect of extraneous soluble polar materials. This increase in power factor as illustrated in Table VI has no adverse effect on dielectric breakdown voltage.

Table VI  
Effect of Common Insulation Materials on Power  
Factor and Dielectric Strength  
(Heat Aged 96 Hours in Askarel at 100°C.)

| Material Immersed          | Askarel After Exposure                        |                                 |
|----------------------------|-----------------------------------------------|---------------------------------|
|                            | Power Factor,<br>Percent at 60<br>cyc., 100°C | Dielectric<br>Strength<br>25°C. |
| None (control)             | 1.0                                           | 35 KV                           |
| Black varnished cloth      | 85.0                                          | 42                              |
| Copper                     | 1.5                                           | 40                              |
| Pressboard                 | 2.0                                           | 37                              |
| Manila paper               | 1.5                                           | 39                              |
| Phenol formaldehyde resins | 1.6                                           | 41                              |
| Shellac                    | 6.0                                           | 36                              |
| Iron                       | 5.0                                           | 39                              |
| Synthetic rubber           | 70.0                                          | 39                              |

Similarly, trace contaminants from commonly used construction materials can lower the volume-resistivity of askarel, without affecting its dielectric breakdown voltage. This is shown in Table VII.

Table VII  
Effect of Common Insulation Materials  
on Volume Resistivity of Askarel


| Sample                                             | Volume Resistivity<br>$\times 10^9$ ohm-cm (at<br>100°C., 500 Volts<br>DC., 0.1" gap) |
|----------------------------------------------------|---------------------------------------------------------------------------------------|
| 1. New askarel before heat aging                   | 2,000                                                                                 |
| 2. New askarel after heat aging 96 hours at 100°C. | 1,900                                                                                 |
| 3. After heat aging with 1 sq. inch specimens of:  |                                                                                       |
| a. Phenolic resin tap changer material             | 1,200                                                                                 |
| b. Paper                                           | 750                                                                                   |
| c. Grade A pressboard (tan)                        | 500                                                                                   |
| d. Grade A pressboard (gray)                       | 500                                                                                   |
| e. Grade A pressboard, laminated strip             | 400                                                                                   |
| f. Cotton wrapping                                 | 300                                                                                   |
| g. Glyptal 1275 cement, cured 48 hrs. at 110°C     | 100                                                                                   |

While trace contamination easily lowers volume resistivity from high levels, it is important to note that heavy contamination (as when arced) does not lower the resistivity below the order of  $10^9$  ohm-cm. at 100°C.

The different behavior of askarel vs. mineral oil in these respects can be summarized as follows:

High power factor and low volume resistivity in transformer mineral oils are commonly regarded as "danger signals" that the oil has deteriorated and broken down chemically or excessive moisture is present.

This is NOT TRUE of askarel liquid insulation unless the dielectric breakdown voltage is low or the moisture content is high.

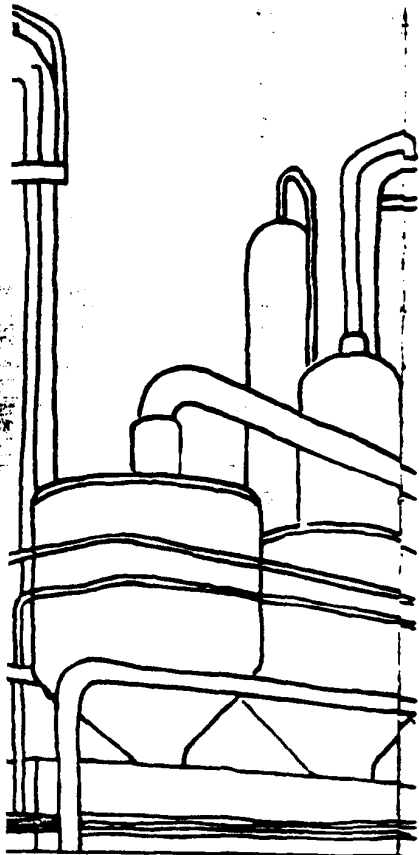

Manufacturers of askarel type transformers point out that it is quite well known that askarel transformers with initial power factor of the askarel fluid in excess of 50% at room temperature and 60 Hz are giving satisfactory service life. However, there needs to be assurance that both dielectric breakdown voltage and moisture are at satisfactory levels and do not show adverse trends.

#### XIX. ASTM D3255 Method For Investigating The Compatibility of Transformer Insulation and Construction Materials in Askarels

This method uses the change of electrical and/or chemical characteristics of transformer askarel resulting from its controlled exposure to insulation and construction materials, in order to evaluate their immediate major "contamination" effect on the askarel fluid. Delayed or long time contamination effects may not be detected.

The method also utilizes various physical tests on the insulation and construction materials after controlled exposure to the askarel to determine the compatibility of these materials with transformer askarel.

Properly proportioned specimens of the insulation or structural materials are immersed in refined askarel for 168 hours at  $100 \pm 1^\circ\text{C}$  in a forced draft oven. Changes in electrical and chemical properties of the transformer askarel are compared against a control sample of the askarel treated in the same manner, in absence of the test specimens.

Dissipation factor (ASTM D 924) change is one of the criteria used. The askarel fluid is refined by absorptive treatment to a dissipation factor level of 0.05 max. at  $100^\circ\text{C}$  and 60 Hz and 0.01 max. at  $25^\circ\text{C}$  and 60 Hz. Corresponding values of the askarel fluid after heating 168 hours at  $100^\circ\text{C}$  in absence of a test specimen are 0.075 and 0.02 respectively. The maximum dissipation factor levels suggested for the askarel after heating in presence of the test specimen are 0.20 at  $100^\circ\text{C}$  and 60 Hz and 0.04 at  $25^\circ\text{C}$  and 60 Hz.

#### XX. Refining Askarel for Reuse

##### A. Filtering Through Dry Blotter Paper to Remove Moisture and Extraneous Particles:

Most operators prefer portable refining apparatus, such as a plate press fitted with a dolly, available from Sparkler, Mundelein, Illinois or General Electric Company, Pittsfield, Massachusetts; or the earthen cartridge filter type available from Industrial Filter Corporation, Lebanon, Indiana. Filter paper liners for the plate press are available from Carl Schleicher and Schuell Company, Keane, New Hampshire and manufacturers of filter presses listed above.

The filter paper must be dried immediately before use. For best results, spread the paper for maximum surface exposure in a hot air circulating oven and heat it for 4 to 6 hours at  $110^\circ\text{C}$ .

Circulate the askarel hot (but not over  $40^\circ\text{C}$ ) through the filter fitted with the dry paper liners.

After filtration the dielectric breakdown voltage of the askarel should be 35 KV minimum.

##### PRECAUTIONS:

1. Filtering should not be done when the relative humidity exceeds 75%.
2. Any flexible hoses and gaskets on the refining equipment should be lined with or made of materials that will not be softened by contact with askarel fluid. (Materials lined with Silicone, Viton or Teflon<sup>®</sup> or flexible metal materials are suitable.)

<sup>®</sup>Trademark of E. I. DuPont DeNemours & Company, Inc.

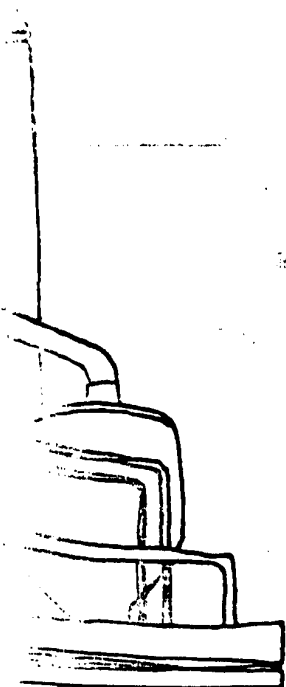


TABLE VIII  
Guide to Rate of Dissolved Water Removal  
By Filtering Askarel Through a Paper Press

| Fuses Through<br>Paper Press | Water in Askarel<br>PPM |
|------------------------------|-------------------------|
| 0                            | 115                     |
| 1                            | 35                      |
| 2                            | 22                      |
| 3                            | 18                      |
| 4                            | 12                      |
| 5                            | 10                      |
| 6                            | 10                      |

- B. Disposal of Solid Wastes:  
The ANSI guide C107.1-1974, Section 4.1.6 gives detailed recommendations.

- C. Solid Insulation Requiring Drying:  
If the solid insulation of the transformer requires drying, consult the transformer manufacturer or an apparatus service shop, as in such case oven drying is preferred.

- D. Earth Treatment for Maximum Improvement of Power Factor and Volume Resistivity:

We question whether pumping and filtering the fluid solely to achieve a change in power factor or volume resistivity alone is justified in today's ecological climate regarding PCBs. We recommend that in these situations the original transformer manufacturer be contacted.

1. Procedure:


The askarel liquid should be relatively dry prior to the following earth filtration.

As a coating on the filter paper surface use finely divided Actapulplus® clay or Fuller's earth dried and activated by heating for 12 hours at 300-350°F immediately prior to use. The amount of earth used should be 0.1 to 0.2 percent by weight on the weight of the askarel to be treated. Askarel weighs about 12.5 pounds per gallon.

To deposit the earth evenly, stir one-third of the earth with a small portion of askarel in a clean container. Pump the mixture through the filter and follow with two more one-third portions. Then circulate askarel taken from near the top of the transformer, pass it warm (not over 55°C) through the earth-coated filter and feed back through the bottom transformer outlet. Continue circulation until the fluid is clear and test shows that the electrical properties are fully restored.

2. Effect of Earth on Removal of Scavengers

Only slight and insignificant loss by selective absorption of tin tetraphenyl and epoxides occurs when askarel is refined by treatment with 0.1 to 0.2 percent by weight of earth. To remove significant amounts of the scavengers requires repetitious treatment with much larger amounts of earth.

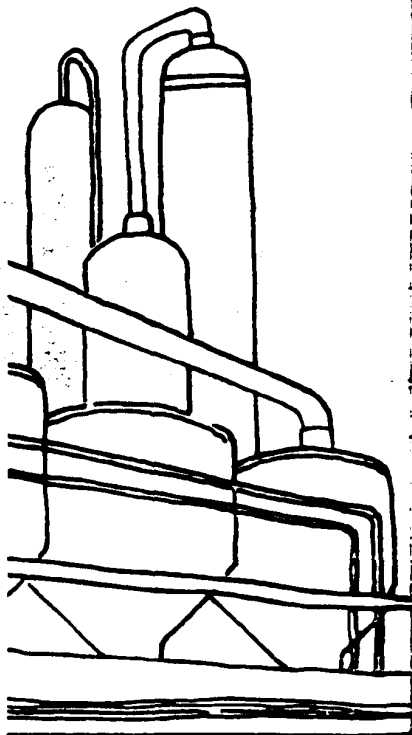

® Trademark of Engelhard Minerals and Chemicals Corp.

Table IX  
Approximate Relationship Showing the Insignificant  
Effect of Power Factor and Volume-Resistivity on  
Dielectric Breakdown Voltage of Transformer Askarel

| Power Factor<br>(60 cyc.) |       | Volume Resistivity<br>$\times 10^9$ ohm-cm (at<br>100°C, 500 Volts<br>D.C. 0.1" gap) | Breakdown<br>Voltage<br>25°C, 0.1" gap |
|---------------------------|-------|--------------------------------------------------------------------------------------|----------------------------------------|
| 100°C                     | 25°C  |                                                                                      |                                        |
| 2%                        | 0.05% | 1500                                                                                 | 35 KV                                  |
| 55%                       | 0.1%  | 500                                                                                  | 35                                     |
| 15%                       | 0.7%  | 100                                                                                  | 35                                     |
| 20-25%                    | 2.0%  | 60-70                                                                                | 35                                     |
| 40-50%                    | —     | 25                                                                                   | 35                                     |

#### XXI. Cleaning Arced Transformers

If a unit has arced so that the askarel is no longer fit for use, a thorough cleaning of the unit is necessary before refilling with new askarel insulation and returning it to service\*. Follow this procedure insuring care is taken to prevent any loss of liquid askarel to effluent streams.

- Drain out all dark, carbon-contaminated askarel. Arrange to have the scrap fluid incinerated under proper conditions. (See ANSI Committee C107 report.)
- Carefully brush carbon deposits from internal parts and insulation, using a soft bristle brush making sure that insulation is not damaged.
- Flush thoroughly using new askarel — *not* an oil, *not* a cleaning solvent.
- Flush a second time with fresh askarel; drain; then fill to the proper level with new askarel.
- Energize transformer to warm the fluid for 24 to 48 hours; then circulate the askarel through a filter, returning it to the unit filtered and ready for use.

#### XXII. Sampling Askarel

Take a sample as close to the top of the liquid surface as possible. Many large askarel transformers have a built-in sampling tube near the surface for convenient sampling. Then, to make sure that your sample truly represents your askarel insulation, take another sample from the bottom. If additional sampling tube connections are contrived on the valves for easier sampling, make the tubes of clean glass, stainless steel, aluminum or tin for rigid types; and silicone, or Viton or Teflon tubing for flexible types.

Use NEW containers for the askarel sample. A new and thoroughly pre-dried, small-mouth quart glass bottle fitted with a Bakelite\*\* screw cap with aluminum or tin cap liner is recommended for quick, on-site testing. (If complete analysis is to be made, a 5-pint size sample is required.)

Be sure that the new bottle does not stand open to collect dust or moisture. Rinse the sample bottle and cap lining two or three times with askarel from the transformer, then fill it. If the sample will be tested promptly, a clear glass bottle can be used. If sample is to be stored indefinitely, use an amber glass bottle or wrap clear glass with aluminum foil.

- Select a dry day. Do not sample insulation on a warm, moist day when humidity exceeds 75% and ...


\*This assumes that the cause of arcing has been established and corrections made. When severe arcing occurs, major repairs are usually necessary and the unit rebuilt. This procedure can be applied for flushing out the repaired units.

\*\*Trademark of Union Carbide Corporation

- B. Make sure that the askarel is at least as warm as the surrounding air. (Cold liquids can condense moisture from humid air.)
- C. When sampling askarel from transformers, it is best to take the sample when the unit is warm and operating at average or maximum load, especially for a check on moisture as reflected by a dielectric breakdown voltage test. Sampling the warm askarel more truly represents its condition during operation.

Experience shows that water will migrate from a transformer's solid insulation to the askarel liquid and vice versa, depending on temperature. Therefore, when the transformer is hot, the moisture is most likely to be found in the liquid. This accounts largely for periodic variations in dielectric breakdown voltage. For example, a relatively high dielectric breakdown voltage may be found during winter months and a relatively low dielectric breakdown voltage during the summer months on samples taken from the same unit.

When testing has been completed, the remainder of the fluid sample should be destroyed by high temperature incineration described in Section VIII.

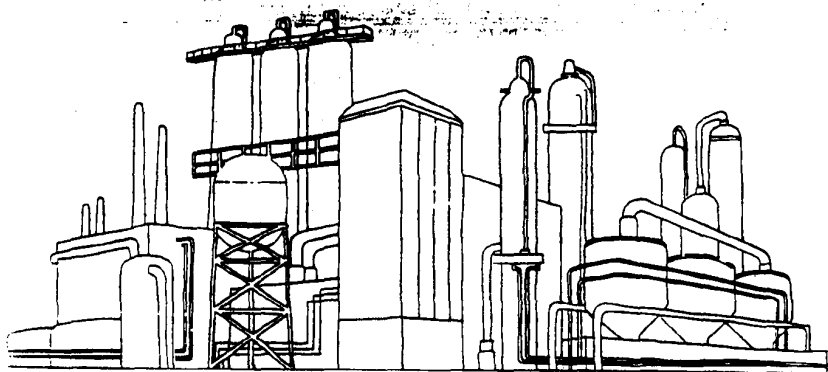

# Section B

## Askarel Filled Switches and Terminal Chambers

### I. Introduction

High voltage leads are usually connected to askarel or mineral oil-filled network transformers and power centers through terminal chambers and switches. In some cases terminal chambers are not used, and the high voltage leads are connected directly to the switch terminals. They may be filled with either askarel or mineral oil. Switches are usually rotary or drum type fitted with a revolving block and porcelain unit as the principal element arranged for three-phase service.

Askarel transformers with attached switches have been in use for about 30 years. When they were first introduced, the availability of insulating and gasketing materials was rather limited and even the best materials at the time had no service history. As a result, inadequate gasketing materials such as cork, nitrile rubber, and nitrile rubber-and-cork particles were used. While satisfactory for a limited period of time, these materials cannot be depended upon for the expected long life of the equipment.

The terminal chamber is usually above or below the switch compartment and separated by a steel wall through which the bushings are inserted. When bushings are properly selected and correctly installed, there is no leakage from one compartment to the other. With poor bushing seals, and the terminal chamber above the switch, potting compounds or cable oil can seep into the askarel. When the terminal chamber is below the switch, askarel can drain into the terminal chamber.

### II. Sources of Contamination

There are three possible sources of contamination for askarel in switches and terminal chambers; they rank in this order of frequency: (1) water entering through poor gaskets; (2) decomposition products from arcing when switch is used to break magnetizing current; (3) entrance of pothead or cable compounds through leaky bushing seals.

Unlike an askarel transformer where the amount of contaminant is likely to be very small (probably only trace amounts) in relation to the volume of askarel fluid — in switches or terminal chambers with faulty seals, the amount of contamination can be relatively large.

Experience has shown that, based on the number of installed askarel-switch units, the percentage of failures is extremely small. When investigated, it has been found that most failures originate in the switch chamber. Water is the chief source of contamination. However, heavy contamination of askarel with petrolatum and asphalt material due to leakage, have caused a few failures.

Petrolatum is used frequently for filling terminal chambers. When either cable oil or petrolatum seeps into askarel, no great harm results. The fire resistance will be somewhat decreased and power factor of the askarel will increase with an accompanying drop in resistivity. While highly undesirable, it is doubtful that failure of the unit results. Where asphaltic compounds are used in place of petrolatum, the danger is increased somewhat because asphaltic contamination may cause excessively high dielectric losses in the askarel.

When the terminal chamber is below the switch chamber, the potting compound can be contaminated by askarel if the bushing leads are leaky. This is undesirable because the askarel will increase the power factor and conductivity of the potting compound or cable oil and develop heat from dielectric loss. If this mixture is drawn into the cable

isolation, a cable failure is likely. This again emphasizes the importance of tight bushing assemblies.

### III. Sealing Switches and Terminal Chambers

Proper bushing construction, use of Silastic seals and welding wherever possible is highly desirable (as covered in Section A). Where an elastomeric seal is to be used in contact with both askarel and petroleum oil, DuPont's Viton is suggested.

On new equipment the user should specify these modern sealing arrangements to keep out contaminants and minimize maintenance.

### IV. Askarel Used Under Mild Arcing Conditions

The IEEE Guide for Transformer Askarel calls attention to the following:

"Askarel is used, to some extent, in apparatus where it is subjected to light intermittent arcing, such as in self-contained induction regulators, where operating switches are continually producing slight arcs, in transformer de-energizing switches, etc.. Under normal conditions, deterioration of the askarel is very slight. However, improperly adjusted or defective switches in this type of apparatus can produce excessive and prolonged arcing and accelerated deterioration of the askarel. It is recommended that when askarel is used under these conditions, checks of the liquid, especially for moisture and dielectric breakdown voltage made more frequently than when it is used only as a cooling and insulating fluid. Deterioration of this type is indicated by a blackening of the liquid. It can usually be reconditioned as previously described. Special attention should be given to maintaining the scavenger at the appropriate concentration."

### V. Maintenance for Askarel Filled Switches

- A. Switches used for grounding after power source has been de-energized will not undergo arcing.
- B. Switches interrupting magnetizing current will be subject to arcing; the amount of decomposition will depend on power interrupted, time and frequency of operation. As a general rule, the liquid should be checked after 5 to 10 operations.
  1. On newly installed switches, check the askarel at 3, 6 and 12 month intervals; if found satisfactory, check once annually thereafter. With proper attention to the gasketing of covers and bushings, experience will probably indicate that less frequent inspection is warranted.
  2. Check askarel for:
    - a. Dielectric breakdown voltage (ASTM D877): It should be 28 KV minimum. If dielectric breakdown voltage is low, confirm presence of water by Karl Fischer method ASTM D-1533. Filter to remove moisture. Dielectric strength should then be 30 KV minimum.
    - b. Presence of carbon from arcing: Fluid should be relatively free of carbon. If badly arced and very black, replace fluid. If only minute amounts of carbon are present, filtration is recommended. Check power factor of liquid (should not be over 5% at 25°C and 60 cycles). Flush out switch chamber with several gallons of fresh askarel before refilling.
  3. If there is discoloration, high power factor, detectable change in specific gravity or refractive index, or if fluid flashes below 250°F, there is a possibility of seepage of potting compound into the switch compartment. In this case, correct any leaky bushing seals with proper replacements and fill with new askarel.
  4. If terminal chamber is below switch, check potting compound for presence of askarel (can usually be detected by odor or by an increase in specific gravity). If askarel is present, correct any leaky bushing seals with proper replacements, and renew compounds.
  5. Examine cover gaskets visually. Deterioration can be detected

- by swelling and cracking of the exposed edge. In cases of severe deterioration, liquid seepage is usually present.
6. Check for leakage at packing gland of switching shaft. If leaking, repack with a Silastic ring type gasket.

#### VI. Askarel Under Excessive Temperature or Fault Conditions

The IEEE Guide also points out that,

"Chlorobenzenes used in transformer askarels begin to boil at temperatures of about 205°C, under atmospheric conditions. If the material is heated to such high temperature in a sealed system, pressure develops. Pressure will also develop in the system if the askarel is arced sufficiently to generate copious hydrogen chloride gas.

"Therefore, it is recommended that wherever possible, sealed askarel-filled equipment be provided with pressure relief devices. These devices must be large enough to provide immediate relief at a definite pressure, and to prevent further build up of pressure if decomposition continues. It must be remembered that the presence of devices of this sort does not necessarily preclude the rupturing of containing vessels, since pressure build up can be extremely rapid under violent arcing conditions."

## Section C Toxicity & Safe Handling

### I. Inhalation

At ordinary temperatures the chlorinated biphenyls in Askarel have not presented industrial toxicological problems. The hazard of potential toxic exposure varies with their volatility: the lower-chlorinated, more-volatile ones present more of a potential problem from the standpoint of both inhalation and skin contact. When Askarel fluids are used at elevated temperatures, engineering controls must be applied, either by the use of closed systems or by effective local-exhaust ventilation together with general workroom exhaust.

Vapors of Askarel at room temperature should not be breathed in a confined space, and no vapor of any fluid evolved at elevated temperatures should be allowed to be dispersed into the general workroom.


Inhalation tests on animals indicate that the maximum safe concentration of vapor is in the range of from 0.5 to 1.0 milligram per cubic meter of air. The threshold limit value (maximum allowable concentration of an 8-hour working day) set by the American Conference of Government Hygienists are 1.0 milligram of the lower-chlorinated biphenyl compounds per cubic meter of air and 0.5 milligram of the more-highly-chlorinated compounds, per cubic meter of air.

### II. Skin Contact

Prolonged or repeated skin contact with the Askarel fluids must be avoided by the use of gloves and protective garments, because of the possible occurrence of a condition called chloracne. Although reports of this condition caused by Askarel are rare, it can be produced by excessive skin contact. If the fluid is spilled on the skin the skin should be washed in the usual manner with a soap solution.

A burn caused by contact with a hot Askarel should be treated like any ordinary burn.

For disposal instructions of Askarel fluids, see Section A - VIII, page 6.



## Section D

# Analytical Services on Transformer Askarel Available From Monsanto

Persons who are not wishing to make their own fluid analyses can obtain the service from Monsanto. Simply contact Monsanto to specify what analyses are wanted. You will be sent the proper-sized, clean sample container, fitted with a proper label. When you receive this, carefully take your sample (following the procedure for sampling in this guide). Send the container to Monsanto's laboratory. Charges listed include sample container and laboratory costs. The charges are those in effect August 8, 1970, and are subject to change.

### Types of Analyses Available

#### Analysis 1)

#### ROUTINE MAINTENANCE CHECK

Total Charge: \$35.00 Per Sample

To determine the general condition of the fluid and find whether further analysis is necessary. (one-quart sample required)

|                     |                              |
|---------------------|------------------------------|
| Properties Tested   | Dielectric Breakdown Voltage |
| Color and Condition | Moisture                     |

You will be notified of the results of this test. If further testing is indicated, and you want a complete analysis, you will be sent a five-pint sample container. This sample will be used for the following series of tests:

#### Analysis 2)

#### COMPLETE ANALYSIS

Total Charge: \$165.00 Per Sample

(1) To determine the extent of fluid contamination, (2) earth refinement to determine what degree of restoration of electrical and insulating properties is possible, (3) check test to see how the fluid responded to earth treatment.

#### a) Complete Analysis: to determine the extent of contamination

|                     |                                                    |
|---------------------|----------------------------------------------------|
| Properties Tested   | Free Chlorides                                     |
| Color and Condition | Acidity                                            |
| Specific Gravity    | Dielectric Breakdown Voltage                       |
| Refractive Index    | Power Factor, Dielectric Constant, and Resistivity |
| Water               |                                                    |

#### b) Earth Refinement Response:

Consists of treatment for 2.5 hours at 50-60°C. with 0.1 to 0.2 percent by weight of properly conditioned Attapulgus clay and then filtration through dry filter paper.

#### c) Analysis After Laboratory Earth Refinement:

|                   |                                                    |
|-------------------|----------------------------------------------------|
| Properties Tested | Acidity                                            |
| Refractive Index  | Dielectric Breakdown Voltage                       |
| Water             | Power Factor, Dielectric Constant, and Resistivity |
| Free Chlorides    |                                                    |

You will be notified of the results of this test series on your sample. Then after refining your entire transformer fluid fill you can check on the results by requesting the following analysis:

#### Analysis 3)

#### ANALYSIS AFTER EARTH REFINEMENT

Total Charge: \$70.00 Per Sample

(This charge will not apply when analyses 1 and 2 have already been made.)

To determine whether the entire lot of the askarel fill responded to the same extent as the laboratory sample. (five-pint sample required)

|                     |                                                    |
|---------------------|----------------------------------------------------|
| Properties Tested   | Free Chlorides                                     |
| Color and Condition | Acidity                                            |
| Refractive Index    | Dielectric Breakdown Voltage                       |
| Water               | Power Factor, Dielectric Constant, and Resistivity |

To arrange for the tests described above write to the following address:

David Wood  
Monsanto Industrial Chemicals Company  
800 North Lindbergh Blvd.  
St. Louis, Missouri 63166

Samples to be tested should be clearly marked for identification and sent directly to:

Monsanto Company  
W. G. Krummrich Laboratory  
Sagest, Illinois 62201  
Attention J. A. Gloeckner

# Section E Appendices

## APPENDIX A

Askarel Stability and Composition of Arc Formed Gas: Askarel insulation is one of the most inert, chemically-stable heat resistant, non-corrosive liquids known. It will not break down, oxidize or sludge when exposed to air and high temperatures, 150°C. or even somewhat higher. Arcing, however, will break down the compound to liberate some hydrogen chloride and small amounts of carbon.

### APPROXIMATE COMPOSITION ARC-FORMED GAS FROM TRANSFORMER ASKAREL BLENDS ASTM TYPES D AND G (INERTEEN 70-30 AND PYRANOL A13B3B-3, RESPECTIVELY)

| Gas                                                 | Amount |
|-----------------------------------------------------|--------|
| carbon monoxide                                     | 0.3%   |
| carbon dioxide                                      | 0.3%   |
| oxygen                                              | 0.6%   |
| inert gases                                         | 1.5%   |
| hydrogen chloride<br>(note the absence of phosgene) | 97.3%  |

This arc-formed gas from ASTM Type D and Type F transformer askarels is non-flammable and non-combustible.

For all practical purposes, the amount of gas liberated from askarel under a given set of arcing conditions is about 100 cubic centimeters per kilowatt-second.

## APPENDIX B

### SOLUBILITY OF GAS IN TRANSFORMER ASKARELS ASTM TYPES D AND G

|                                | Percent of Gas By Volume Corrected to: |       |             |       |
|--------------------------------|----------------------------------------|-------|-------------|-------|
|                                | 25°C. 760 mm                           |       | 0°C. 760 mm |       |
|                                | 25°C                                   | 100°C | 25°C        | 100°C |
| Carbon dioxide                 | 71%                                    | 47%   | —           | —     |
| Air                            | 5.7                                    | 4.9   | 5.8         | 5.0   |
| Nitrogen                       | 6.0                                    | 4.8   | 5.5         | 4.4   |
| Hydrogen chloride <sup>1</sup> | 37.8                                   | 50.9  | —           | —     |

<sup>1</sup>In absence of scavenger

## APPENDIX C

### EFFECT OF TEMPERATURE ON DIELECTRIC BREAKDOWN VOLTAGE OF ASKAREL

| Temperature °C | Dielectric Breakdown<br>Voltage<br>ASTM D877 |
|----------------|----------------------------------------------|
| -60            | 67 KV                                        |
| -40            | 63                                           |
| -20            | 57                                           |
| 0              | 55                                           |
| 20             | 50                                           |
| 40             | 50                                           |
| 60             | 48                                           |
| 80             | 45                                           |

## APPENDIX D

### COMPARISON OF THE APPROXIMATE VISCOSITY IN SAYBOLT UNIVERSAL SECONDS OF TRANSFORMER ASKARELS AND MINERAL OIL

| Temp. °C | Pyranol<br>A13838-3 | 10-C Mineral<br>Oil | Inerteen<br>70-30 |
|----------|---------------------|---------------------|-------------------|
| -20      | 1,000               | 1,000               | 2,800             |
| 0        | 100                 | 150                 | 195               |
| 20       | 70                  | 85                  | 85                |
| 40       | 45                  | 49                  | 50                |
| 60       | 39                  | 40                  | 40                |
| 80       | 34                  | 34                  | 36                |
| 100      | 30                  | 30                  | 33                |

## APPENDIX E

### THE DENSITY OF INERTEEN 70-30 AND TRANSFORMER PYRANOL A13838-3 Approx. Density gm/cc.

| Temp. °C | Inerteen<br>70-30 | Pyranol<br>A13838-3 |
|----------|-------------------|---------------------|
| 0        | 1.574             | 1.577               |
| 20       | 1.562             | 1.566               |
| 40       | 1.529             | 1.532               |
| 60       | 1.507             | 1.510               |
| 80       | 1.486             | 1.488               |

## APPENDIX F

The thermal conductivity values of transformer Pyranol A13838-3 at 27°C and 58°C are  $26.2$  and  $25.8 \times 10^{-6}$  calories centimeters<sup>-1</sup>, degrees centigrade<sup>-1</sup>, second<sup>-1</sup>, respectively. Or, approximately 0.06 BTU per (hr.) (sq. ft.) (°F.) per foot. This same approximation applies to Inerteen 70-30.

## APPENDIX G

### Heat Capacity

Over the temperature range of 26° to 128°C the specific heat of transformer askarel is close to 0.30 calories per gram per degree.

## APPENDIX H

### Coefficient of Expansion

The average coefficient of expansion of transformer askarel over the temperature range 20 to 100°C is 0.0007 cc/cc/°C. One gallon would increase to 1.056 gallons on heating from 20 to 100°C.

## APPENDIX I

### Fire Resistance

Askarels of various compositional types are used. Under arcing conditions the gases produced, while consisting of predominantly non-combustible hydrogen chloride can yield varying amounts of combustible gases depending upon the askarel type.

Insulation systems incorporating these askarels and cellulosic or other organic materials may, when arced, produce gaseous mixtures which are moderately flammable. As a precaution, such gases should be removed from the askarel by bubbling dry nitrogen through the askarel and flushing the gas space with dry nitrogen before any work is performed on the apparatus.

## APPENDIX J

### Seals, Properties and Procurement

Dow Corning Corporation, Midland, Michigan with Districts at Atlanta, Boston, Chicago, Cleveland, Dallas, Los Angeles, New York City, Washington, D.C. and Toronto has available Bulletin 08-019, August 1962 entitled "Silastic Design Data". This lists the gasket fabricators throughout the country from whom the "Silastic 50" gasketing can be purchased in sheet, extrusions or molded shapes.

Generally, Silastic 50 sheet goods are stocked by local die cutters, hence, could be generally purchased locally. Usually small quantities of gaskets are die cut. If larger quantities are needed, tools are made of the same type used to cut other elastomers.

Where the gasket is extruded for fitting into a machined groove or between gasket stops, Dow Corning advises use of a scarfed joint. This joint is then cemented using Dow Corning's Silastic 140 (clear) or their RTV 731 (white) materials, which air cure.

Dow Corning points out that the local "rubber" fabricators purchase the Silastic 50 in billet form. This is worked on a roll mill in preparation for sheeting or extrusion. Then to obtain the desired physical properties the fabricator must oven cure the Silastic 50 for 24 hours at 480°F.

### SPECIFICATIONS\*

|           |                                                        |             |
|-----------|--------------------------------------------------------|-------------|
|           | Color                                                  | White       |
|           | Specific Gravity at 77°F                               | 1.20 ± 0.02 |
| ASTM D876 | Hardness, Shore A, Scale                               | 45 to 60    |
| ASTM D412 | Tensile Strength, psi, min                             | 800         |
| ASTM D412 | Elongation, percent, min                               | 250         |
| ASTM D395 | Compression Set after 22 hrs<br>at 300°F, percent, max | 30          |

\*All physical properties measured on 0.075 inch thick samples molded 5 minutes at 240°F. and oven cured 24 hours at 480°F.

## APPENDIX K

### Caution Label

The following or equivalent caution statements should be fixed on all containers of transformer askarels and the transformers themselves:

This product contains Polychlorinated Biphenyls (PCBs). Care should be taken to prevent entry into the environment through spills, leakage, use, vaporization, or disposal of liquid or containers. Avoid prolonged breathing of vapors or mists. Avoid contact with eyes or prolonged contact with skin. If skin contact occurs, remove by washing with soap and water. Following eye contact, flush with water. In case of spillage onto clothing, the clothing should be removed as soon as practical and the skin washed. Dispose of any contaminated materials as suggested in the American National Standards Institute document C107.1, "Guidelines for Handling and Disposal of Capacitor and Transformer Grade Askarels, Containing Polychlorinated Biphenyls".

# Monsanto

### MONSANTO INDUSTRIAL CHEMICALS COMPANY

#### FUNCTIONAL PRODUCTS GROUP

800 N. LINDBERGH BLVD.

ST. LOUIS, MISSOURI 63166

The information herein regarding obtaining optimum results from askarel fluids in your transformer has been accumulated by Monsanto for over 40 years from the experience of makers and users of askarel transformers and it is believed will be helpful.

Nothing herein shall be construed as applying to other than askarel insulation. Data and maintenance suggestions herein do not apply to the other components of the transformer. All operating and maintenance suggestions recommended by the manufacturer of the transformer should also be carefully followed.

Because these maintenance directions apply only to the askarel insulation, Monsanto disclaims any liability for damage to property or injury to persons arising from transformer operation.

## U.S. CUSTOMER SERVICE CENTERS

**AKRON, OHIO 44313**  
240 Sampson Drive  
Box 5444  
Centros Development Park  
Tel. (216) 688-4111

**ATLANTA, GEORGIA 30339**  
320 Interstate North Parkway  
Suite 500  
Tel. (404) 434-4849

**HOUSTON, TEXAS 77058**  
1300 Post Oak Tower  
5051 Weatherford Road  
Tel. (713) 621-9850

**LOS ANGELES, CALIFORNIA**  
1401 Dove Street  
Suite 380  
Newport Beach, California 92660  
Tel. (714) 833-9150

**NEW YORK, NEW YORK 10038**  
1114 Avenue of the Americas  
Tel. (212) 754-6000

**ST. LOUIS, MISSOURI 63168**  
800 N. Lindbergh Blvd.  
Tel. (314) 694-1000

## INTERNATIONAL OFFICES

**ARGENTINA**  
Monsanto Argentina S.A.I.C.  
Avenida Madres 1020, Floors 17th & 18th  
Buenos Aires, Argentina

**AUSTRALIA**  
Monsanto Australia Limited  
East Tower, Princes Gate Bldg.  
151 Flinders Street  
Melbourne, Victoria 3001  
Australia

Monsanto Australia Limited  
38 Terry Street  
Rozelle, Sydney, NSW  
Australia 2039

Monsanto Australia Limited  
Post Office Box 11111, Adelaide  
South Australia 5001

Monsanto Australia Limited  
Brisbane  
P. O. Box 62, Hamilton Central  
Queensland, Australia 4007

Monsanto Australia Limited  
Perth  
P. O. Box 77  
Oudhove  
West Australia 6018

**AUSTRIA**  
Monsanto GmbH Austria  
Am Stadtpark  
(Hilton Center)  
A-1030 Wien, Austria

**BELGIUM**  
Monsanto Europe S.A.  
Avenue de Tervuren 270-272  
B-1150 Brussels, Belgium

Monsanto Europe NV/SA  
163 Middelheimweg  
2000 Antwerp, Belgium

**BRAZIL**  
Industrias Monsanto Ltda.  
891 Conselheiro  
First through Fifth Floors  
Sao Paulo, Brazil 01220

**CANADA**  
Monsanto Canada Ltd.  
175 Redvale Blvd.  
Reading, Ontario, Canada

Monsanto Canada Ltd.  
100 Park Royal, Suite 701  
West Vancouver, B.C., Canada

**CHILE**  
Monsanto Chile Comercial e Industrial  
Limitada  
Edificio Espino Oficina 503  
Calle Estadio 333  
Santiago de Chile

**COLOMBIA**  
Monsanto Colombianas Inc.  
Carrera 14, No 77-59  
Bogota, Colombia

**DENMARK**  
Monsanto A/S  
8 Ryvangenstegade  
DK 1864 Copenhagen  
Denmark

**EL SALVADOR**  
Monsanto Centroamerica (El Salvador) S.A.  
Edificio Plaza  
67 Avenida Sur y Calle e Santa Tecla  
San Salvador, El Salvador

**FEDERAL REPUBLIC OF GERMANY**  
Monsanto (Deutschland) GmbH  
Immermannstrasse 3  
D-4000 Dusseldorf,  
Federal Republic of Germany

**FINLAND**  
Monsanto (Skandinavia) AB  
Artalankatu 8 C 20  
00100 Helsinki 10, Finland

**FRANCE**  
Societe Monsanto S.A.  
9 rue d'Armenie  
75 Paris (8) France

**GUATEMALA**  
Monsanto Guatemala Inc.  
Edificio Casa  
7a Avenida 7-11 Zona 9  
Guatemala City, Guatemala

**HONG KONG**  
Monsanto Far East Ltd.  
Management House, 2nd Floor  
28 Canal Road West  
Hong Kong

**INDIA**  
Mirdle Chemicals Ltd.  
Welfare House  
11 Street Rd., Ballard Estate  
Bombay 400 001, India

Mirdle Chemicals Ltd.  
19 Rajendranath Mukherjee Rd.  
Chennai 700 001, India

Mirdle Chemicals Ltd.  
310-311 Linghi Chetty Street  
Madras 600 001, India

Mirdle Chemicals Ltd.  
3/8 Asaf Ali Road  
New Delhi 110 007, India

**INDONESIA**  
P. T. Monsanto Per Electronics  
181 Di. Dr. Sahadeti  
Jakarta, Indonesia

**ITALY**  
Monsanto Italiana S.p.A.  
Via Melchiorre Gioia 8  
Milano 20124, Italy

**JAPAN**  
Monsanto Japan Ltd.  
Room 217, Shin Kokusai Bldg.  
4-1, Marunouchi 3-chome  
Chiyoda-ku, Tokyo, Japan

**MALAYSIA**  
Monsanto Far East Ltd.  
(Malaysia Branch)  
118, Jalan Selayang  
Peting Jaya, Selangor, Malaysia

**MEXICO**  
Monsanto Comercial S.A. de C.V.  
Thurs No. 248  
Mexico 5, D.F., Mexico

**NETHERLANDS**  
Monsanto B.V.  
Jan van Nieuwstrat 53-59  
Den Haag  
Holland, The Netherlands

**NEW ZEALAND**  
Monsanto New Zealand Ltd.  
19 Great South Road  
Remuera  
Auckland 5, New Zealand

**NICARAGUA**  
Monsanto (Nicaragua) S.A.  
P. O. Box 288  
Managua, Nicaragua

**NORWAY**  
Monsanto Norge A.S.  
Fred Olsensteg 11  
Oslo 1, Norway

**PHILIPPINES**  
Monsanto Philippines Inc.  
Suite 1101 Security Bank & Trust  
8788 Ayala Ave.  
Makati Road D-700, Philippines

**PUERTO RICO**  
Monsanto Puerto Rico Company  
Munoz Rivera Ave. Barriguan St.  
Rio Piedras, Puerto Rico

**SINGAPORE**  
Monsanto Singapore Company (Pte.) Ltd.  
Suite 708 Cathay Bldg., 7th Floor  
Mount Sophia, Singapore 8

**SOUTH AFRICA**  
Monsanto South Africa (Pty.) Ltd.  
11th Floor, Sandton City Bldg.  
Sandton, Transvaal, South Africa

**SPAIN**  
Monsanto Iberica S.A.  
Lepanto 380-8  
Barcelona 13, Spain

**SWEDEN**  
Monsanto (Skandinavia) AB  
Kahlemorgatan 27  
Borås, Sweden

**SWITZERLAND**  
Monsanto (Suisse) S.A.  
Postbox  
CH 5600, Lanzburg, Switzerland

**TAIWAN**  
Monsanto Far East Ltd. (Taiwan Branch)  
36 Chang An East Road, 6th Floor  
Section 1, Taipei  
Taiwan


**THAILAND**  
Monsanto Thailand Ltd.  
6th Floor, Kasemkij Bldg.  
120 Siam Road  
Bangkok, Thailand

**UNITED KINGDOM**  
Monsanto Ltd.  
10-18 Victoria Street  
Monsanto House  
London SW1H 0NQ England

**VENEZUELA**  
Monsanto (Venezuela) CA  
Torre Phelps Pinar 24  
Plaza Venezuela  
Caracas 101, Venezuela

# Monsanto

Monsanto Industrial Chemicals Co. / A Unit of Monsanto Company / 800 N. Lindbergh Blvd., St. Louis, Mo. 63168

[illegible][illegible]

Each time a fluid is transferred there is chance some will be spilled. Therefore, some-what more fluids in the same drums you will use for cleaning to reduce the hazard.

**55-gallon drums:** Must be 18-gauge steel or heavier and have a 2-inch top.

**Engine driver:** Must be 24-gauge steel or heavier  
**Drawn steel must meet DOT 11.8 specifications**

**Big Hot Vibe** Old drums  
Rusted drums  
Overused drums  
Damaged drums  
Drums with wash walls  
or drums  
Open-top drums  
Light-Pete



Drums should be labeled "WASTE ASKAREL FLUIDS" and with the above "Safe Handling" statement at the bottom.



**Liquid Waste Only**  
Keep all solid materials out of drums used for  
liquids. Ashes and liquid spillage, waterborne liquids,  
rope, paper, cardboard, metal parts, floor sweeping  
debris, etc.) must be accumulated and dis-  
posed of separately. Contact your environmental



inclusion must not contain more than 1% water, or damage to the insulator can result.

Structure airspace: 55-gallon drums - 1% - 2 inches

possible fluid leakage in stem (A-B) due to  
pressure caused by fluid expansion.

Do not use damaged bump, rope, powder or wood, or other materials.

Beating the market is a goal that is never achieved.

**Use Proper Drum-Handling Equipment**  
Asphalt lined drums should be moved only with a proper drum-grabbing device. A patent built type of drum-grabbing device will reduce the possibility of damage to drums. A standard drum handling device of this type is the Lift-O-Matic<sup>®</sup>, manufactured by Marval Industries.



Although using drums should not be practiced, however, if proper drum-handling equipment is not available and action must be used:

- Be sure pillars are properly constructed and underpinned so rather than the chance of the drum falling from the point when being moved.
- Start-band all drums to their points.
- Drums should be landed together horizontally as well as vertically to the point.
- Be that four drums can be loaded across the width of a truck, prevent shifting in transit, multiple (2 or 4) drums per axle should be no more than 48 inches wide.



**H. Ashes-filled drums must be stored prior to return to Monrovia**

**Inspect Drums for Leak age**  
Inspect drums for leakage around seams and bung, making sure all seals are tight and leakproof.

Properly dispose of materials used to clean drums.



and where they will be protected from possible damage and inclement weather.



It drums must be stored in an exposed area, yards drums on three sides with both wings before the third level on the top where will not accumulate on the top of the drums. Otherwise, as drums "breathe", water can be drawn over the drum through the bung as shown by brown drums shown on the right.

Do not write around, between words or over lines of text.

**Following this procedure For EACH Summary up to 1000000:**

1. **Contact:** Customer Service Supervisor  
Attention: Mr. C. R. Field  
Mannings Company  
909 N. Lindbergh Boulevard  
St. Louis, Missouri 63166



- Number of items in the shipment
- Name and address of person to receive from bank
- Purchase order number, if a specific number is to be used
- Anything out of the ordinary about the filed or the shipment

- Letter of authorization with Memorandum identifying the bill for the shipment
- Pre-addressed shipment/returning labels for a drum
- Carrier's Advisory Note to be attached to the bill of lading
- Terms of shipment and charges, if any

2. Fill in EACH label with Manufacturer identification number, product description and YOUR company name and telephone number.

4. Put Monsanto identification number and your response number on Carrier's Advisory Note and attach to E1 of testing.

- Perform a final check for leakage damage, and to assure things are tightly sealed.



- If shipment is to be part of a mixed shipment, write full name of the person to whom the shipment is to be sent on the label. If the shipment is to be sent to a business, write the business name. If the shipment is to be sent to a person, write the person's name. If the shipment is to be sent to a person, write the person's name. If the shipment is to be sent to a person, write the person's name.
- Be certain driver is aware of Carrier's Agency Note and the phone numbers in case of breakdown or other problem.
- Do not ship any hazardous materials.

PLEASE NOTE: Manuscripts are not accepted for consideration without a cover letter.



# Monsanto