
January, 1972

11 5




PLICAST LWI-24G

Formula

5m Bat Grog	25%
8m L.W. Grog	31%
Perlite	4%
Lumnite Cement	40%
	100%

Ingredients

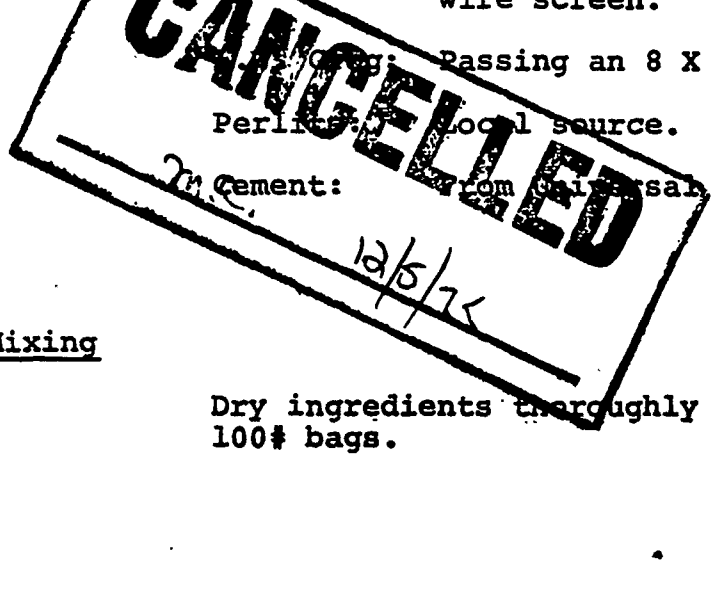

Bat Grog: Passing a 5 X 5 X 0.063" dia. wire screen and retained on a 50 X 50 X 0.010" dia. wire screen.

L.W. Grog: Passing an 8 X 8 X 0.063" dia. wire screen.

Perlite: Local source.

Cement: From Universal Atlas Co. in 94# bags.

Mixing

Dry ingredients thoroughly mixed and packed in 100# bags.