

MISCELLANEOUS ACCESSORIES AND COMPONENTS





Fuse Blocks

WHEN ORDERING SPECIFY

• Catalog number

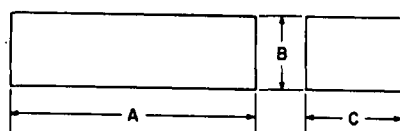
FUSE BLOCKS—(Types C, D, E and F—For Types A & B, see previous page)

Typical Illustration	Size of Base (Inches)	Poles	Main Fuse Clip Ratings		Fuse Clips Supplied		Catalog Number	① Price
			Amps.	Volts	Main Fuse Clips	Control Fuse Clips 30A-250V.		
TYPE C—30-60 AMP., 250 AND 600 V.								
	5 x 6½	3	②	②	---	---	10982-	
			30	250	X	---	H5-1	\$4.20
			30	600	X	---	H5-2	5.10
			60	250	X	---	H5-3	6.00
			60	600	X	---	H5-4	6.00
			60	600	X	---	H5-5	7.20
			②	②	---	X	H6-1	6.20
			30	250	X	X	H6-2	7.10
			30	600	X	X	H6-3	8.00
			60	250	X	X	H6-4	8.00
			60	600	X	X	H6-5	9.20
TYPE D—60-200 AMP., 250 V.—60-100 AMP., 600 V.								
	7½ x 10½	3	60	250	X	---	H7-1	12.00
			60	600	X	---	H7-2	13.80
			100	250	X	---	H7-3	15.00
			100	600	X	---	H7-4	22.50
			200	250	X	---	H7-5	22.50
			200	600	X	---	H7-6	30.00
			60	250	X	X	H8-1	14.00
			60	600	X	X	H8-2	15.80
			100	250	X	X	H8-3	17.00
			100	600	X	X	H8-4	24.50
			200	250	X	X	H8-5	24.50
			200	600	X	X	H8-6	32.00
			TYPE E—60-200 AMP., 250 V.—60-100 AMP., 600 V.					
	5¾ x 7½	3	60	250	X	---	H10-2	17.80
			60	600	X	---	H10-3	19.00
			100	250	X	---	H10-4	26.50
			100	600	X	---	H10-5	26.50
			200	250	X	---	H10-6	34.00
			200	600	X	---	H10-6	34.00
TYPE F—200 AMP., 250 AND 600 V.								
	(2) Blocks Each 7 x 2½	3	200	250/600	X	---	H9	33.00

① Fuses are not included in list price.

② Fuse clips for these blocks are available and may be selected from table of fuse clips.

APPROXIMATE DIMENSIONS



FUSE CLIPS FOR TYPE B, C AND D FUSE BLOCKS

Fuse Clip Rating		④ Catalog Number			Price
Amps.	Volts	For Use With Fuse Blocks—10982H-			
		2-1, 3-1, 4-1,	5-1—6-1	7-1—8-1	
		10982-	10982-	10982-	
30	250	H11-1	H12-1	---	\$.30
30	600	H11-2	H12-2	---	.60
60	250	H11-2	H12-2	H13-1	.60
60	600	H11-3	H12-3	H13-2	1.00
100	250	---	---	H13-3	3.50
100	600	---	---	H13-3	3.50
200	250	---	---	H13-4	6.00

APPROXIMATE DIMENSIONS

Ratings		Type A—1 Pole			Type B—1, 2 and 3 Pole			Type C—3 Pole			Type D—3 Pole			Type E—3 Pole			Type F—3 Pole		
		Dimensions in Inches																	
Amps.	Volts	Wide A	High B	Deep C	Wide A	High B	Deep C	Wide A	High B	Deep C	Wide A	High B	Deep C	Wide A	High B	Deep C	Wide A	High B	Deep C
30	250	2½	2½	1½	5	1¾	2¾	5½	6½	2½	---	---	---	---	---	---	---	---	---
30	600	---	---	---	5	1¾	2½	5½	6½	2½	---	---	---	---	---	---	---	---	---
60	250	---	---	---	5	1½	2½	5½	6½	2½	10½	7½	2½	8	5½	5	---	---	---
60	600	---	---	---	5¾	1½	3	5½	6½	2½	10½	7½	3	8	5½	5½	---	---	---
100	250	---	---	---	---	---	---	---	---	---	10½	7½	3½	8	5½	5½	---	---	---
100	600	---	---	---	---	---	---	---	---	---	10½	7½	3½	8	5½	5½	---	---	---
200	250-600	---	---	---	---	---	---	---	---	---	10½	7½	3½	8	5½	5½	9½	7	3¾

③ Single pole fuse blocks only. For two pole devices add approximately 1/2". A three pole device consists of (1) single pole and (1) two pole fuse block.

④ Kit contains 2 clips and mounting material for one fuse.

DISCOUNT SCHEDULE 1 CD

CUTLER-HAMMER