


FILE NAME: Owens Illinois (OWILL)

DATE: 1956

DOC#: OWILL033

DOCUMENT DESCRIPTION: Industry Sales Literature

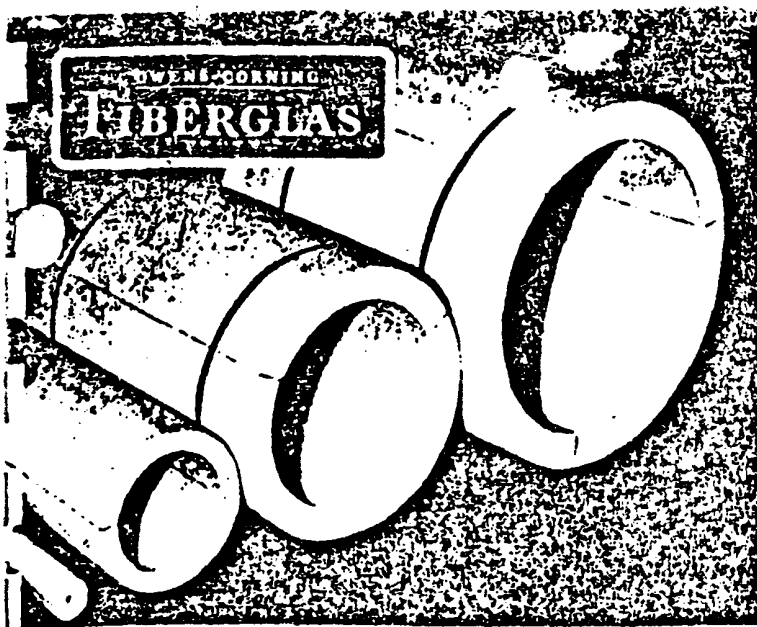

pricing to 1200°F.

EXHIBIT
B

PLAINTIFF'S
EXHIBIT

189

IN1.C5

October, 1956

*high temperature insulation
for indoor and outdoor piping
up to 1200°F.
operating temperature*

Kaylo pipe insulation

Kaylo® Pipe Insulation, a white, rigid hydrous calcium silicate heat insulation, manufactured by Owens-Illinois Glass Company and distributed nationally by Owens-Corning Fiberglas Corporation, effectively insulates indoor and outdoor piping up to 1200°F.

This thoroughly tested and field-proven material contains the physical properties most desired for efficient, durable insulation work. Kaylo Pipe Insulation's thermal effectiveness, high strength and moisture resistance are unattained by most other insulating materials.

A chemically reacted material, Kaylo Pipe Insulation contains no added binder. For mechanical effects, a small amount of asbestos fiber is included at the time of manufacture.

jackets

canvas—Kaylo Sectional Pipe Insulation includes standard canvas jackets, at no additional charge, on thicknesses up to and including 2½". Standard canvas is available on segmental forms at a slight additional cost. Bands are available for use with this product at slight additional charge and will be furnished on request.

6 oz. and 8 oz. canvas jackets are available for all types, sizes and thicknesses of Kaylo Pipe and Tube Insulation at an additional charge. These jackets are factory applied on Sectional Pipe and Tube Insulation. On Multi-segmental forms, they are furnished but not adhered.

sizes

thickness Kaylo Pipe Insulation is available in thicknesses from 1" to 3" depending upon pipe size. Kaylo Tube Insulation is available in thicknesses of 1" and 1½".

pipe sizes—Kaylo Pipe Insulation is available to fit pipe from ½" to 39" in diameter. Kaylo Tube Insulation will fit copper tubing from ½" to 3½" in diameter.

forms—Kaylo Pipe Insulation is available in sectional or multisegmental form depending upon pipe size. All insulation is furnished in 3' sections.

©T. M. Owens-Illinois Glass Co.

offers...

high efficiency—Among the most efficient insulations for temperatures up to 1200°F. Low "k" results from extremely small and numerous insulating air spaces.

simplified dimensional standards Sizes are designed to permit nesting of one size over another to produce greater thicknesses than available in single layer or to produce "broken joint" concept.

water resistance Kaylo Pipe Insulation retains an appreciable percentage of its strength even after complete saturation in water. After a cycle of soaking and drying, it returns to its original thermal efficiency and strength with no shrinkage or warping.

high strength—High flexural strength, compressive strength and resistance to abrasion far above normal requirements for heat insulation, greatly reduce installation and service breakage.

easy fabrication Ordinary tools of the trade sufficient for all cutting, sawing or scoring. Non-irritating to the skin and non-toxic. Offers pleasant handling characteristics.

long life—Remains strong and efficient over the years. Dimensionally stable with little shrinkage. Has superior life characteristics over other types of high temperature insulations.

versatility—Performs efficiently at temperatures through the hot water and low pressure steam range in addition to temperatures in the superheated steam range. One high temperature material to do the job usually requiring combinations of two different insulating materials.

limitations

Kaylo Pipe Insulation is designed for temperatures up to 1200°F. and is not recommended when operating temperatures of piping exceed this limit.