


No. 87C

EFFECTIVE JANUARY 22, 1968
SUBJECT TO CHANGE WITHOUT NOTICE

Suggested
RETAIL
PRICE LIST

Glidden Paints
SPRED PRODUCTS

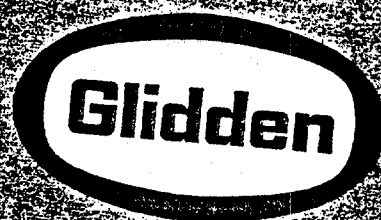

THE GLIDDEN COMPANY, NATIONAL HEADQUARTERS, CLEVELAND, OHIO 44116

Glidden

REGISTERED RETAIL PRICE LIST No. **870**

***AD-EL-ITE PAINT AND VARNISH REMOVER Y-70**

A top-quality remover. Contains no alkalis, acids, oils, or water. Does not raise the grain or discolor the wood. Evaporates very slowly. Very effective in removing old paint, enamel, lacquer and baked japan

Gals.	Qts.	Pts.	½ Pts.
3.53	1.34	.83	.63

***ALKALI-RESISTING PRIMER Y-5041**

An easy to apply masonry primer-sealer for interior plastered or damp walls, and exterior masonry, brick, stucco and concrete blocks, which are to be painted with synthetic rubber-base or oil base paints. Penetrates deeply into the pores and adheres firmly to the surface to create perfect bond for finish coat. Resists moisture and alkali. Seals in active lime. Prevents fresh plaster from burning through and discoloring the finish coat

8.78 2.67

APPLICATION—Brush, Spray THINNER—Turpentine
DRYING TIME—16 hours Covers 350-400 Sq. Ft. per gal.
(Also See SPRED Primer-Sealer Alkali-Resisting Primer)

ALKYD ENAMELS

See: Brush-Day-Lite Alkyd Flat and Tint White; Japalac; Flor-enamel; Rustmaster; Ripolin; Spred Lustre.

***ALUMINUM ASPHALT ROOF PAINT Y-605**

Recommended for tar paper, composition and asphalt roofs. Will rejuvenate weathered roofs and insulate with a silvery sheet of aluminum in one coat. Made with selected asphalts, finest grade aluminum flakes and solvents

6.23

APPLICATION—Brush, Spray THINNER—Mineral Spirits or Turp.
DRYING TIME—10 hours Covers 275-400 Sq. Ft. per gal.,
depending on surface.

ALUMINUM PAINTS

See: Metallite; Japalac Spray Enamel

ASBESTOS SHINGLE PAINT

See: SPRED House Paint; SPRED Glide-On

BARN PAINT

See: Endurance Barn Paint

BASECOATS (Primers)

For Exteriors—See SPRED House Paint Primecoat #1; Rustmaster Metal Primer; Rustmaster Galvanized Primer, Endurance House Paint

For Interiors—See: Gliddencoat; Speed-Wall Interior Basecoat; SPRED Primer-Sealer; Ripolin Undercoat, Alkali-Resisting Primer.

BASEMENT PAINTS

For Floors—See: Florenamel (Alkyd-Polyurethane)

For Walls—See: SPRED SATIN; SPRED Glide-On

*AVAILABLE IN 5-GAL. CANS
AT 15c PER GALLON LESS THAN 1-GAL. PRICES.

PA

GL

**BLOCKAID Y-1971**

An all purpose, water resistant material for masonry filling, sealing, patching and coating—stops water seepage. Can be tinted with Dramatone colors

BLACKBOARD FINISHES

See: Japalac 1208

BLENDING COLORS

See: SPRED Dramatone Tinting Colors; Colors-In-Oil

BRICK PAINTS

See: SPRED House Paint; SPRED Glide-On

(50 # Bag)

11.49

(12½ # Bag)

3.49

BRUSH-DAY-LITE ALKYD FLAT ENAMEL Y-5700 line

Beautiful, completely washable, flat alkyd enamel for interior wall surfaces, including plaster, wood, concrete, wallboard and metal. Can be applied quickly with a wide brush or roller. Flows out smoothly. One coat is usually sufficient. Colors match SPRED SATIN.

White and Colors

APPLICATION—Brush, Roller, Spray

DRYING TIME—4 hrs; overnight for recoating

THINNER—Mineral Spirits or Turpentine

COVERAGE—Up to 550 Sq. Ft. per gal.

§BRUSH-DAY-LITE ALKYD FLAT EN. PASTEL TINT BASE Y5718

(124 oz.) (31 oz.)

5.72

1.88

§BRUSH-DAY-LITE ALKYD FLAT EN. INT. TINT BASE Y5787

(122 oz.) (30.5 oz.)

5.58

1.81

§BRUSH-DAY-LITE ALKYD FLAT ENAMEL TINT WHITE Y5780

(120 oz.) (30 oz.)

5.48

1.78

5.38

1.74

For tinting Brush-Day-Lite Alkyd Flat Enamel Colors

CEMENT AND STUCCO PAINT

See: SPRED House Paint; SPRED Glide-On

COLORS-IN-OIL Y-1700 line

Unexcelled for tinting flat wall paints. Semi-Gloss and Gloss enamels, glazing liquids, white lead and white paste paint. Ground extremely fine in special pale linseed oil for quick positive dispersion. The finest pigments are used to develop perfect tone and strength of color. Not to be used in latex, emulsion paints, or lacquer.

Raw Umber, Burnt Umber, Y1708, Y1703

Raw Sienna, Burnt Sienna, Y1719, Y1702

Ivory Drop Black, Y1709

Lamp Black, Y1720

Prussian Blue, Y1711

Chrome Green, Light; Chrome Green, Medium, Y1706, Y1705

Perma-Green, Y1745

Chrome Yellow, Light and Medium, Y1716, Y1707

Chrome Yellow, Dark, Y1742

Yellow Ochre, Y1701

Venetian Red, Y1718

American Vermilion (Interior Use Only) Y1717

Perma Blue, Y1746

Gals.

Qts.

½ Pts.

1" x 5"
Tubes

8.43

2.52

.91

.52

9.23

2.72

.96

.52

2.57

.94

.52

7.08

2.18

.87

.52

3.12

.99

.52

12.53

3.54

1.22

.52

5.52

1.77

.52

5.12

1.54

.52

5.37

1.66

.52

9.23

2.72

.96

.52

8.33

2.50

.94

.52

4.87

1.50

.52

5.17

1.56

.52

CONCRETE PAINT

See: SPRED House Paint; SPRED Glide-On

CRACK AND CREVICE FILLER

See: SPRED Patch

CREOSOTE PAINT

See: Stock Farm Paint

§SHORT FILLED TO ALLOW ADDITION OF COLORANT.

***CRAFTSMAN LATEX PAINT Y-3050 line**

A specially formulated ready-to-use interior latex paint for application by brush or roller for plaster, wallboard, acoustical tile, masonry and wallpaper.

***CRAFTSMAN GLOSS ENAMEL WHITE Y-6500**

A quality gloss enamel recommended for interior use on woodwork, furniture, kitchen and bathroom walls and cabinets.

***CRAFTSMAN SEMI-GLOSS ENAMEL WHITE AND COLORS Y-6650 line**

A self-priming semi-gloss enamel in white and in colors matching Craftsman Latex Colors. Recommended for interior use on woodwork, furniture, kitchen and bathroom walls and cabinets.

***CRAFTSMAN MILDEW RESISTANT WHITE HOUSE PAINT Y-2217**

A house paint with unusual brushing qualities and elasticity making it ideal for all exterior painting on wood, asbestos siding and metal. New self-cleaning properties make its brightness last. Helps protect surface from mildew.

***CRAFTSMAN HOUSE PAINT WHITE Y-2218**

An oil base exterior paint with easy brushing qualities making it perform well on wood, brick, stucco, concrete and metal.

***CRAFTSMAN NON-CHALK WHITE Y-2240**

An excellent bright white house paint. Recommended for areas adjacent to masonry or darkly painted areas as it eliminates streaks caused by weathering. May be tinted with Dramatone.

DECK PAINT

See: Florenamel (Alkyd-Polyurethane)

DEEP COLORS

See: SPRED SATIN; SPRED SATIN Dramatone Tint Base; SPRED LUSTRE Dramatone Tint Base

See: INT. TINT BASE LUSTRE, SATIN, BDL ALKYD FLAT, JAPALAC

DRAMATONE MULTI-PURPOSE TINTING COLORS

See: SPRED Products Section

***DRIWAL (Silicone) Y-534**

A transparent, water-repellent finish for exterior, above-ground brick, stone and masonry. Does the job in ONE COAT. Keeps rain water from penetrating the pores. Resists efflorescence and staining. Masonry surfaces show no visible change in color or texture when treated with this material. Recommended for use on brick and mortar, concrete, cement-base paints, asbestos-cement combinations, sandstone, stucco and stones other than limestone. Not to be used on cinder block or other light weight aggregate concrete blocks with extremely porous surfaces. This invisible water-repellent coating contains silicone to combat masonry deterioration. Not recommended for limestone surfaces

APPLICATION—Brush, Spray

DRYING TIME—2 hours

THINNER—None required

COVERAGE—125 to 275 Sq. Ft. per gallon depending on porosity of surface

*AVAILABLE IN 5-GAL. CANS

AT 15¢ PER GALLON LESS THAN 1-GAL. PRICES.

5.08



Gals.	Qts.	Pts.	1/2 Pts.
-------	------	------	----------

ENAMELS

See: Japalac; Ripolin; Brush-Day-Lite Alkyd Flat; Florenamel;
SPRED Lustre; Rustmaster; Craftsman

ENAMEL UNDERCOATER

See: Gliddencat; Ripolin Undercoat; Interior Basecoat

***ENDURANCE BARN PAINT - Red Y-500**

A new, highest quality paint with excellent hiding power. It dries to a tough glossy film that withstands the rigors of the roughest weather. Provides long-lasting protection for barns, sheds, granaries, silos, water tank exteriors, store-houses, fences, etc. Use it on exterior wood and metal

5.48	1.80	---	---
------	------	-----	-----

APPLICATION—Brush, Spray

DRYING TIME—Overnight; 36 hours for recoating

THINNER—Mineral Spirits or Turpentine

COVERAGE—500 Sq. Ft. per gallon

***ENDURANCE EXTERIOR BASECOAT Y-1851**

Exterior primer for new wood and previously painted wood that is badly weathered or chalked. Use it to spot-prime bare spots resulting from peeling and flaking. Made from specially prepared oils to produce the elasticity, adhesion and control penetration necessary for finest exterior paint jobs

APPLICATION—Brush, Spray

DRYING TIME—48 hours for recoating

THINNER—Mineral Spirits or Turpentine

COVERAGE—450 to 500 Sq. Ft. per gallon

ENDURANCE HOUSE PAINT Y-1800 LINE*For Siding, Trim and Shutters**

Contains more heavy-bodied, pure linseed oil per gallon for longer life; pure white lead for added strength, water-resistance and extra durability; titanium for whiteness and hiding; zinc oxide to combat mildew, magnesium silicate for protection against cracking and checking. The exclusive Glidden formula makes this the finest, longest-lasting, self-cleaning exterior house paint manufactured. May be tinted with DRAMATONE Tinting Colors.

Outside White, Y1800

Regular Colors and Black, Y1800 Line

Non-Chalking Trim White, Y1892

Crylite Green, Y1828

§Pastel Tint Base 1818 (124 oz.) (31 oz.)

§Intermediate Tint Base 1877 (122 oz.) (30.5 oz.)

§Deep Tint Base 1880 (120 oz.) (30 oz.)

For Tinting Special Colors

Shutter Green, Y1861

Dark Walnut; Dark Blue, Y1872, Y1871

9.12	2.77	1.56	---
7.82	2.42	1.42	---

APPLICATION—Brush, Spray, Roller

DRYING TIME—16 hours; recoat in 72 hours

THINNER—Mineral Spirits or Turpentine

COVERAGE—550 Sq. Ft. per gallon

*AVAILABLE IN 5-GAL. CANS
AT 15¢ PER GALLON LESS THAN 1-GAL. PRICES.

§SHORT FILLED TO ALLOW ADDITION OF COLORANT.

***ENDURANCE IMPERIAL ONE-COAT Y-1867****White House Paint (Alkyd Fortified)**

Premium quality self-cleaning white exterior paint. Gives extra hiding and coverage with its built-in second coat. Has depth and richness of enamel. Easy brushing. Once over is enough with this amazing one-coat paint! Fortified with alkyds to give extra durability and lasting beauty

APPLICATION—Brush, Spray

THINNER—Mineral Spirits or Turpentine

DRYING TIME—48 hours

COVERAGE—550 Sq. Ft. per gallon

Gals.

Qts.

Pts.

½ Pts.

9.31

2.79

***ENDURANCE VELVET (Flat Exterior Finish) Y-2700 line**

FOR WOOD SHINGLES, SHAKES, WOOD SIDING AND TRIM. May be used also on metal surfaces. It brushes easily and will produce a beautiful flat finish in one coat over most previously painted surfaces if the color contrast is not great. Dries dust free in one hour. It provides a "breather type" film which aids the elimination of internal moisture.

White and Colors

APPLICATION—Brush, Spray

DRYING TIME—Dust-free 1 hr.; 48 hours for recoating

THINNER—Mineral Spirits or Turpentine

COVERAGE—Up to 550 Sq. Ft. per gallon

7.28

2.26

***EVERON HOUSE PAINT (White) Y-2200**

An excellent paint that stays clean and bright because of its special formula which provides controlled chalking. A superior finish for all wood surfaces exposed to weather and changing climatic conditions. Resists fumes in industrial areas! EVERON HOUSE PAINT brushes easily, penetrates deeply when used as a primer, adheres tenaciously as a finish coat, dries with an elastic, high gloss finish that remains firm and durable. EVERON is truly the economical HOUSE PAINT

APPLICATION—Brush, Roller, Spray

DRYING TIME—16 hours; recoat in 48 hours

THINNER—Mineral Spirits or Turpentine

COVERAGE—550 Sq. Ft. per gallon

FARM BUILDING PAINTS

For Exteriors—See: Endurance Paints; Metallite; SPRED House Paint; SPRED Glide-On; Stock Farm White

For Interiors—See: SPRED Products

FENCE PAINTS

See: Stock Farm White; Metallite; Rustmaster

FILLER, WOOD

See: Glid-Tone Wood Filler

FLOOR FINISHES

See: Florenamel; Glid-Tone Gloss Varnish; Xpert Clear Gloss

*AVAILABLE IN 5-GAL CANS
AT 15¢ PER GALLON LESS THAN 1-GAL. PRICES.

Gals.	Qts.	Pts.	½ Pts.
-------	------	------	--------

*FLORENAMEL (Alkyd) Y-850 line

An alkyd enamel with extra durability, for use on porches, floors of wood and concrete, canvas decks, railings — inside and outside. Will not waterspot; standing pools of water do not affect it. FLORENAMEL gives concrete basement floors and walls a mirror-like enamel finish. It's scrubbable. FLORENAMEL is made to take the roughest wear and weather. May be tinted with DRAMATONE Tinting Colors. All colors

7.73	2.47	---	---
------	------	-----	-----

APPLICATION—Brush, Spray

DRYING TIME—12 hours

THINNER—Turpentine or Mineral Spirits

COVERAGE—500 to 600 Sq. Ft. per gallon

*FLORENAMEL (Polyurethane) Y-890 line

Ready Mixed Colors

A high quality enamel for interior and exterior floors of wood, metal and concrete.

§Tinting White 818 (124 oz.) (31 oz.)

8.23	2.57	---	---
------	------	-----	-----

§Deep Tint Base 880 (120 oz.) (30 oz.)

7.93	2.40	---	---
------	------	-----	-----

§Intermediate Tint Base 887 (122 oz.) (30.5 oz.)
For Tinting Special Colors

7.53	2.30	---	---
------	------	-----	-----

7.73	2.35	---	---
------	------	-----	-----

APPLICATION—Brush, Roller

DRYING TIME—Four-six hours to touch, twenty-four hours for recoat

THINNER—Mineral Spirits

COVERAGE—Up to 600 Sq. Ft. per gallon

*GLIDDENCOAT (White Enamel Undercoat) Y-555

A perfect enamel undercoat for woodwork. Produces a firm opaque film to hold out succeeding coats of finishing enamel, making it possible to secure full luster and depth of gloss. Works easily, flows evenly without showing brush marks and requires only light sanding. Can be tinted with Colors-In-Oil or DRAMATONE Tinting Colors

6.73	2.14	1.25	.84
------	------	------	-----

APPLICATION—Brush, Spray

DRYING TIME—Overnight for sanding and recoating

THINNER—Mineral Spirits or Turpentine

COVERAGE—500 Sq. Ft. per gallon

GLIDE-ON, SPRED

See: SPRED Products Section

GLID STRIP (Non-Flammable) Y-74

Wash Away Paint and Varnish Remover

A non-flammable, water-flush paint and varnish remover that stays wet longer and permits working on longer areas. Has less tendency to run and sag on upright surfaces due to its heavy body. Easy to use. Just brush it on, wait a few minutes, then wash it off with water. GLID STRIP also acts as a cleaner for old, hardened nylon and pure bristle paint and varnish brushes. Will soften latex paints for easy removal

7.08	2.36	1.29	.83
------	------	------	-----

*AVAILABLE IN 5-GAL CANS

AT 15c PER GALLON LESS THAN 1-GAL. PRICES.

§SHORT FILLED TO ALLOW ADDITION OF COLORANT.

**GLID-TONE GLOSS VARNISH Y-1**

A deluxe, general-purpose interior varnish. Epoxy resins give it extreme abrasion resistance, durability and lasting beauty. Excellent on all interior wood surfaces, bar and tabletops, woodwork, furniture and floors. Especially suitable over newly stained woodwork where Glid-Tone Stains have been applied. May be rubbed —

APPLICATION—Brush

DRYING TIME—6 to 8 hours

THINNER—Mineral Spirits or Turpentine

COVERAGE—650 Sq. Ft. per gallon

Gals.	Qts.	Pts.	½ Pts.
-------	------	------	--------

9.18	2.74	1.52	.95
------	------	------	-----

***GLID-TONE REDWOOD STAIN Y-31**

A penetrating flat Redwood Stain and Sealer designed especially to protect and beautify natural exterior wood such as siding, shingles, shakes, panels, doors, fences, picnic tables and yard furniture. If gloss finish is desired use Clear Redwood Finish Y30

APPLICATION—Brush, Spray

DRYING TIME—Overnight

THINNER—Mineral Spirits, Turpentine, VM & P Naphtha

COVERAGE—First Coat on rough, new wood: 200-300 Sq. Ft. per gallon. Finished Wood: 300-400 Sq. Ft. per gallon, first coat. 2nd Coat: Up to 600 Sq. Ft. per gallon. 3rd Coat: Up to 800 Sq. Ft. per gallon.

5.68	1.84	---	---
------	------	-----	-----

GLID-TONE REDWOOD FINISH*Clear Polyurethane Y-30**

A brilliant gloss finish for redwood, red cedar, pine and other exterior wood surfaces. Mildew and fume resistant. Provides a tough, erosion resistant film that maintains flexibility and resists checking, cracking, hardening

APPLICATION—Brush, Spray

DRYING TIME—Overnight

THINNER—Mineral Spirits, Turpentine, VM & P Naphtha

COVERAGE—First Coat on rough, new wood: 200-300 Sq. Ft. per gallon. Finished Wood: 300 to 400 Sq. Ft. Second coat: 500 to 600 Sq. Ft. Third coat: 600 to 800.

8.43	2.52	---	---
------	------	-----	-----

GLID-TONE RE-GRAIN GROUND COAT Y-260

An enamel undercoater that produces a firm, opaque film, renews worn out finishes as described in "Step 1" in the Glid-Tone Re-Grain Process folder. For more detailed information see Glid-Tone Regrain Process Folder

---	2.37	1.27	.86
-----	------	------	-----

GLID-TONE SATIN-SHEEN VARNISH Y-47

A new satin sheen varnish that dries free from all cloudiness and preserves the natural beauty of the wood. Excellent for use over GLID-TONE stains and for all interior work where a dull finish or rubbed effect is desired. Sufficiently pale for use over light modern stains. DO NOT USE ON FLOORS

APPLICATION—Brush

DRYING TIME—2 hours

THINNER—Mineral Spirits or Turpentine

COVERAGE—650 Sq. Ft. per gallon

7.93	2.38	1.37	.89
------	------	------	-----

*AVAILABLE IN 5-GAL. CANS
AT 15¢ PER GALLON LESS THAN 1-GAL. PRICES.

**GLID-TONE SPAR VARNISH Y-48**

Extra durable spar varnish for exterior surfaces exposed to weather. Recommended as the finest varnish available for exterior use—spars, hulls, decks, house sidings, paneling, porch ceilings, outdoor furniture, etc. Makes perfect finish over Glid-Tone Stain on exterior surfaces

Gals.	Qts.	Pts.	½ Pts.
9.68	2.82	1.59	1.02

APPLICATION—Brush

DRYING TIME—8 hours; 48 hours for recoating

THINNER—Mineral Spirits or Turpentine

COVERAGE—650 Sq. Ft. per gallon

GLID-TONE VARNISH STAIN Y-1201-02-03

Stains and varnishes in one operation. Dries quickly, to a high lustre. For use on furniture, woodwork and floors. Unusually waterproof

7.63	2.37	1.35	.89
------	------	------	-----

APPLICATION—Brush, Spray

DRYING TIME—4 to 6 hours; 24 hours for recoating

THINNER—Mineral Spirits or Turpentine

COVERAGE—600 Sq. Ft. per gallon

GLID-TONE WOOD STAIN Y-242 line

An all-purpose, pigmented wiping stain for all types of wood, plywood and veneer, exterior and interior surfaces. Especially suitable for knotty pine wood paneling in recreation rooms. Excellent for use on new or old furniture, woodwork, cabinets, wall paneling and floors. GLID-TONE Stain heightens the beauty of the wood grain. Holds color evenly. May be coated with varnish, shellac or lacquer. May be tinted with DRAMATONE Tinting Colors to produce additional beautiful colors.

APPLICATION—Wiping Cloth, Brush

DRYING TIME—12 hours Stains, All Colors

THINNER—Glid-Tone Stain Reducer

6.03	1.97	1.18	.79
------	------	------	-----

GLID-TONE STAIN REDUCER Y-251

3.98	1.40	.87	.67
------	------	-----	-----

SPRED SATIN

AND SPRED RELATED PRODUCTS



SUGGESTED RETAIL PRICE LIST No. 870

SPRED SATIN Y-3400 line (100% Latex Interior Paint)

Original 100% latex base paint for interior walls, ceilings, woodwork. Excellent for masonry, interior plaster, porous wallboards, acoustical tile, wallpaper. The ideal latex paint for schools, hospitals, residences, offices, motels, hotels, apartments, housing projects, etc. Extremely fast, easy application; self priming, cuts painting time in half. No disagreeable odor. Guaranteed washable. May be tinted with DRAMATONE Tinting Colors.

	Gals.	Qts.	Pts.	1/2 Pts.
3400 High Hiding White	6.99	2.23		
3470 Ceiling Flat White and Standard Colors	6.99	2.23		
§3418 Decorator Tinting White (Pastel Tint Base) (124 oz.) (31 oz.)	6.75	2.07		
§3480 Deep Tint Base (120 oz.) (30 oz.)	6.30	1.98		
§3487 Intermediate Tint Base (122 oz.) (30.5 oz.)	6.35	2.00		
For Tinting Special Colors				

DEEP COLORS

3434 Charcoal Black	6.99	2.23		
3482 Beaver Brown	6.99	2.23		
3484 Cherry Red	8.95	2.58		

APPLICATION—Brush, Roller, Spray

DRYING TIME—20 minutes; may be recoated in 4 hours

THINNER—Water

COVERAGE—Up to 500 Sq. Ft. per gallon over most surfaces

*SPRED LUSTRE SEMI-GLOSS ENAMEL Y-4600 line (Interior-Exterior Washable Alkyd Enamel)

Ready to use. Covers most surfaces in One Coat. Requires no other primer on new plaster or new wood. Ideal for kitchens, bathrooms, hallways—walls, furniture, plaster, woodwork and metal. Washes like tile. Colors match SPRED SATIN. May be tinted with DRAMATONE Tinting Colors.

4600 Super White	8.58	2.62	1.49	
4600 Line Ready-Mixed Colors	8.48	2.57		
§4618 Pastel Tinting White (124 oz.) (31 oz.)	8.33	2.52		
§4680 Deep Tint Base (120 oz.) (30 oz.)	7.68	2.27		
§4687 Intermediate Tint Base (122 oz.) (30.5 oz.)	7.98	2.40		
For Tinting Special Colors				

DEEP COLORS

4634 Charcoal Black	8.48	2.57	1.47	
4682 Beaver Brown	8.48	2.57	1.47	
4684 Cherry Red	10.98	3.07	1.64	

APPLICATION—Brush, Roller, Spray

DRYING TIME—Dust free 3 to 4 hours; recoat overnight

THINNER—Mineral Spirits or Turpentine

COVERAGE—Approx. 550 Sq. Ft. per gallon

*AVAILABLE IN 5-GAL. CANS

AT 15c PER GALLON LESS THAN 1-GAL. PRICES.

§SHORT FILLED TO ALLOW ADDITION OF COLORANT.

**DRAMATONE MULTI-PURPOSE
TINTING COLORS Y-1750 line****(For Tinting Latex, Alkyd and Other Paints)**

Tinting colors for use with SPRED SATIN Latex Paint, Alkyd Semi-Gloss Enamel, Alkyd Flat Enamel and Other Paints. See Dramatone displays for wide range of colors

1750 (N-T) Neutral Toner; 1751 (F-R) Fast Red; 1752 (Y-OX) Yellow Oxide; 1753 (L-Y) Lemon Yellow; 1754 (YE-G) Yellow Green; 1755 (T-GR) Thalo Green; 1756 (T-BL) Thalo Blue; 1757 (V10) Violet; 1758 (R-O) Rich Orange; 1782 (BLK) Black; 1786 (OX-R) Oxide Red.

Gals.	Qts.	Pts.	1/2 Pts.
-------	------	------	----------

1 Oz. Per Tube	Qt.
-------------------	-----

.71	
-----	--

***SPRED HOUSE PAINT Y-3600 line
(100% Latex Exterior Paint)**

A new blister-resistant house paint for exterior wood and masonry. May be applied without primer over sound previously painted surfaces which are in good condition. Has a remarkable fast drying time of thirty minutes, which practically eliminates damage from bugs, rain and dust. May be applied over damp surfaces. Has long lasting velvet-like sheen. Once the Spred House Paint system is used on a house, future paintings will require only one coat.

White and Colors

8.10	2.47
------	------

§Spred House Paint White Tint Base Y-3625 (124 oz.) (31 oz.)
For Tinting Special Colors

7.85	2.34
------	------

APPLICATION—Brush, Roller, Spray Gun

DRYING TIME—4 hours for recoating

THINNER—Water

COVERAGE—Approx. 450 Sq. Ft. per gal. on smooth surface

***SPRED PRIMECOAT #1 Y-3651
(Thin With Mineral Spirits)**

Spred Primecoat #1 provides a firm foundation on new or unpainted exterior surfaces. The ideal undercoat that creates the finest possible two coat paint job when used under Spred House Paint. Excellent also for recoating badly weathered or porous surfaces that have been previously painted. This primecoat has been especially formulated for Spred House Paint

8.10	2.47
------	------

APPLICATION—Brush, Roller, Spray Gun

DRYING TIME—48 hours

THINNER—Turpentine or Mineral Spirits

COVERAGE—450-550 Sq. Ft. per gallon

***SPRED GLIDE-ON Y-3500 line
(Vinyl-Latex Exterior Masonry Paint)**

An exterior vinyl-latex masonry paint, unaffected by the alkalinity found in all masonry surfaces. Designed for use on stucco, concrete, brick, concrete block, cinder block, asbestos shingle and panel siding, unglazed tile and primed metal. Keeps out moisture yet the surface "breathes" to let vapor escape from inside. A tough vinyl film that resists driving rains, hottest sunshine, mildew, snow and ice, sea air and salt water spray, strongest smog, dust and chemical fumes. Resists cracking, peeling, fading, blistering, acid and alkali action.

White and Colors

7.13	2.22
------	------

§3518 Pastel Tint Base (124 oz.) (31 oz.)

6.98	2.16
------	------

§3580 Deep Tint Base (120 oz.) (30 oz.)

6.18	1.96
------	------

§3587 Intermediate Tint Base (122 oz.) (30.5 oz.)

6.58	2.06
------	------

For Tinting Special Colors

APPLICATION—Brush, Roller, Spray

DRYING TIME—Overnight for recoating

THINNER—Water

COVERAGE—Up to 400 Sq. Ft. per gallon

*AVAILABLE IN 5-GAL. CANS

AT 15c PER GALLON LESS THAN 1-GAL. PRICES.

§SHORT FILLED TO ALLOW ADDITION OF COLORANT.



Gals.	Qts.	Pts.	1/2 Pts.
-------	------	------	----------

SPRED PRIMER-SEALER Y-3416*(A Latex Vapor-Barrier)**

An excellent latex primer for porous surfaces of dry-wall construction, plaster, masonry and asbestos covered pipes. Seals high-suction plaster, most water stains, "hot spots" and discolored surfaces. Assures positive sealing and holdout for succeeding finishing coats of either latex or oil base paints. May be intermixed with latex paints for color, or tinted with DRAMATONE Tinting Colors. An approved vapor barrier which helps to prevent outside paint failures

6.08	1.97		
------	------	--	--

APPLICATION—Brush, Roller, Spray

THINNER—Water

DRYING TIME—20 minutes; may be recoated in 4 hours

COVERAGE—Up to 400 Sq. Ft. per gallon on plaster;

100 Sq. Ft. per gallon on porous wallboard

SURFACE BOND Y-55*(Seals Powdery Masonry Surfaces)**

A high quality, clear finish bonding coat. Designed to penetrate deeply into chalky surfaces left by previous coats of cement bondings or powder type paints on masonry surfaces. Dries hard to help prevent further chalking. Anchors old surface to make a perfect bond for SPRED GLIDE-ON, as well as other exterior and interior masonry paints

6.83	2.12		
------	------	--	--

APPLICATION—Brush, Spray

DRYING TIME—1 to 4 days depending upon drying conditions

THINNER—Turpentine or Mineral Spirits

COVERAGE—300 to 400 Sq. Ft. per gallon

***SPRED STIPPLE-TEXTURE AND
BLOCK FILLER Y-3090****(Silicated Latex For Masonry and Dry-Wall Construction)**

Ready to use on new or old surfaces. Gives all the advantages of texture and all the beauty of paint in one application. Hides irregular surfaces on plaster, wall-board, masonry blocks and wallpaper, seals spackled nail heads and tape joints. Easily applied with brush or roller. May be stippled or lightly textured in a variety of patterns and techniques. Especially made for texturing and stippling and for filling masonry blocks, pores and voids, to eliminate "pinholing" in finish coat, to assure better water repellency and to develop excellent appearance on interior and exterior masonry. May be tinted with DRAMATONE Tinting Colors.

White

5.32	1.81		
------	------	--	--

APPLICATION—Brush for texturing, followed by stipple brush, sponge, trowel, whisk broom, comb, etc., as desired. Use roller for stipple effect. Brush, roll or spray when used as a block filler.

DRYING TIME—Overnight

THINNER—Water

COVERAGE—Texturing and filling blocks—75 to 10 Sq. Ft. per gallon. Stippling: 175 to 200 Sq. Ft. per gallon

SPRED SURFACENE Y-66**(Liquid Surface Conditioner and Brush Cleaner)**

A clear liquid that can be applied to old enameled, painted or varnished surfaces to clean the surface, dull the gloss and insure good adhesion for a new finish coat. Eliminates the work and dust of sanding and prepares surfaces for refinishing in one easy operation. SURFACENE may also be used as a brush cleaner

4.93	1.66	.99	
------	------	-----	--

APPLICATION—Cloth or Brush

*AVAILABLE IN 5-GAL. CANS

AT 15c PER GALLON LESS THAN 1-GAL. PRICES.



Gals.	Qts.	Pts.	½ Pts.
-------	------	------	--------

SPRED PATCH Y-3475**(100% Latex Spackling Compound)**

A ready-to-use spackling compound. Will not bleed through paint, or flash. Does not shrink. Dries to a "puff" which may be easily sanded. Does not clog sandpaper. Excellent adhesion

4.83	1.72	---	.67
------	------	-----	-----

APPLICATION—Putty Knife

DRYING TIME—30 minutes

THINNER—Water

SPRED FLAT Y-3000**(Oil-Emulsion Interior Paint)**

One gallon makes six quarts of paint when mixed with two quarts of water. Easy to apply over wallpaper, new or old plaster, wallboard, painted surfaces, cement and rough tile walls. Has limited washability.

White

5.18	1.77	---	---
------	------	-----	-----

APPLICATION—Brush, Roller, Spray

DRYING TIME—30 minutes; recoat 4 to 12 hours, depending upon surface

THINNER—Water

COVERAGE—Up to 650 Sq. Ft. per gallon

SPRED BRUSH AND ROLLER CLEANER Y-60

A new easy way to clean Varnish, Enamel, Epoxy, Lacquer, Urethane, Synthetics, Shellac, Polyester and Silicone from brushes and rollers

4.73	1.62	1.02	---
------	------	------	-----

**GLID-TONE WOOD FILLER Y-700**

For use on all open-grained wood such as oak, chestnut, walnut and mahogany. Has pure silex base and will not shrink or break away from the pores of the wood when dry. Furnished in paste form. Must be reduced with naphtha or turpentine

APPLICATION—Brush, Cloth

THINNER—Turpentine, Naphtha

Gals.	Qts.	Pts.	½ Pts.
-------	------	------	--------

5.73	1.85	...	.74
------	------	-----	-----

GLOSS FINISHES

See: Japalac; Ripolin; Florenamel; Rustmaster; Craftsman.

HEAT RESISTING ALUMINUM

See: Metallite

HOUSE PAINT

See: SPRED House Paint; Endurance Paints; SPRED Glide-On; Everon; Craftsman

IRON PRIMER

See: Liquid Red Lead; Rustmaster Metal Primers

IMPERIAL ONE-COAT WHITE HOUSE PAINT

See: Endurance Imperial

INTERIOR ALUMINUM

See: Metallite All-Purpose Aluminum

JAPALAC SCREEN AND IRON ENAMEL Y-1222

Gloss black, solid-covering enamel for exterior screens, wood and metal sash, wrought iron, decorative lamps, etc. Also ideal for interior ironwork, pipes, grills, furnaces, stoves, heaters, andirons, etc. Will not clog screen mesh. Resists weather and protects metal from rusting

5.23	1.75	1.06	.72
------	------	------	-----

APPLICATION—Brush, Spray or Special Applicator

DRYING TIME—6 to 8 hours

THINNER—Mineral Spirits or Turpentine

COVERAGE—600 Sq. Ft. per gallon

JAPALAC ENAMEL Y-1200 line**Quick-Drying, Alkyd Gloss**

An extra-durable, alkyd enamel in brilliant colors that cover in ONE COAT. Bright hues and muted tones give new life and sparkle to old surfaces—walls, ceilings, woodwork and furniture. JAPALAC Quick-Drying Alkyd Enamel is formulated for the finest enameling inside and outdoors. It looks, wears and washes like baked enamel. Colors may be tinted with DRAMATONE Tinting Colors.

Ultra White, Brilliant Black, Flat Black and Colors

§Pastel Tint Base 1218 (124 oz.) (31 oz.)

§Deep Tint Base 1280 (120 oz.) (30 oz.)

§Intermediate Tint Base 1287 (122 oz.) (30.5 oz.)

For Tinting Special Colors

APPLICATION—Brush, Roller, Spray

DRYING TIME—4 to 6 hours; 24 hours for recoating

THINNER—Mineral Spirits or Turpentine

COVERAGE—Approx. 500 Sq. Ft. per gallon

§SHORT FILLED TO ALLOW ADDITION OF COLORANT.

½ Pts.	¼ Pts.
--------	--------

10.02	2.97	1.67	1.04	.68
9.83	2.87			
9.43	2.77			
9.63	2.82			



Gals. Qts. Pts. 1/2 Pts.

JAPALAC SPRAY ENAMEL Y-4000 line**In Ready-To-Spray Cans**

All-purpose, interior-exterior enamel in pressurized aerosol cans ready for immediate spraying. Extra-durable, quick-drying enamel of brilliant beauty. Gives professional appearance to porch and lawn furniture, bicycles, toys, tables, chairs, etc. Ideal for wickerwork. Colors match regular JAPALAC Alkyd Enamel colors. In addition, JAPALAC SPRAY ENAMEL is available in ready-to-spray interior-exterior Aluminum, rich Gold, and a clear finish.

16 Av. Oz.
Can

White, All Colors, and Clear

1.59

APPLICATION—Spray

DRYING TIME—Ten minutes

LATEX PAINTS

See: SPRED Products Section

***LIQUID RED LEAD (Modified) Y-506**

Recommended whenever a shop coat of red lead is specified. Comes ready to apply, is extremely elastic and is an excellent rust preventative

9.08

2.77

1.59

1.02

APPLICATION—Brush, Spray

DRYING TIME—16 hours; 48 hours for recoating

THINNER—Mineral Spirits or Turpentine

COVERAGE—500 to 600 Sq. Ft. per gallon

MACHINERY ENAMEL

See: Rustmaster Enamel; Japalac

MASONRY FINISHES

See: SPRED House Paint; Silicone Driwall; SPRED Glide-On

***METALLITE ALL PURPOSE ALUMINUM Y-592**

An extremely smooth, chrome-like aluminum finish for use on radiators, furnace jackets, airducts, hot water tanks and heaters, pipes and other interior surfaces. Will not tarnish under ordinary conditions. It maintains its brilliance. Makes an excellent sealer over asphalt. Retards corrosion caused by fumes and moisture. Withstands heat up to 500°F. Hides with one coat. Easily cleaned. Reflects light

7.18

2.24

1.32

.85

APPLICATION—Brush, Roller, Spray

DRYING TIME—2 to 4 hours; 24 hours for recoating

THINNER—Mineral Spirits or Turpentine

COVERAGE—650 Sq. Ft. per gallon

*AVAILABLE IN 5-GAL. CANS
AT 15¢ PER GALLON LESS THAN 1-GAL. PRICES.



Gals.	Qts.	Pts.	½ Pts.
-------	------	------	--------

METAL PRIMER

See: Liquid Red Lead; Rustmaster Metal Primer

MILDEW-RESISTING PAINTS

See: SPRED Glide-On; Endurance House Paint

METAL PROTECTIVE PAINTS

See: Rustmaster; Metallite; Liquid Red Lead

ONE-COAT HOUSE PAINT

See: Endurance Imperial

OIL COLORS IN TUBES

See: Colors-In-Oil

PAINT AND VARNISH REMOVER

See: Glid-Strip; Ad-El-It

PATCHING PLASTER

See: SPRED Patch

PORCH AND DECK ENAMEL

See: Florenamel (Alkyd-Polyurethane)

PRIMERS AND SEALERS

See: Alkali-Resisting Primer Y5042; Endurance Exterior Basecoat; Speed-Wall Interior Basecoat; SPRED Primer-Sealer; Gliddencat Enamel Undercoat; Ripolin Undercoat; Surface Bond

RED LEAD (Liquid)

See: Liquid Red Lead

RIPOLIN ENAMEL (Quick-Drying White) Y-2900, Y-2950

One of the oldest and finest enamels with world-wide acceptance. Architects and painters recognize RIPOLIN as the finest enamel for interior and exterior decorating. May be tinted with Colors-In-Oil or DRAMATONE Tinting Colors.

Gloss, Semi-Gloss (White Only)	10.33	3.22	1.82	1.06
--------------------------------------	-------	------	------	------

APPLICATION—Brush, Roller, Spray

DRYING TIME—6 to 8 hours; 24 hours for recoating

THINNER—Mineral Spirits or Turpentine

COVERAGE—600 Sq. Ft. per gallon

*AVAILABLE IN 5-GAL. CANS
AT 15¢ PER GALLON LESS THAN 1-GAL. PRICES.



Gals.	Qts.	Pts.	1/2 Pts.
-------	------	------	----------

RIPOLIN UNDERCOAT Y-2555

A perfect first coater for new wood or previously painted surfaces. Dries to a firm opaque film. Especially designed for use with Ripolin Semi-Gloss and Gloss Enamels. Completely hides and seals a surface so that finishing coats of Ripolin Enamel produce full luster and depth of gloss. Requires only light sanding. May be tinted with Colors-In-Oil or DRAMATONE Tinting Colors _____

7.48	2.37	1.39	----
------	------	------	------

APPLICATION—Brush, Spray

DRYING TIME—Overnight for sanding and recoating

THINNER—Mineral Spirits or Turpentine

COVERAGE—500 Sq. Ft. per gallon

***ROCKSPAR VARNISH Y-50**

Heavy bodied varnish for all interior surfaces. One coat equivalent to two coats of ordinary varnish. No shrinkage on drying. Dries with deep high gloss _____

8.18	2.52	1.46	.93
------	------	------	-----

APPLICATION—Brush

DRYING TIME—Overnight; 24 hours for recoating

THINNER—Mineral Spirits or Turpentine

COVERAGE—Up to 700 Sq. Ft. per gallon

RUSTMASTER GLOSS ENAMEL Y-470 line

A high quality versatile enamel of excellent quality. It has exceptional ease of application and may be applied by brushing, or spraying as a finish coat over metal with Y470 or Y471 Rustmaster Primer. Rustmaster Gloss Enamel guards against rusting of machinery and equipment in the factory and on the farm as well as metal surfaces around the home and schools such as metal window frames and casings, iron fences, railings, bicycles, lawn mowers, playground equipment, etc.

Royal Blue, Greenfield, Slate, Gloss Black, Flat Black,
Aluminum _____

8.93	2.72	1.56	.99
------	------	------	-----

Suntone, Flare Red _____

8.93	2.72	1.56	.99
------	------	------	-----

White _____

8.93	2.72	1.56	.99
------	------	------	-----

APPLICATION—Brush or Spray

DRYING TIME—Overnight

THINNER—Turpentine or Mineral Spirits for Brushing; VM & P
Naphtha for Spraying

COVERAGE—Up to 500 Sq. Ft. per gallon

RUSTMASTER METAL PRIMER Y-470

A new, unexcelled, fast drying corrosion resistant exterior and interior metal primer containing revolutionary Phenolic Resin Penetrating (U.S. Patent No. 2978424) that cuts through rust and seals metal pores, locking out air and corrosive moisture. A finish coat of Rustmaster Enamel will provide an exceptionally durable coating _____

8.93	2.72	1.56	.99
------	------	------	-----

APPLICATION—Brush or Spray

DRYING TIME—Overnight

THINNER—Turpentine or Mineral Spirits for brushing; VM & P
Naphtha for Spraying

COVERAGE—Up to 500 Sq. Ft. per gallon

*AVAILABLE IN 5-GAL. CANS
AT 15c PER GALLON LESS THAN 1-GAL. PRICES.



SUGGESTED RETAIL PRICE LIST No. 870

RUSTMASTER PRIMER Y-4030 (Spray Can)

Same quality as Rustmaster Metal Primer Y470, packed in handy spray can for easy, instant use. Ideal for hard-to-reach areas

APPLICATION—Spray

DRYING TIME—Overnight for recoating

Gals.	Qts.	Pts.	½ Pts.
-------	------	------	--------

13 Oz. Can			
---------------	--	--	--

1.89			
------	--	--	--

RUSTMASTER GALVANIZED PRIMER Y-471

Provides longer-lasting protection for galvanized metal and aluminum. Use on new galvanized steel without chemical treatment. This prime coat may be used as a finish coat or recoated with Rustmaster Enamel, Endurance House Paint or Japalac

APPLICATION—Brush, Roller, Spray

DRYING TIME—48 hours

THINNER—Turpentine, Mineral Spirits

COVERAGE—Approx. 350 Sq. Ft. per gallon

Gals.	Qts.	Pts.	½ Pts.
-------	------	------	--------

8.93	2.72	1.56	.99
------	------	------	-----

ROOF PAINTS

See: Aluminum Asphalt Roof Paint; Metallite All-Purpose Aluminum

SCREEN ENAMELS

See: Japalac Screen and Iron Enamel

SEMI-GLOSS ENAMELS

See: Ripolin; SPRED Lustre; Craftsman

SILICONE SLICK SPRAY Y-58

(Miracle Lubricant With 1001 Uses)

A new, spray lubricant that protects and preserves while it lubricates. An excellent ice and water repellent. Push button spray lubricates hard-to-reach parts and areas. Makes windows, drawers, doors and other sticking items slide freely. Stops squeaks

6 Oz. Can	16 Oz. Can
--------------	---------------

1.59	2.95
------	------

SPACKLING COMPOUND

See: SPRED Patch

SPAR VARNISH

See: Glid-Tone Spar Varnish

***SPEED-WALL ALKYD INTERIOR BASECOAT Y-4516**

A ready-to-use, low odor, alkyd-type primer sealer for new and old interior wall surfaces of plaster, masonry or wallboard. Also for previously painted walls in poor condition and patched areas. Its remarkable ease of brushing and exceptional filling, sealing, hiding, and alkali-resisting properties are gained through the use of special resins, pigments, and oils

APPLICATION—Brush, Roller, Spray

DRYING TIME—Overnight for recoating

THINNER—Mineral Spirits or Turpentine

COVERAGE—Up to 450 Sq. Ft. per gallon

Gals.	Qts.
-------	------

5.88	1.85
------	------

SPRED PRODUCTS

See: SPRED Products Section

STAINS

See: Glid-Tone Stain

*AVAILABLE IN 5-GAL. CANS

AT 15¢ PER GALLON LESS THAN 1-GAL. PRICES.



Gals.	Qts.	Pts.	1/2 Pts.
-------	------	------	----------

***STOCK FARM WHITE PAINT Y-596**

An excellent low cost exterior paint for use on wood surfaces such as fences, barns, outbuildings, sheds, etc. This material, produced for use in stock farms, is formulated without lead pigments, and contains wood preservatives. The creosote-like odor tends to repel livestock

6.53	---	---	---
------	-----	-----	-----

APPLICATION—Brush, Spray

DRYING TIME—Overnight; 24 hours for recoating

THINNER—Mineral Spirits or Turpentine

COVERAGE—Up to 450 Sq. Ft. per gallon depending upon surface condition

STOVE AND IRON ENAMEL

See: Japalac Screen and Iron Enamel

SURFACE CONDITIONER

See: SPRED Surfacene; Surface Bond

TILE ROOF PAINT

See: SPRED Glide-On

TINTING COLORS

See: Dramatone Multi-Purpose Tinting Colors; Colors-In-Oil

TRIM AND SHUTTER COLORS

See: Endurance House Paint

TUBE COLORS

See: Dramatone Multi-Purpose Tinting Colors; Colors-In-Oil

UNDERCOATERS

See: Gliddencat; Ripolin Undercoat; Surface Bond; Speed-Wall Interior Basecoat; SPRED Primer-Sealer; Endurance Exterior Basecoat; Rustmaster Metal Primer 470; Rustmaster Galvanized Primer 471.

VAPOR BARRIER

See: SPRED Primer-Sealer

VARNISHES

See: Glid-Tone Spar; Glid-Tone Satin Sheen; Glid-Tone Gloss; Rockspar, Xpert

VARNISH REMOVER

See: Ad-El-It; Glid-Strip

VINYL-LATEX PAINT

See: SPRED Glide-On

**WOOD FILLER**

See: Glid-Tone Wood Filler

WOOD FINISHES

See: Glid-Tone Products, Xpert

WOOD STAIN

See: Glid-Tone Stain

Gals.

Qts.

Pts.

½ Pts.

Xpert Polyurethane Liquid Plastic Satin Sheen Y-37

Clear plastic satin-sheen finish for interior-exterior use. Outwears conventional interior finishes two to one. Provides 25% more durability for exteriors. For use on floors, furniture, paneling or exterior redwood, doors, shutters, etc. Not recommended over shellac, lacquer sanding sealers, lacquer or for large areas of exterior siding

11.30

3.29

1.84

Xpert Polyurethane Liquid Plastic Clear Gloss Y-51

Clear, high gloss plastic finish that will outwear conventional lacquers and varnishes two to one for interior use. Gives up to 25% greater durability for exteriors. May be used on floors, furniture, paneling or exterior redwood, cedar doors, etc. Not recommended over shellac, lacquer sanding sealers, lacquer or for large areas of exterior siding

9.43

2.82

1.61

Xpert Wood Finish Clear Y-2842

A water white lacquer; provides a clear, satin sheen finish for interior wood floors, paneling, trim, cabinets and fine furniture. Dries in thirty minutes and may be recoated in two hours. It is non-yellowing and has good resistance to water, alcohol and chemicals

7.78

2.41

1.39

NOTE: Although the formulations and recommendations contained in this price list have been established through careful evaluation, users of Glidden paints are urged to obtain specific information concerning their painting requirements. Seller's liability shall in no event exceed value of this material, which is warranted only to conform to formula or sample. Seller hereby expressly excludes all other express or implied warranties whatsoever.

SUGGESTED RETAIL PRICE LIST No. 870

Gals. Qts. Pts. ½ Pts.

Gals.	Qts.	Pts.	½ Pts.
-------	------	------	--------

CODE NUMBER AND DESCRIPTION

Y-1. Glid-Tone Gloss Varnish	Y-1287 Japalac Int. Tint Base	Y-3050 Spred Stipple Text. Bone White	Y-4559 Speedenamel Light Yellow
Y-30 Glid-Tone Redwood Clear Finish	Y-1701 Colors in Oil Yellow Ochre	Y-3400 Spred Satin High Hiding White	Y-4560 Speedenamel Med. Yellow
Y-31 Glid-Tone Redwood Stain	Y-1702 Colors in Oil Burnt Sienna	Y-3401 Spred Satin Pale Ivory	Y-4561 Speedenamel Light Gray
Y-37 Xpert Satin Sheen	Y-1703 Colors in Oil Burnt Umber	Y-3405 Spred Satin Confetti Yellow	Y-4562 Speedenamel Machine Gray
Y-47 Glid-Tone Satin Sheen Varnish	Y-1705 Colors in Oil Med. Chrome Green	Y-3406 Spred Satin Light Apricot	Y-4564 Speedenamel Imperial Blue
Y-48 Glid-Tone Spar Varnish	Y-1706 Colors in Oil Lt. Chrome Yellow	Y-3407 Spred Satin Pinelrost Green	Y-4565 Speedenamel Bright Red
Y-50 Rockspar Varnish	Y-1707 Colors in Oil Med. Chrome Yel.	Y-3410 Spred Satin Spray Blue	Y-4566 Speedenamel Light Green
Y-51 Xpert Clear Gloss	Y-1708 Colors in Oil Raw Umber	Y-3412 Spred Satin Blue Azure	Y-4569 Speedenamel Hydro Blue
Y-55 Surface Bond	Y-1709 Colors in Oil Ivory Black	Y-3413 Spred Satin Bone White	Y-4570 Speedenamel Red Oxide
Y-58 Silicone Slick Spray	Y-1711 Colors in Oil Prussian Blue	Y-3415 Spred Satin Blossom Pink	Y-4571 Speedenamel Spring Green
Y-60 Spred Brush and Roller Cleaner	Y-1716 Colors in Oil Lt. Chrome Yellow	Y-3416 Spred Primer Sealer	Y-4572 Speedenamel Neutral Gray
Y-66 Spred Surfacing	Y-1717 Colors in Oil Amer. Vermilion	Y-3418 Spred Satin Dec. Tint White (Pastel Tint Base)	Y-4573 Speedenamel EZC Green
Y-70 Adelite Paint & Varnish Remover	Y-1718 Colors in Oil Venetian Red	Y-3434 Spred Satin Charcoal Black	Y-4575 Speedenamel Tint White
Y-74 Glid-Strip Paint & Var. Remover	Y-1719 Colors in Oil Raw Sienna	Y-3441 Spred Satin Cneer	Y-4576 Speedenamel Deep Orange
Y-242 Glid-Tone Stain—Honey Maple	Y-1720 Colors in Oil Lamplblack	Y-3443 Spred Satin Cotton Candy	Y-4577 Speedenamel Man. Brown
Y-243 Glid-Tone Stain—Fr. Provincial	Y-1742 Colors in Oil Dark Chrome Yel.	Y-3447 Spred Satin Sandy Beige	Y-4600 Spred Lustre Silver White
Y-244 Glid-Tone Stain—Mod. Red Mah.	Y-1745 Colors in Oil Perma Green	Y-3449 Spred Satin Oyster White	Y-4605 Spred Lustre Peach Glow
Y-245 Glid-Tone Stain—Walnut	Y-1746 Colors in Oil Perma Blue	Y-3452 Spred Satin Silver Tint	Y-4613 Spred Lustre Tinting White
Y-246 Glid-Tone Stain—Wheat	Y-1750 (N-T) Neutral Toner	Y-3453 Celadon Green	Y-4641 Spred Lustre Crocus Yellow
Y-247 Glid-Tone Stain—Blonde	Y-1751 (F-R) Fast Red	Y-3467 Spred Satin Pebble Beach	Y-4643 Spred Lustre Cotton Candy
Y-248 Glid-Tone Stain—Brown Mah.	Y-1752 (Y-OX) Yellow Oxide	Y-3470 Spred Satin Ceiling Flat White	Y-4647 Spred Lustre Sahara
Y-249 Glid-Tone Stain—Platinum	Y-1753 (L-Y) Lemon Yellow	Y-3472 Spred Satin Medallion Gold	Y-4649 Spred Lustre Oyster White
Y-250 Glid-Tone Stain—Suntan	Y-1754 (YE-G) Yellow Green	Y-3475 Spred Patch	Y-4651 Spred Lustre Congo Ivory
Y-251 Glid-Tone Stain Reducer	Y-1755 (T-GR) Thalo Green	Y-3477 Spred Satin Biscayne Blue	Y-4652 Spred Lustre Silver Tint
Y-252 Glid-Tone Stain—Maple	Y-1756 (T-BL) Thalo Blue	Y-3478 Spred Satin Aquaglow	Y-4653 Spred Lustre Celadon Green
Y-254 Glid-Tone Stain—Cherry	Y-1757 (VIO) Violet	Y-3479 Spred Satin Sherwood Green	Y-4655 Spred Lustre Springtime
Y-255 Glid-Tone Stain—Ebony	Y-1758 (R-O) Rich Orange	Y-3480 Spred Satin Dramatone Tint. Base	Y-4657 Spred Lustre Woodland
Y-257 Glid-Tone Stain—Driftwood	Y-1782 (BLK) Black	Y-3482 Spred Satin Beaver Brown	Y-4660 Spred Lustre Zircon
Y-258 Glid-Tone Stain—Fruitwood	Y-1786 (OX-R) Oxide Red	Y-3484 Spred Satin Cherry Red	Y-4662 Spred Lustre Blue Ice
Y-259 Glid-Tone Stain—Butternut	Y-1800 Endurance House Paint White	Y-3487 Spred Satin Int. Tinting Base	Y-4663 Spred Lustre Smoky White
Y-260 Glid-Tone Regrain Ground Coat	Y-1802 Endurance House Paint Black	Y-3501 Spred Glide-On Bamboo	Y-4665 Spred Lustre Pink Haze
Y-470 Rustmaster Primer	Y-1813 End. H.P. Tobacco Brown	Y-3504 Spred Glide-On Silver Smoke	Y-4672 Spred Lustre Medallion Gold
Y-471 Rustmaster Galvanized Primer	Y-1818 End. H.P. Pastel Tint Base	Y-3506 Spred Glide-On Tang Red	Y-4677 Spred Lustre Biscayne Blue
Y-472 Rustmaster Aluminum	Y-1828 End. H.P. Crysile Green	Y-3507 Spred Glide-On Sunflower	Y-4678 Spred Lustre Aquaglow
Y-475 Rustmaster White	Y-1851 End. Basecoat Mildew & Fume Res.	Y-3510 Spred Glide-On Jewel Green	Y-4679 Spred Lustre Sherwood Green
Y-476 Rustmaster Black	Y-1855 End. H.P. Castle Red	Y-3513 Spred Glide-On Gray Velvet	Y-4680 Spred Lustre Dramatone Tinting Base
Y-477 Rustmaster Flat Black	Y-1856 End. H.P. Ivory	Y-3115 Spred Glide-On Lt. Tangerine	Y-4582 Spred Lustre Beaver Brown
Y-478 Rustmaster Suntone	Y-1857 End. H.P. Cream	Y-3516 Spred Glide-On Mist Brown	Y-4684 Spred Lustre Cherry Red
Y-479 Rustmaster Royal Blue	Y-1859 End. H.P. Light Gray	Y-3518 Spred Glide-On Pastel Tint Base	Y-4687 Spred Lustre Int. Tinting Base
Y-480 Rustmaster Greenfield	Y-1860 End. H.P. Medium Gray	Y-3519 Spred Glide-On Cascade	Y-5700 Brush-Day-Lite Super White
Y-481 Rustmaster Flare Red	Y-1861 End. H.P. Shutter Green	Y-3525 Spred Glide-On Non-Chalk White	Y-5701 Brush-Day-Lite A. Flat Dutch Ivory
Y-482 Rustmaster Slate	Y-1867 End. H.P. Imperial White	Y-3580 Spred Glide-On Deep Tint Base	Y-5707 Brush-Day-Lite A. Flat Mint Green
Y-500 Endurance House Paint Barn Red	Y-1871 End. H.P. Dark Blue	Y-3587 Spred Glide-On Int. Tint Base	Y-5710 Brush-Day-Lite A. Flat Ocean Spray
Y-506 Ready Mixed Red Lead	Y-1872 End. H.P. Dark Walnut	Y-3600 Spred Latex H.P. White	Y-5712 Brush-Day-Lite A. Flat Chelsea Blue
Y-555 Gliddencat Enamel Und. White	Y-1877 End. H.P. Int. Tint Base	Y-3602 Spred Latex H.P. Sunbeam Yel.	Y-5713 Brush-Day-Lite A. Flat Buhrstone
Y-592 All-Purpose Metallite Alum. Paint	Y-1886 End. H.P. Light Canary	Y-3603 Spred Latex H.P. Taffy	Y-5718 Brush-Day-Lite A. Flat Tinting White
Y-596 Stock Farm Paint White	Y-1887 End. H.P. Deep Tint Base	Y-3606 Spred Latex H.P. Dover Gray	Y-5743 Brush-Day-Lite A. Cloud Pink
Y-605 Aluminum Asphalt Roof Paint	Y-1897 End. H.P. Pastel Green	Y-3607 Spred Latex H.P. Bayberry	Y-5747 Brush-Day-Lite A. Flat Taupe
Y-700 Glid-Tone Natural Wood Filler	Y-1891 End. H.P. Turquoise	Y-3608 Spred Latex H.P. Bark	Y-5767 Brush-Day-Lite A. Flat Beige
Y-854 Florenamel Tile Red	Y-1892 End. H.P. Non-Chalking White	Y-3612 Spred Latex H.P. Evergreen	Y-5778 Brush-Day-Lite A. Flat Aqua Surf
Y-871 Florenamel Tile Green	Y-1971 Blockaid	Y-3613 Spred Latex H.P. Onyx	Y-5780 Brush-Day-Lite A. Flat Dramatone Tinting Base
Y-874 Florenamel Harbor Gray	Y-2200 Everon House Paint White	Y-3616 Spred Latex H.P. Polo Tan	Y-5787 Brush-Day-Lite A. Intermediate Tinting Base
Y-875 Florenamel Chateau Gray	Y-2217 Craftsman H.P. Mildew Resistant	Y-3620 Spred Latex H.P. Cape Cod Red	Y-6500 Craftsman Gloss Enamel White
Y-876 Florenamel Spice Wood	Y-2218 Craftsman House Paint White	Y-3625 Spred H.P. Tinting White	Y-6650 Craftsman Alkyd Semi-Gloss En. Alaska White
Y-918 Poly. Florenamel Pastel Tint Base	Y-2535 Ripolin Undercoat White	Y-3651 Spred Prime Coat No. 1	Y-6651 Craftsman Alkyd Semi-Gloss En. Tusky Ivory
Y-980 Poly. Florenamel Deep Tint Base	Y-2750 End. Velvet H.P. White	Y-4000 Japalac Spray Enamel White	Y-6652 Craftsman Alkyd Semi-Gloss En. Spearmint
Y-987 Poly. Florenamel Int. Tint Base	Y-2751 End. Velvet H.P. Mayflower Yel.	Y-4001 Japalac Spray Enamel Flat Black	Y-6653 Craftsman Alkyd Semi-Gloss En. Azalea
Y-991 Poly. Florenamel Tile Red	Y-2752 End. Velvet H.P. Sterling Gray	Y-4002 Japalac Spray Enamel Gloss Black	Y-6654 Craftsman Alkyd Semi-Gloss En. Pewter Gray
Y-992 Poly. Florenamel Tile Green	Y-2756 End. Velvet H.P. Cottage Ivory	Y-4003 Japalac Spray Enamel Delphinium	Y-6655 Craftsman Alkyd Semi-Gloss En. Aqua
Y-993 Poly. Florenamel Harbor Gray	Y-2758 End. Velvet H.P. Granada Red	Y-4004 Japalac Spray Enamel Dawn Gray	Y-6656 Craftsman Alkyd Semi-Gloss En. Hemp
Y-994 Poly. Florenamel Chateau Gray	Y-2759 End. Velvet H.P. Shrub Green	Y-4005 Japalac Spray Enamel Bud Green	Y-6657 Craftsman Alkyd Semi-Gloss En. Brook Blue
Y-995 Poly. Florenamel Spice Wood	Y-2761 End. Velvet H.P. Brown Antique	Y-4006 Japalac Spray Enamel Vermilion	Y-6658 Craftsman Alkyd Semi-Gloss En. Maytime
Y-1201 Glid-Tone Var. Stain, Dark Oak	Y-2764 End. Velvet Shadow Green	Y-4008 Japalac Spray Aluminum	Y-6659 Craftsman Alkyd Semi-Gloss En. Bone White
Y-1202 Glid-Tone Varnish Stain, Walnut	Y-2765 End. Velvet H.P. Oxford Gray	Y-4009 Japalac Spray Gold	
Y-1203 Glid-Tone Varnish Stain, Mah.	Y-2766 End. Velvet H.P. Safari	Y-4010 Japalac Spray Clear Plastic	
Y-1207 Japalac Brilliant Black	Y-2842 Xpert Clear Wood Finish	Y-4011 Japalac Spray Copper Tone	
Y-1208 Japalac Flat Black	Y-2900 Ripolin Ultra White	Y-4015 Japalac Spray Enamel Lemon Yel.	
Y-1212 Japalac Bud Green	Y-2950 Ripolin Semi-Gloss Enamel White	Y-4016 Japalac Spray Enamel Greenbrier	
Y-1217 Japalac Ultra White	Y-3000 Spred Flat White	Y-4017 Japalac Spray Flat White	
Y-1218 Japalac Pastel Tint Base	Y-3050 Craftsman Latex Pt. Alaska White	Y-4018 Japalac Spray Blue Turquoise	
Y-1219 Japalac Dawn Gray	Y-3051 Craftsman Latex Pt. Tusk Ivory	Y-4019 Japalac Spray Tan Bark	
Y-1222 Japalac Screen Black	Y-3052 Craftsman Latex Pt. Spearmint	Y-4030 Rustmaster Primer	
Y-1246 Japalac Rich Blue	Y-3053 Craftsman Latex Pt. Azalea	Y-4516 Interior Base Coat	
Y-1250 Japalac Delphinium	Y-3054 Craftsman Latex Pt. Pewter Gray	Y-4550 Speedenamel White	
Y-1255 Japalac Light Ivory	Y-3055 Craftsman Latex Pt. Aqua	Y-4551 Speedenamel Black	
Y-1256 Japalac Vermilion	Y-3056 Craftsman Latex Pt. Hemp	Y-4552 Speedenamel Orange	
Y-1260 Japalac Rose Pink	Y-3057 Craftsman Latex Pt. Brook Blue	Y-4553 Speedenamel Deep Green	
Y-1263 Japalac Botany Brown	Y-3058 Craftsman Latex Pt. Maytime	Y-4554 Speedenamel Med. Green	
Y-1267 Japalac Ribbon Blue	Y-3059 Craftsman Latex Pt. Bone White	Y-4556 Speedenamel Fire Red	
Y-1270 Japalac Lemon Yellow			
Y-1271 Japalac Greenbrier			
Y-1280 Japalac Deep Tint Base			

THE GLIDDEN COMPANY

National Headquarters
900 Union Commerce Building
Cleveland, Ohio 44114

SALES OFFICES AND FACTORIES: New York • San Francisco • Los Angeles
Minneapolis • Dallas • Chicago • St. Louis • New Orleans • Cleveland
Atlanta • Portland • Reading • Canada: Toronto and Montreal

Branches in principal cities throughout the United States and Canada.