




Pushbutton and Rotary Drum Master Stations

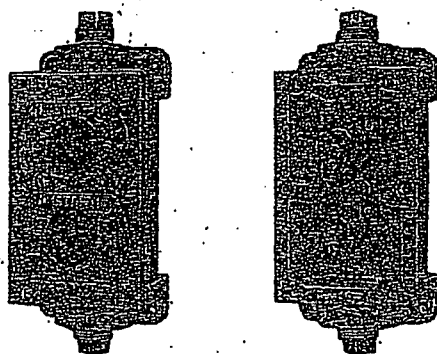

TWO UNIT HEAVY DUTY STATION WITH TWO
HEAVY DUTY MOMENTARY CONTACT ELEMENTS.

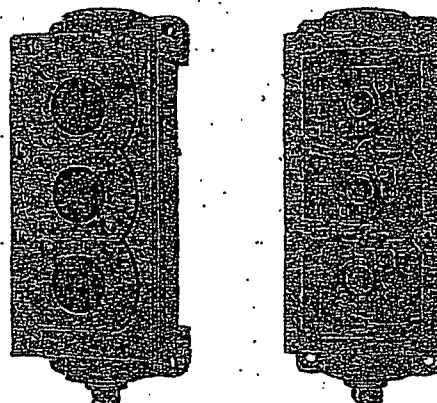

THREE UNIT HEAVY DUTY STATION WITH
HEAVY DUTY MOMENTARY CONTACT ELEMENTS.

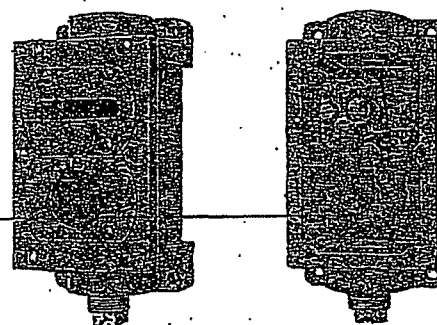

TWO UNIT HEAVY DUTY STATION WITH ONE
MOMENTARY CONTACT AND ONE INDICATING LIGHT.

Service Class... Navy A.
Specifications... Designed to meet the requirements of Service A of Department of Defense Specifications MIL-C-2174, dated May 9, 1950 and MIL-C-2212 dated June 13, 1950.
Enclosure... Spraytight.
Operation... Manual.
Location... Remote.
Ambient Temp... 40° C or 50° C.
Insulation... Class B.
Ratings... Pilot circuits only.

Type of Element	Con- duc- tion Cap- a- city Amps.	INDUCTIVE RATINGS					
		A-c (60 Cycles)			D-c		
		Volts	Amperes		Volts	Amperes	
Heavy duty Momentary Contacts	10	440	10	2.5	250*	0.4	0.4
	10	220	20	5.	230	0.75	0.75
	10	110	40	10.	115	1.5	1.5
Standard duty Momentary Contacts	10	440	6	0.5	250*	1.	0.1
	10	220	12	1.	230	1.	0.5
	10	110	25	2.	115	1.	1.
Rotary Drum switch Contacts	15	440	12	1.	250*	2.	0.2
	15	220	25	2.	230	2.	0.75
	15	110	40	4.	115	2.	1.5
Rocker arm 2 pole Snap switch Poles in series	10	440	10	2.5	250*	0.4	0.4
	10	220	20	5.	230	0.75	0.75
	10	110	40	10.	115	1.5	1.5
Rocker arm 2 pole Snap switch Poles not in series	15	440	5	1.25	250*	0.2	0.2
	10	220	10	2.5	230	0.4	0.4
	10	110	20	5.	115	0.5	0.8

* Nominal submarine voltage (355 volts maximum)

For Prices, See Price List Bul. 6900A

When ordering specify:

- 1—Type of station.
- 2—Number of elements.
- 3—Type of elements.
- 4—Function and circuit arrangement of each element.
- 5—For indicating light elements, color of lens.
- 6—Legend required for each element.
- 7—Voltage A-c or D-c.
- 8—Application.

REPAIR PARTS

A set of on board repair parts (spare parts) consists of the following:

- 1—Pushbutton elements.
 - a. 1 pushbutton element of each size and type.
- 2—Rotary drum switches.
 - a. 1 set contacts.
 - b. 1 set springs.
 - c. 1 cylinder each type.
- 3—Indicating lights.
 - a. 1 set light bulbs.
 - b. 1 each size and type resistor (if used).
 - c. 1 complete transformer (if used).

When ordering renewal parts for master stations in service, be sure to give nameplate data and description of parts required.

Continued

CUTLER-HAMMER, INC.



MILWAUKEE 1, WISCONSIN

PAGE 1

CUTLER 111/399

12/1/2006