


Stack Heater Co.

Boston, Mass.

Engineers

Manufacturers

Water Heaters for All Domestic and Industrial Requirements

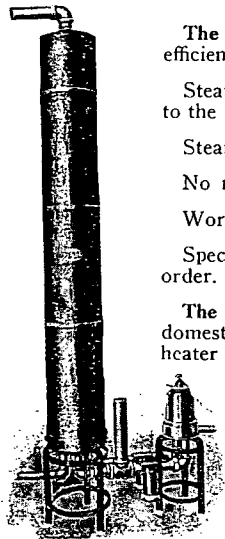

Instantaneous Steam Water Heater (Capacities 10 to 2000 gal. per minute)

The Stack Instantaneous Steam Water Heater is a simple, yet efficient device, for supplying clean hot water.

Steam does not mix with the water, it merely transfers its heat to the water in the copper tubes.

Steam is used only while water is being drawn.

No moving parts or expansion joints.

Works efficiently on exhaust or high pressure steam.

Special Stack Instantaneous Steam Water Heaters are built to order. Full information will be furnished upon request.


The Stack Indirect Heater, at practically no cost, heats the domestic hot water to a uniform temperature, using the house heater as a heating medium.

The domestic hot water passes through the copper coil in the heater and the hot water from the house heating plant flows around the copper coil.

The two waters never mix.

All coils tested to 600 pounds pressure and the casings tested to 250 pounds pressure at our factory.

Full information, including installation diagrams, will be furnished upon request.

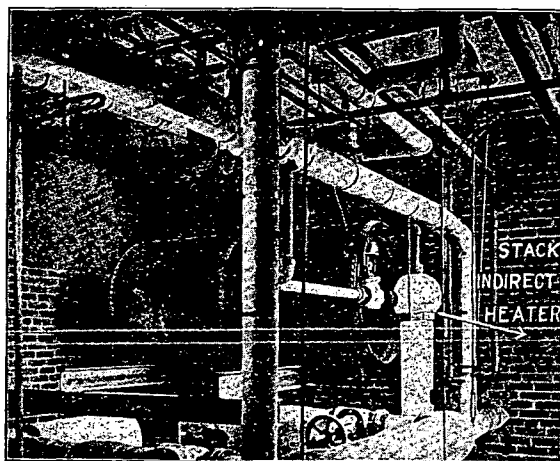

Boiler Room, Trumbull Hospital, H. F. Kellogg, Arch. Installed by Eastern Power & Heating Corp.

Construction of Indirect Water Heater, showing the Copper Tubes within the Shell. This Heater is made in all sizes.



Thermal Appliance Co.

342 Madison Ave.


New York, N. Y.

"TACO" WATER HEATERS

for Domestic Service

and for Hotels, Apartment Houses, Institutions, Mills, Factories, Industrial Plants and Restaurants

Trade Mark **TACO** Patent Pending



Standard Domestic "Taco" Heater Installation. Note the simple piping.

Domestic TACO Water Heaters (External Type)
for use with steam heating boilers

Size No.	Range Suitable for Gals.	Shipping Weight Lbs.	List Price
Special 30	30	12	\$15.00
1	40	18	20.00
2	80	28	30.00
3	160	53	50.00

Flo-Line TACO Water Heaters (External Type)
for use with steam or hot water heating boilers

Size No.	Range Suitable for Gals.	Shipping Weight Lbs.	List Price
01	60	20	\$25.00
02	120	40	35.00
03	240	80	55.00

TACO Universal (Firepot Type) Water Heaters

for connection to steam or hot water house heating boilers. Made of malleable iron, tested to 250 pounds pressure.

Size No.	Type, Studs on centers as below Inches	Range Suitable for Gals.	List Price
9-30	6"	30	\$8.00
9-60	6"	60	14.00
6-9-30*	None	30	8.00
6-9-60*	None	60	14.00
3-30†	None	30	8.00
3-60†	None	60	14.00


* Will fit any boiler with either 6, 9, or more inch center to center coil openings.

† Will fit sectional boilers with 3 inch center to center coil openings or can be used with hot air furnaces.


TACO Automatic Water Heaters

for supplying hot water in quantity.


Heat water as it flows through. Operate on live or exhaust steam. Used with or without storage tank. Automatic thermostatic valve control. Prices on request.




Universal "Taco" Water Heater as installed.

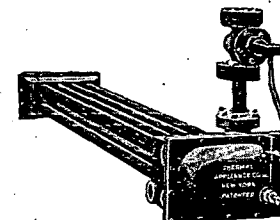


"Taco" Automatic Water Heater Built in both high and low pressure types in 12 sizes from 100 to 10,000 gallons per hour capacity.




Special No. 30 Domestic "Taco"



No. 02 Flo-Line "Taco" Heater



No. 9-30 Universal "Taco"



No. 6-9-60 Universal "Taco"