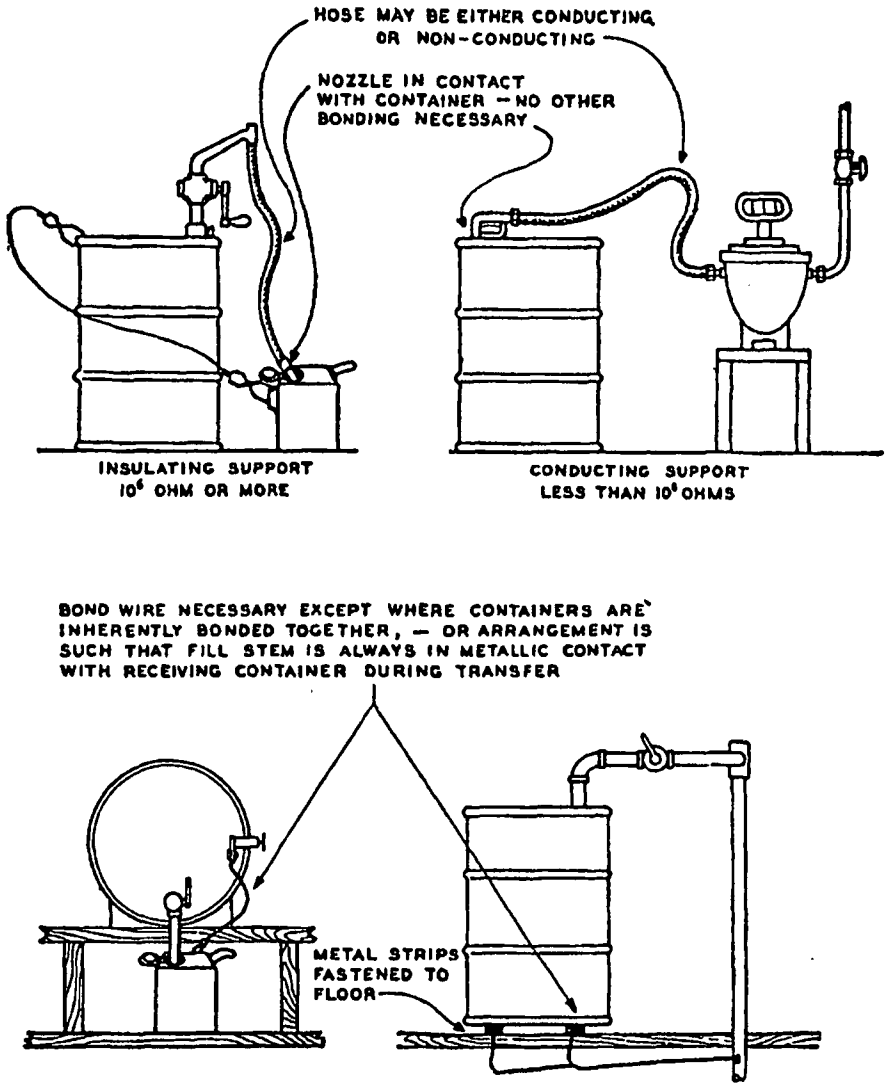


Fig 32-4 Bonding during container filling permits safe discharge of any static electricity generated

Courtesy National Fire Protection Association

conduits, and switches should be grounded in accordance with the requirements for installation of electrical and power equipment outlined in the *National Electrical Code*

When flammable liquids are poured from one container to another, a bonding means should be provided between the two containers prior to pouring, as shown in Fig 32-4

In areas where flammable liquids are