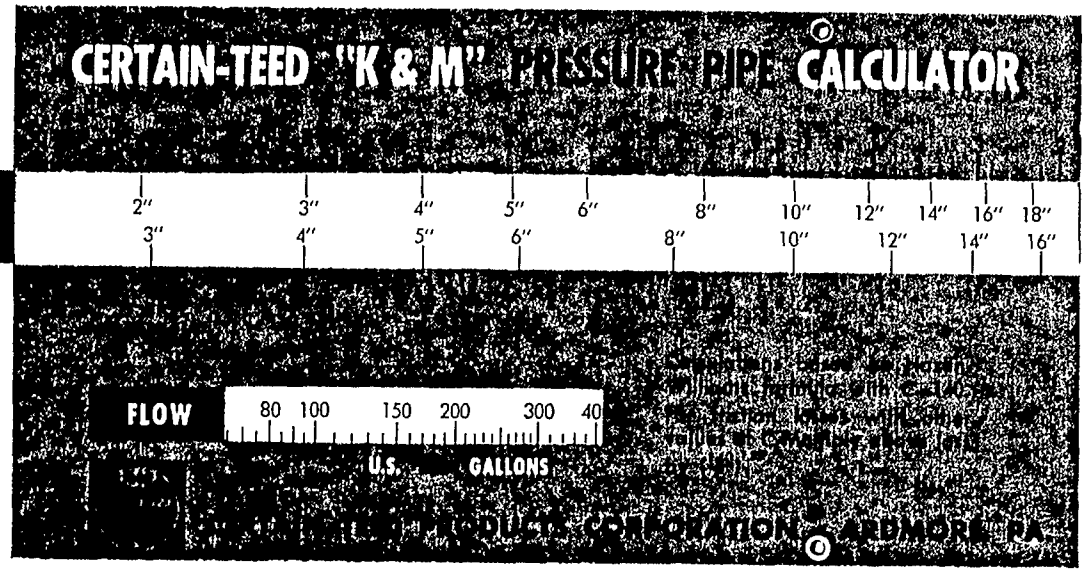

For sewage force main, water main and gravity sewer installations specify Certain-teed "K & M" Asbestos-Cement Pipe and FLUID-TITE® Couplings.

- Tight Joints
- Smooth Bore
- Strong
- Durable
- Light Weight
- Easily Installed
- Workable
- Practically no Maintenance
- Immune to Electrolysis
- Corrosion Resistant
- Non-Tuberculating

PRINTED IN U.S.A.

tabbies
PLAINTIFF'S EXHIBIT
JMMC-303

COPY FORM	INITIALS	DATE

BOX NUMBER	SEGMENT NO.	REQUESTING PARTY
04-1957		

NOTES

Australian Blue

1964