



FEDDERS

MANUFACTURING COMPANY, INC.
85 TONAWANDA ST.
BUFFALO, NEW YORK

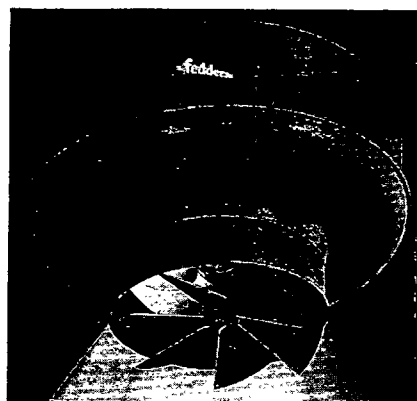

Series 8 Unit Heaters—150 to 1800 EDR

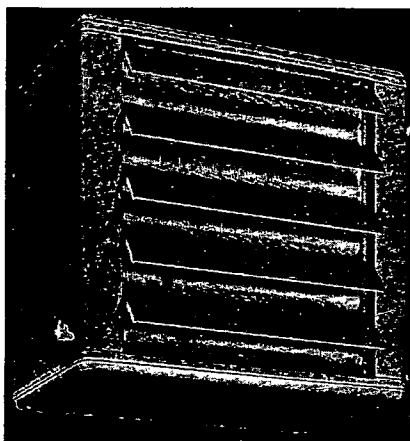

FEDDERS UNIT HEATERS Horizontal Type

Provide directional control of heated air. Maximum heat transfer per pound of metal—75 to 1200 EDR.


FEDDERS UNIT HEATERS Vertical Type

Designed for high ceiling installations where supply and return piping will not interfere with overhead equipment such as cranes, shafting, tall machinery. High velocity fan delivers heated air down to the working zone where draftless diffusion is accomplished by using suitable directional outlet to fit conditions.

FEDDERS TYPE K HEATING COILS

Strong, rigid casings . . . large cylindrical headers . . . full-floating protection against overall expansion . . . top header tri-point supported by center anchorage brackets and drop forged bronze trunnions . . . knee action relief of differential expansion among tubes . . . scale breaker-tube orifices . . . floating type tube supports . . . permanently bonded fins and tubes.

7 Standard Face Widths 12 3/4 in. to 36 1/2 in.
18 Standard Face Lengths 1 1/2 ft. to 10 ft.

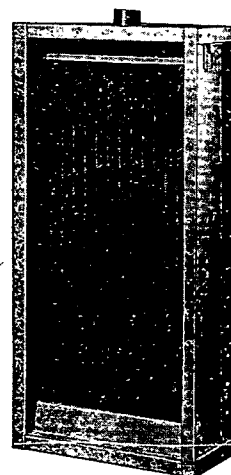

Also,
Unit Coolers
Cooling Coils
Air Conditioning
Units



Hastings Air Conditioning Co., Inc.

Hastings, Nebr.

Manufacturers of



Air Conditioners.
Unit Heaters.
Utility and Package Blowers.

Dealers and Representatives in Principal Cities

A Complete Line of Highly Successful COLD WATER Air Conditioners.
Capacities listed depend on entering air and water temperatures.


All equipment available for combination heating and cooling.

FLOOR MODELS

Floormasters—Unusual design and special features permit maximum installation possibilities with minimum floor space and installation costs.


Air Delivery—2240 cfm.
Cooling Capacity—3 to 6 tons. **Dimensions**—Height 93 in., Width 48 in. **Depth** 25 in. **Motor**—1/2 hp. **Filters**—3 16 in. x 25 in.

Royal—For offices, homes, hospitals, etc.
Air Delivery—590 cfm.
Cooling Capacity—1 to 2 tons. **Motor**—1/6 hp. **Filter**—1 16 in. x 25 in.
Dimensions—Height 40 in., Width 28 in., Depth 20 1/2 in.



GENERAL UTILITY MODELS

Master—Singly or in multiple are suitable for any business or space size. Large jobs handled without duct work by proper location of units.




Air Delivery—2,240 cfm. **Cooling Capacity**—3 to 6 tons. **Dimensions**—Height 29 in., Width 49 in., Depth 50 in. **Motor**—1/2 hp. **Filters**—4 16 in. x 23 in.

Majestic—Similar to Master except size. **Air Delivery**—1120 cfm. **Cooling Capacity**—1 1/2 to 3 tons. **Motor**—1/4 hp. **Filters**—2 16 in. x 25 in. **Dimensions**—Height 26 in., Width 28 in., Depth 40 in.

Zephyr—Same capacity, motor and filter as the Royal. For use where suspended or concealed units are desired. **Dimensions**—Height 26 in., Width 24 in., Depth 28 in.


CENTRAL PLANTS



Sectional construction for ease of handling. Motors inside mounted to provide very neat appearing compact units.

SPECIFICATIONS

Size	CFM	Motor Hp	Filters	Capacity Tons
CP 30	3,000	1	5	4-9
CP 40	4,000	1	8	6-12
CP 60	6,000	2	10	9-18
CP 80	8,000	3	12	12-24
CP120	12,000	5	20	18-36



PACKAGE AND OPEN TYPE BLOWERS

May be knocked down for narrow doorways. Finished in attractive green wrinkle.

Utility type blowers are available with or without motors and in any discharge desired.

All sizes from 9 in. to twin 21 in.
Air deliveries from 1000 cfm to 16,000 cfm.

