2 PREPARATION FOR APPLICATION

2A EQUIPMENT AND DUCTWORK

2A1 A material and fabrication take-off shall be made several days prior to the date the equipment or ductwork is to be released for insulating.

2A1.1 A sketch shall be made showing the pertinent dimensions and giving all imformation required for the fabrication of the insulation material. (See figure 1A & B)

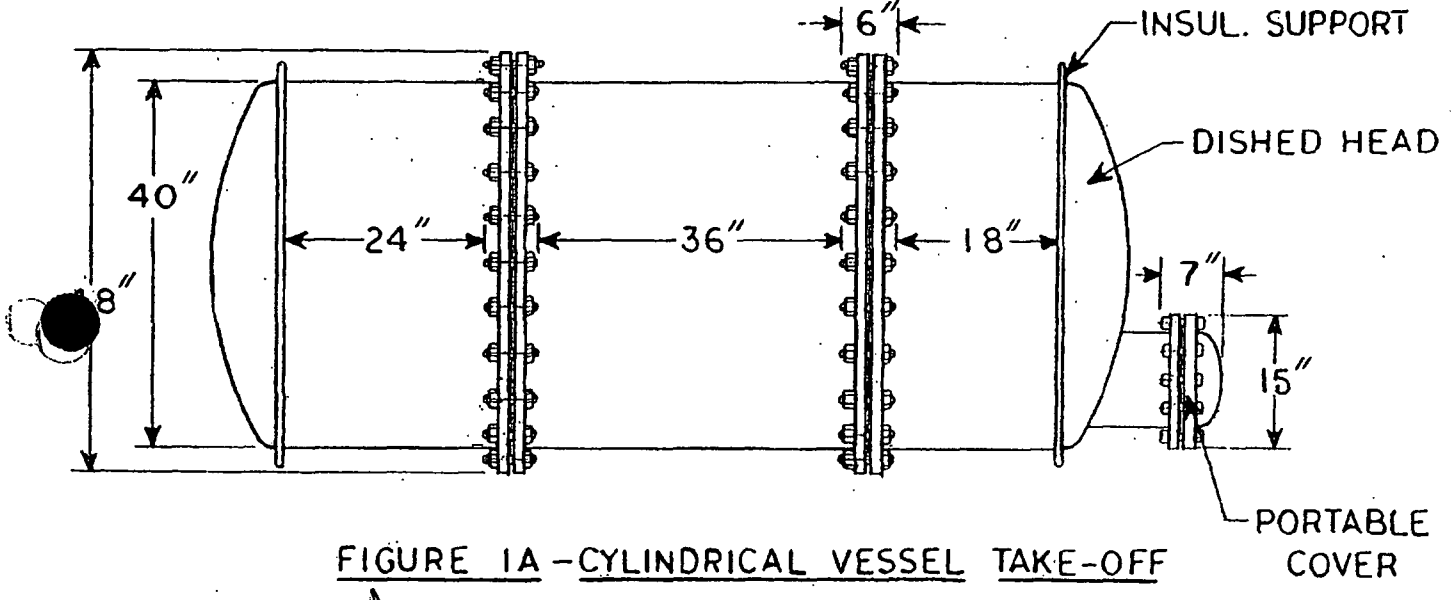


FIGURE 1A - CYLINDRICAL VESSEL TAKE-OFF

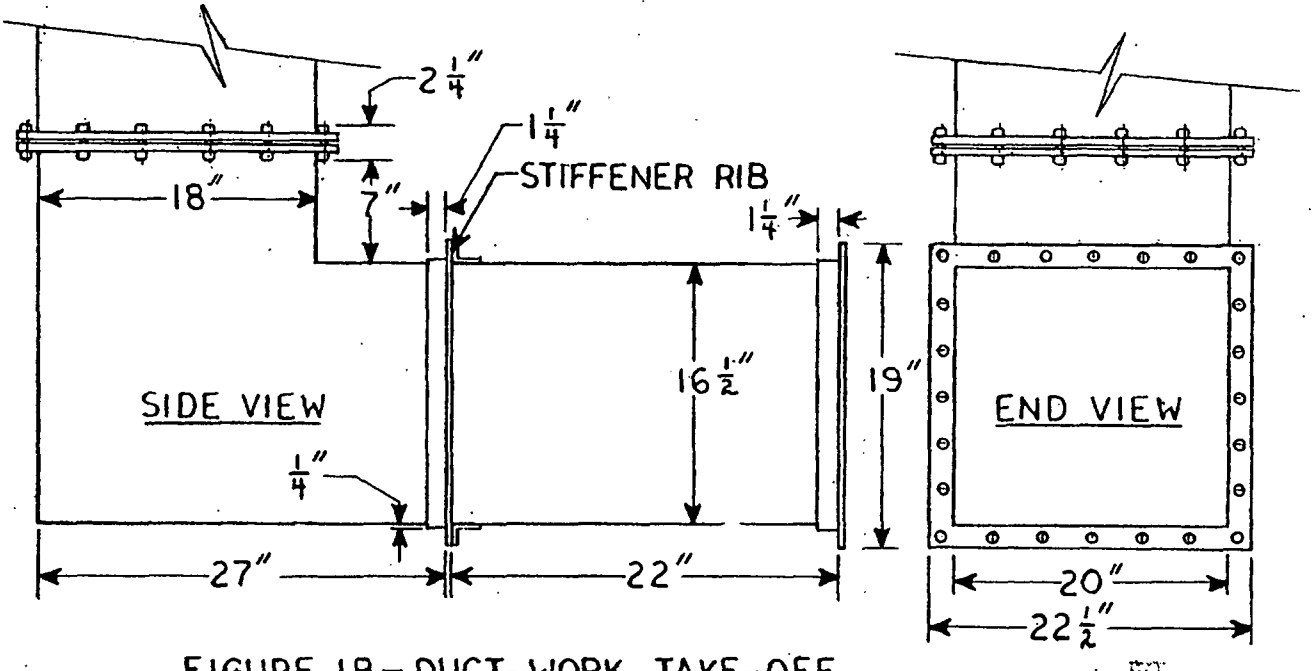


FIGURE 1B - DUCT-WORK TAKE-OFF