



Ford Parts and Service Division
Ford Motor Company

Service Research Center
18751 Oakwood Boulevard
Dearborn, Michigan 48121

July 12, 1977

Mr. E. J. Miklovic
Tempo Products Company
6200 Cochran Road
Cleveland, Ohio 44139

Dear Ed:

This is in reference to the attached brochure describing the Pullman model JB75AV asbestos vacmobile.

The Pullman unit apparently retails for an amount considerably less than our Rotunda asbestos vacuum cleaner. As a result, we are receiving field inquiries regarding performance/features comparison and an explanation for the price variance. We would appreciate your assistance in clarifying the major differences between our Rotunda unit and those of the competition.

Thank you for your usual fine cooperation.

Sincerely,


S. F. Svoboda

cc D. Lemerand
A. N. Updegrove


8004 1799

SCF-FORD-1449

Pullman

**MODEL JB75AV
ASBESTOS VACMOBILE**

MEET OSHA REGULATIONS COVERING ASBESTOS CONTAMINATION WITH THE NEW TRIPLE FILTRATION VACMOBILE

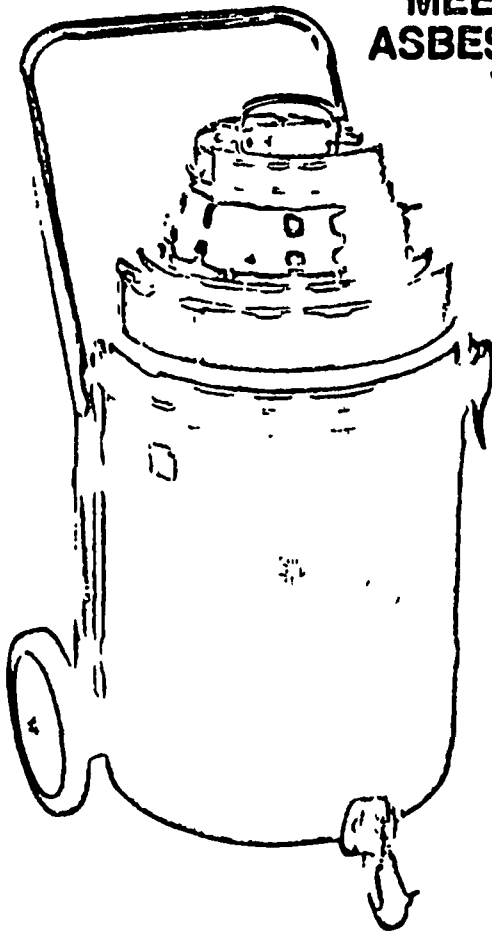

Specifically designed for gas stations, auto dealers, mechanics' shops, or similar locations where asbestos fiber hazards exist. The JB75AV Vacmobile is designed to conform to OSHA regulation # 1910.1001 when used as recommended. This dependable unit utilizes a disposable enclosed paper filter bag in combination with the exclusive Dual Never-Clog filter providing triple filtration of particles. An impermeable, marked, plastic bag is provided for disposal as recommended by OSHA. Two cleaning attachments, a hard bristle brush and a neoprene nozzle, attach to the 15 foot crush-proof hose. This package is ideally suited to help keep work areas clear of dangerous asbestos particles and protect both employees and customers in brake and clutch work areas. Two warning signs are also included for posting in work areas.

8004 1800

SPECIFICATIONS

Motor: 1 H.P. By-Pass Cooling

Capacity: Tank size 16 gals.

Recoverable: 9½ gals. or 1½ bu.

Dimensions: Dia. 16", Ht. 27½"

Net wt. 40 lbs., Ship wt. 50 lbs.,

Standard Equipment: 15' Crush-Proof Hose (1½"

I.D.); Hard Bristle Cleaning Brush;


Neoprene Suction Nozzle, Special

Filtration Paper Filter Bag; Imprinted

Plastic Disposal Bag; Two Warning

Signs.

WARRANTY Motor: 2 years

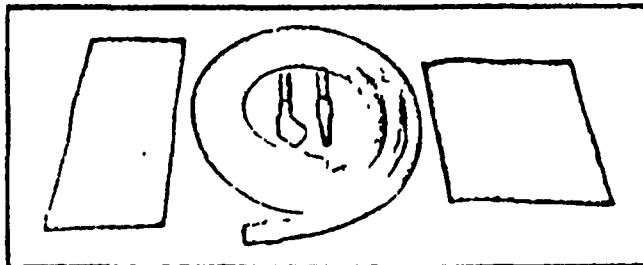

PULLMAN/HOLT PRODUCTS
Division Of Purex Corp.

123 Medford Street
Malden, Ma 02148
617 324 7300
Telex 094 9429

10702 46th Street
Tampa, Fl 33617
813 971 2223
Telex 052-821

9300 Rayo Avenue
Southgate, Ca. 90280
213 564-7954
Telex. 6 74702

BRAKE-VAC®

BRAKE ASSEMBLY CLEANER


Keep your shop clean.

Eliminate harmful and irritative dust from the air.

The new Brake-Vac brake assembly cleaner uses high pressure air to blow all dust and dirt from brake assemblies. Used with a shop vacuum cleaner with an adequate filter, it will meet OSHA requirement 1910.1001.

Keeps your shop clean, eliminates the "fog" of dust associated with cleaning brake assemblies. Saves time — it takes less than 30 seconds to clean each brake assembly.

Vacuum funnel adapter will fit any 1½" or 2½" vacuum cleaner hose.

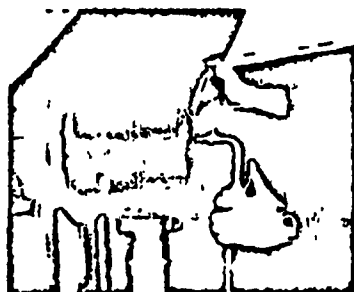


12" Automatic

Part #5101 — Automatic
w/ 9", 10", 11" adapter

Part #5102 — Automatic
Base unit with no adapters

Should be used with air pressure
over 135 lb. at hose end.

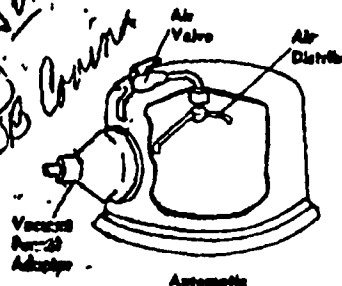


12" Manual

Part #5103 — Manual
w/ 9", 10", 11" adapter

Part #5104 — Manual
Base unit with no adapters

May be used with any air pressure. Use only this model if you have less than 135 lbs. pressure at hose end.

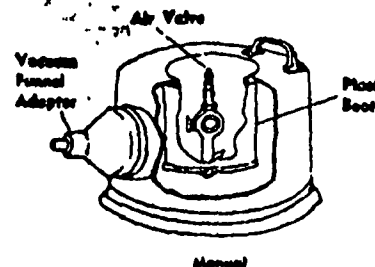

16" Manual

Part #5701 — For use on 16½ or 16" Brakes —
Available manual only.

Part #5715 — Adapter for 15" Brakes

Part #5714 — Adapter for 14" Brakes

Part #5713 — Adapter for 13" Brakes

8004 1801

PQ