March, 1956
2 pages, bleed, B&W
United States Gypsum Company

PLAINTIFF'S EXHIBIT
USG-1358

COTE ACOUSTICAL PLASTER

N. R. C. † UP TO .60


for spray or hand application

RED TOP AUDICOTE is a high-coverage plaster that forms a porous, sound-deadening ceiling surface. It's ideal for machine or trowel application . . . has exceptional bonding qualities.

AUDICOTE lends itself to almost any interior design, including curved contours and smoothly sweeping surfaces. It is recommended where beautifully textured, sound-absorbent, fireproof surfaces are desired.

AUDICOTE can be applied over gypsum basecoat plaster or other ceiling surfaces. It may be given a texture when machine applied; can be stippled, stipple-perforated, darbied, or floated. Satin White AUDICOTE gives light reflectance of .58, and may be spray-painted without appreciable loss of sound absorption.

For more information and details, see Sweet's Architectural Files, section 11/a; contact your U.S.G. Architects' Service Representative or Sales Representative; or write Dept. PA-2, 300 W. Adams St., Chicago 6. (AUDICOTE is also sold by Canadian Gypsum Company, Ltd., Toronto and Montreal.)

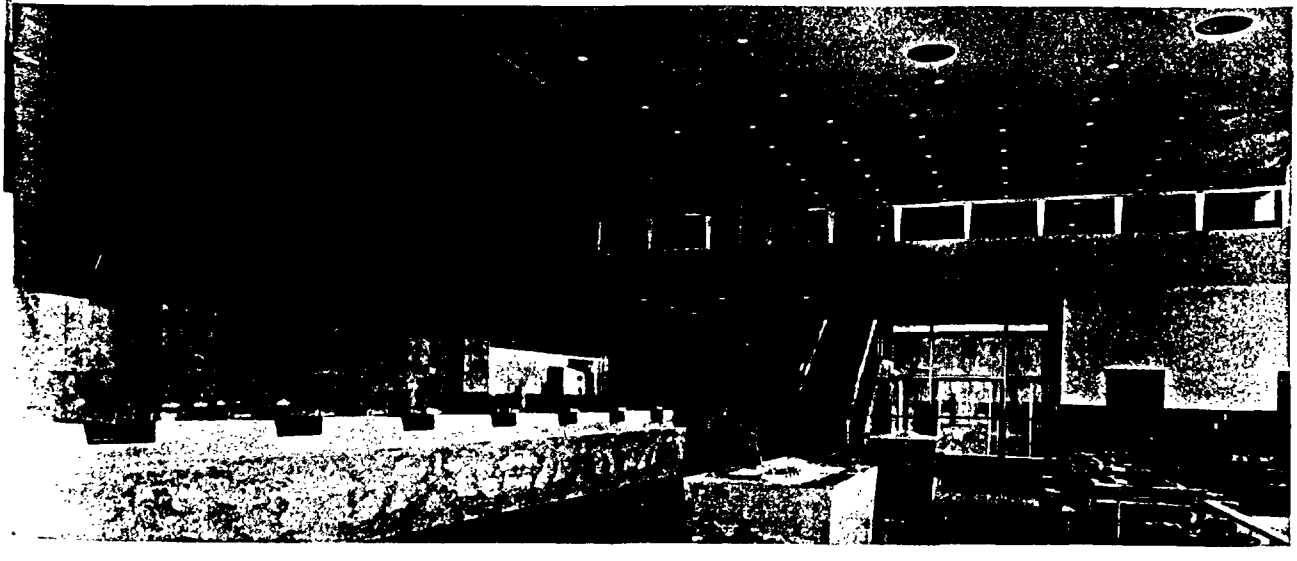

BB019 0131

Advertising . . . CHICAGO