


Mercer University in Atlanta

3000 Flowers Road, South
ATLANTA, GEORGIA 30341

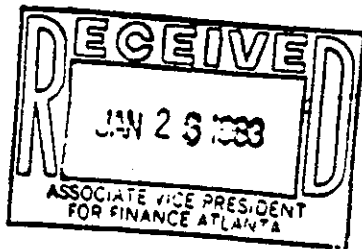

January 25, 1984

W.S. Eikenberry
Director/ Market Service
Gold Bond Building Products
2001 Rexford Road
Charlotte, N.C. 28211

Dear Mr. Eikenberry,

Would you please give us some information concerning the contents of a National Gypsum Co. product called SPRAY-QUICK? The specs are attached.

This product was used in the construction of Atlanta Baptist College, Job #6603, July 15, 1966.

An asbestos removal company has taken samples and has surmised that we may have a significant amount of asbestos in our ceiling finish.

We need to know what amount of asbestos, if any, was in this SPRAY-QUICK finish.

We merged with Mercer University/Macon in 1972 and are now Mercer University/ Atlanta.

A prompt response would be appreciated.

Sincerely,

Steven D. Lazenby
Director/ Physical Plant

Interior Plaster: One coat D & R No. 8014 Vinyl Pigmented Primer-Sealer with one quart D & R mixing liquid added per gallon, and two coats D & R Velour Satin Eggshell Enamel.

Interior Concrete Ceilings: Clean concrete of form oil by using 10% muriatic acid and water solution. Patch voids, air bubbles and minor honeycomb and dry-wall joint compound. Raw metal showing in the slab shall be spot painted with rust-inhibitive primer.

9A-3

9A-06

SCHEDULE OF PAINTING - Continued

Finish coat shall be one spray coat of National Gypsum Co. Spray-Quick perlite aggregate texture finish. Apply this material to cover irregularities in concrete surface caused by misalignment of form joints. Submit 24" x 24" sample board to the Architect for approval of texture prior to application.

9A-07

TOUCHING-UP

At the completion of other branches of the work, all painted work shall be touched up and restored where damaged or defaced, and the entire work left free from blemishes.

9A-08

PAINTING OF PIPING AND CONDUIT

This specification covers a complete paint job on piping in the mechanical equipment rooms, machine rooms, and other service areas of the building where piping is exposed and a complete paint job on all items of mechanical or electrical equipment not factory finished.

9A-09

CLEANING

The contractor shall clean all paint spots, oil and stains, from floors, woodwork, glass, hardware, etc., and leave the entire project in perfect condition upon completion as far as this work is concerned. He shall be responsible for any damage done to other work under this contract and shall, at his own expense, replace any materials which in the opinion of the Architect have become damaged to such an extent that they cannot be restored to their original condition.