



**Brighten Up
Finishes**

HALF PINT

**FLOORLAC
GROUND**

THE SHERWIN-WILLIAMS Co.

PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ETC.

FLOORLAC, GROUND

CONSTITUENTS OF GROUND
By weight: 100%

Composition of Liquid:
Varnish Oil..... 95%
Varnish..... 5%
Diluent..... 100%

Composition of Pigment:
Zinc Oxide..... 10%
Lead Sulphate..... 10%
Color..... 10%
Magnesium Silicate..... 10%
100%

¹Coloring Materials:
Orange, Red, Yellow,
Blue, Green, Black,
and all colors and tints
R10

SHERWIN-WILLIAMS

FLOOR FINISHES

FLOORLAC

FOR FLOORS, FURNITURE, WOODWORK, ETC.

HALF
PINT

GROUND

HALF
PINT

U. S. STANDARD MEASURE

THE SHERWIN-WILLIAMS Co.

PAINT AND VARNISH MAKERS

DIRECTIONS—The surface should be clean and perfectly dry. Stir thoroughly from bottom of can. For first coat on new wood, thin with one quart of pure turpentine and one pint of pure raw linseed oil to each gallon of Floorlac Ground. For second coat and on previously painted surfaces apply the Floorlac Ground as it comes from the can. Floorlac Ground must always be used under Floorlac Dark Oak. It should also be used where any shade of Floorlac is to be applied to a surface which is very dark, irregular in color or has been previously painted. Apply with a brush and spread in thin, even coats. Keep well covered when not in use.

SHERWIN-WILLIAMS
Brighten Up
Finishes

ONE PINT

FLOORLAC
GROUND

THE SHERWIN-WILLIAMS CO.

PAINT AND VARNISH MAKERS
 FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ENG.
 SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES

FLOORLAC, GROUND

CONCENTRATIONS OF SOLIDS
 Pigment by weight..... 53%
 Liquid by weight..... 32%

COMPOSITION OF LIQUID:
 Linseed Oil..... 28%
 Varnish..... 12%
 Drier..... 60%

COMPOSITION OF PIGMENT:
 Zinc Oxide..... 33%
 Lead Subphosphate..... 17%
 Calcium Silicate..... 14%
 Magnesium Silicate..... 24%

COLOURING MATERIAL:
 Ochre..... 100%
 20% Ferric Oxide
 80% Silica and Silicates
 R10

SHERWIN-WILLIAMS
FLOOR FINISHES
FLOORLAC
 FOR FLOORS, FURNITURE, WOODWORK, ETC.

ONE PINT ONE PINT

GROUND

U. S. STANDARD MEASURE

THE SHERWIN-WILLIAMS CO.
 PAINT AND VARNISH MAKERS
 FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ENG.

DIRECTIONS—The surface should be clean and perfectly dry. Stir thoroughly from bottom of can and mix one pint of pure raw linseed oil to each gallon of Floorlac and new wood, this with one quart of pure spirits turpentine and spread in thin, even coats. Keep well covered when not in use. Should also be used where any shade of Floorlac is to be applied to a surface which is very dark. Irregular in color or has been previously painted. Apply with a brush and spread in thin, even coats. Keep well covered when not in use.

MADE IN U. S. A.
 K2890-J-13 208

SHERWIN-WILLIAMS

Brighten Up Finishes

ONE QUART
**FLOORLAC
GROUND**

The SHERWIN-WILLIAMS Co.

PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ENG.
SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES

FLOORLAC, GROUND

Contents of Can:

Pigment by weight..... 65%
Liquid by weight..... 35%

100%

Composition of Liquid:

Linseed Oil..... 28%
Varnish..... 12%
Drier..... 60%

100%

Composition of Pigment:

Zinc Oxide..... 39%
Lead Sulphate..... 23%
*Color..... 14%
Magnesium Silicate..... 24%

100%

*Coloring Material:

Ochre
20% Ferric Oxide
80% Silica and Silicates

R110

SHERWIN-WILLIAMS FLOOR FINISH

FLOORLAC

FOR FLOORS, FURNITURE, WOODWORK

ONE
QUART

GROUND

U. S. STANDARD MEASURE

The SHERWIN-WILLIAMS Co.
PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LO

FLOORLAC GROUND

Contents of Can:

Pigment by weight.....	68%
Liquid by weight.....	32%
	100%

Composition of Liquid:

Linseed Oil.....	28%
Varnish.....	12%
Drier.....	60%
	100%

Composition of Pigment:

Zinc Oxide.....	39%
Lead Sulphate.....	25%
*Color.....	14%
Magnesium Silicate.....	24%
	100%

***Coloring Material:**

Ochre	
20% Ferric Oxide	
80% Silica and Silicates	

R110

SHERWIN-WILLIAMS

FLOOR FINISHES

FLOORLAC

HALF
GALLON



GROUND

HALF
GALLON

U. S. STANDARD MEASURE

THE SHERWIN-WILLIAMS CO.

PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ENG.

SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES

DIRECTIONS:—The surface should be clean and perfectly dry. Stir thoroughly from bottom of can. For first coat on new wood, thin with one quart pure spirits turpentine and one pint pure raw linseed oil to each gallon of Floorlac Ground. For second coat, and on previously painted surfaces apply the Floorlac Ground as it comes from the can. Floorlac Ground must always be used under Floorlac Dark Oak. It should also be used where any additional color is desired. Apply to a surface which is very dark, irregular in color or has been previously painted with a dark color. Apply with a brush and spread in thin, even coat. Keep well covered when not in use.

C296 J12 2/4

MADE IN U. S. A.



HALF GALLON

**FLOORLAC
GROUND**

THE SHERWIN-WILLIAMS Co.

PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ENG.
SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES.

BU295 A14 774

MADE IN U. S. A.

0007-SWP-000328167

FLOORLAC, GROUND

CONTENTS OF CAN:

Pigment by weight..... 63%
Liquid by weight..... 37%

COMPOSITION OF LIQUID:

Linseed Oil 78%
Varnish..... 12%
Drier 60%

COMPOSITION OF PIGMENT:

Zinc Oxide 39%
Lead Sulphate..... 23%
*Color 14%
Magnesium Silicate..... 24%

*COLORING MATERIAL:

Ochre
20% Ferric Oxide
80% Silica and Silicates
R110

SHERWIN-WILLIAMS

FLOOR FINISH

FLOORLAC



U. S. STANDARD MEASURE



THE SHERWIN-WILLIAMS CO.

PAINT AND VARNISH MAKERS

FACTORIES CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ENGLAND
SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES.

V296 J12 266

MADE IN U. S. A.

NOV 25 1913



SHERWIN-WILLIAMS **Brighten Up** **Finishes**

ONE GALLON


Void
FLOORLAC
GROUND

THE SHERWIN-WILLIAMS CO.

PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ENG.
SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES.

B0296

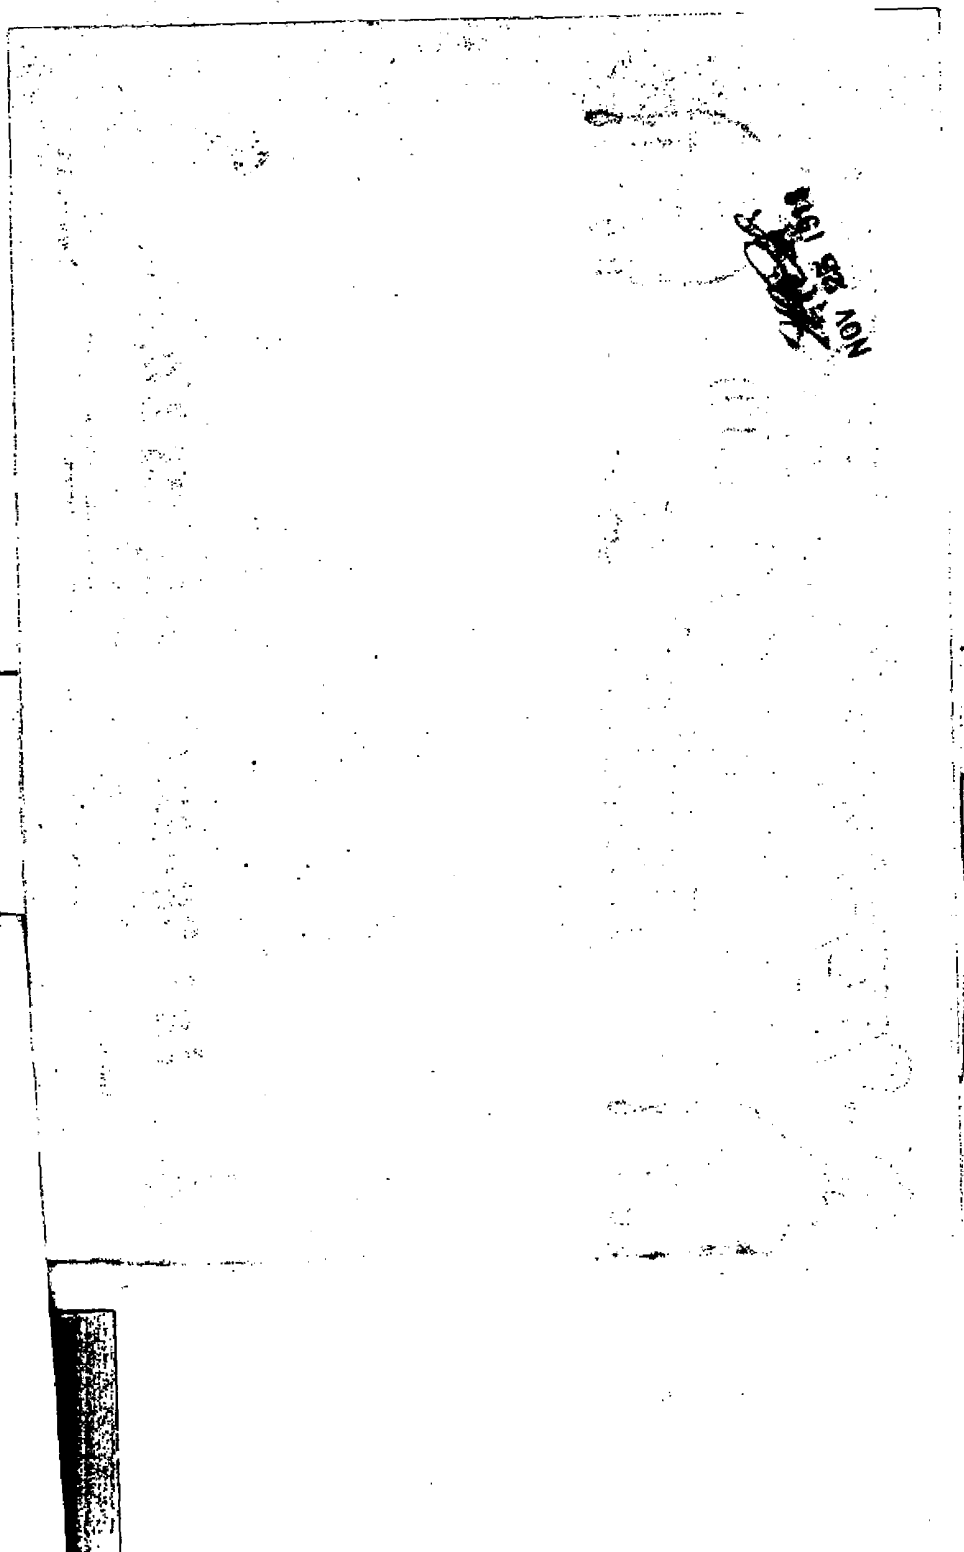


SHERWIN-WILLIAMS
Brighten Up & Finish

**QUARTER PINT
FLOORLAC
GROUND**

THE SHERWIN-WILLIAMS CO.

RECEIVED

FLOORLAC, GROUND			
GRADES OF GUM			
100% GUM	100%	100%	100%
95% GUM	95%	95%	95%
90% GUM	90%	90%	90%
85% GUM	85%	85%	85%
80% GUM	80%	80%	80%
75% GUM	75%	75%	75%
70% GUM	70%	70%	70%
65% GUM	65%	65%	65%
60% GUM	60%	60%	60%
55% GUM	55%	55%	55%
50% GUM	50%	50%	50%
45% GUM	45%	45%	45%
40% GUM	40%	40%	40%
35% GUM	35%	35%	35%
30% GUM	30%	30%	30%
25% GUM	25%	25%	25%
20% GUM	20%	20%	20%
15% GUM	15%	15%	15%
10% GUM	10%	10%	10%
5% GUM	5%	5%	5%
0% GUM	0%	0%	0%





**Brighten Up
Finishes**

**FLOORLAC
GROUND**

THE SHERWIN-WILLIAMS CO.

PAINT AND VARNISH MAKERS
CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ENGL.

FLOORLAC GROUND

Contents of Can:

Paint by weight..... 89%

Liquid by weight..... 11%

Composition of Liquid:

Linseed oil..... 34%

Yankee..... 34%

Petroleum Spirits..... 32%

Composition of Pigments:

Zinc Oxide..... 8%

Lead Oxide..... 8%

Calcium Silicate..... 17%

Other Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%


20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

20% Pure Oxide..... 10%

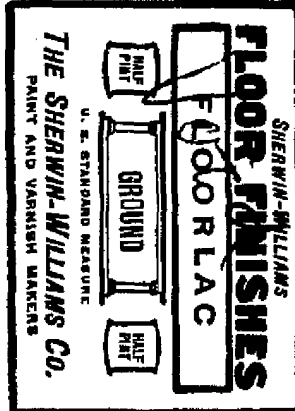

DIRECTIONS—The surface should be clean and perfectly dry. Stir thoroughly from bottom of can. For first coat on new wood, thin with one quart of pure spirits turpentine and one pint of pure raw linseed oil to each gallon of Floorlac Ground. For second coat and on previously painted surfaces apply the Floorlac Ground as it comes from the can. Floorlac Ground must always be used under Floorlac Dark Oak. It should also be used where any shade of Floorlac is to be applied to a surface which is very dark, irregular in color or has been previously painted. Apply with a bristle brush and spread in thin, even coats. Keep well covered when not in use.

SHERWIN-WILLIAMS **Brighten Up** **Finishes**

ONE PINT
FLOORLAC
GROUND

THE SHERWIN-WILLIAMS Co.

PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ENG.
 SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES

FLOORLAC, GROUND

CONTENTS OF CAN:
 Pigment by weight..... 68%
 Liquid by weight..... 32%
 100%

COMPOSITION OF LIQUID:
 Linseed Oil..... 28%
 Varnish..... 12%
 Drier..... 60%
 100%

COMPOSITION OF PIGMENT:
 Zinc Oxide..... 39%
 Lead Sulphate..... 23%
 *Color..... 14%
 Magnesium Silicate..... 24%
 100%

*POLYMERIZING MATERIAL:
 Ochre
 20% Ferric Oxide
 80% Silica and Silicates
 R110

SHERWIN-WILLIAMS **FLOOR FINISH**

FLOORLAC
 FOR FLOORS, FURNITURE, WOOD

ONE
 PINT

GROUND

U. S. STANDARD MEASURE
THE SHERWIN-WILLIAMS Co.
 PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ENG.

303

304

R1

FLOORLAC GROUND

CONTENTS OF CAN:
 Pigment by weight.....68%
 Liquid by weight.....32%
 100%

COMPOSITION OF LIQUID:
 Linseed Oil.....28%
 Varnish.....12%
 Drier.....50%
 100%

COMPOSITION OF PIGMENT:
 Zinc Oxide.....30%
 Lead Sulphate.....23%
 *Color.....14%
 Magnesium Silicate.....34%
 100%

***COLORING MATERIAL:**
 Ochre
 20% Ferric Oxide
 80% Silica and Silicates
 R110

SHERWIN-WILLIAMS

FLOOR FINISHES

FLOORLAC

FOR FLOORS, FURNITURE, WOODWORK, ETC.

HALF
GALLON

GROUND

HALF
GALLON

U. S. STANDARD MEASURE

THE SHERWIN-WILLIAMS CO.

PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ENG.
 SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES

DIRECTIONS:—The surface should be clean and perfectly dry. Stir thoroughly from bottom of can. For first coat on new wood, stir in one quart pure spirits turpentine and one quart of water. For subsequent coats, stir in one quart of water. The Floorlac Ground must always be used under Floorlac Dark Oak. It should also be used where any shade of Floorlac is to be applied to a surface which is very dark, irregular in color or has been previously painted. Apply with a bristle brush and spread in thin even coats. Keep well covered when not in use.

U296 A14 774

MADE IN U. S. A.

**FLOORLAC
GROUND**

Contents of Can:
 Pigment by weight..... 68%
 Liquid by weight..... 32%

100%
 Composition of Liquid:
 Linseed Oil..... 28%
 Varnish..... 12%
 Drier..... 60%

100%
 Composition of Pigment:
 Zinc Oxide..... 39%
 Lead Sulphate..... 23%
 *Color..... 14%
 Magnesium Silicate..... 24%

*Coloring Material: 100%
 Ochre
 20% Ferric Oxide
 80% Silica and Silicates
 R110

SHERWIN-WILLIAMS FLOOR FINISHES

FLOORLAC

FOR FLOORS, FURNITURE, WOODWORK, ETC.



U. S. STANDARD MEASURE

THE SHERWIN-WILLIAMS Co.

PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ENG.
 SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES.

V306 A14 774

MADE IN U.S.A.



Ask for complete varnish list.

ish.

19 860



SHERWIN-WILLIAMS **Brighten Up** **Finishes**

ONE GALLON

FLOORLAC **GROUND**

THE SHERWIN-WILLIAMS CO.

PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ENGLAND.
SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES.

BU294 A14 774

SHERWIN-WILLIAMS

Brighten Up Finishes

ONE PINT GROUND FLOORLAC

For Staining and Varnishing at one operation Floors,
Furniture, Woodwork, Etc.

THE SHERWIN-WILLIAMS CO.

PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ENG.
SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES

FLOORLAC, GROUND

Contents of Can:

Pigment by weight ... 68%
Liquid by weight ... 32%

100%

Composition of Liquid:

Linseed Oil 27%
Varnish 37%
Petroleum Spirits ... 36%

100%

Composition of Pigment:

Zinc Oxide 38%
Lead Sulphate 23%
*Ochre 12%
Silica and Silicates... 27%

100%

*Coloring Material:

Ochre
20% Ferric Oxide
80% Silica and Silicates

Rx 110

SHERWIN-WILLIAMS

FLOOR FINISH

FLOORLAC

FOR FLOORS, FURNITURE, WOODWORK

ONE
PINT

GROUND

U. S. STANDARD MEASUREMENT

THE SHERWIN-WILLIAMS CO.

PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ENG.

SHERWIN-WILLIAMS

Brighten Up Finishes

ONE QUART GROUND FLOORLAC

For Staining and Varnishing at one operation Floors,
Furniture, Woodwork, Etc.

THE SHERWIN-WILLIAMS Co.

PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ETC.
SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES

FLOORLAC, GROUND

Contents of Can:
Fluxant by weight... 64%
Liquid by weight..... 32%

100%
Composition of Liquid:
Liacid Oil..... 27%
Varnish..... 37%
Petroleum Spirits..... 36%

100%
Composition of Pigment:
Zinc Oxide..... 34%
Lead Sulphate..... 23%
Ochre..... 12%
Silica and Silicates..... 27%

100%
Coloring Materials:
Ochre
10% Ferric Oxide
80% Silica and Silicates
Ex 110

SHERWIN-WILLIAMS FLOOR FINIS

FLOORLAC

FOR FLOORS, FURNITURE, WOODWORK



U. S. STANDARD MEASURE

THE SHERWIN-WILLIAMS Co.

PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ETC.

SHERWIN-WILLIAMS Brighten Up Finishes

ONE PINT
FLOORLAC
GROUND

The Sherwin-Williams Co.

PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ENG.
SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES

FLOORLAC, GROUND

CONTENTS OF CAN:

Pigment by weight..... 68%
Liquid by weight..... 32%
100%

COMPOSITION OF LIQUID:

Lined Oil 28%
Varnish..... 12%
Drier 60%
100%

COMPOSITION OF PIGMENT:

Zinc Oxide..... 39%
Lead Sulphate..... 23%
Color..... 14%
Magnesium Silicate..... 24%
100%

COLOURING MATERIAL:

Ochre
80% Ferric Oxide
80% Silica and Silicates
R110

SHERWIN-WILLIAMS

FLOOR FINISH

FLOORLAC

FOR FLOORS, FURNITURE, WOODWORK

ONE
PINT

GROUND



U. S. STANDARD MEASURE

The Sherwin-Williams Co.

PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL

**PORCH AND DECK PAINT
No. 50**

Contents of Can:
Pigment by weight .. 82%
Liquid by weight .. 48%
100%

Composition of Liquid
Linseed Oil .. 84%
Turpentine .. 7%
Japan Drier .. 5%
Water .. 2%
100%

Composition of Pigment:
Zinc Oxide .. 28%
Lead Sulphate .. 18%
Lead Carbonate .. 24%
Magnesium Silicate .. 16%
Color .. 12%
100%

*Coloring Material:
Ochre
20% Ferric Oxide
80% Silica and Silicates
Red Oxide
98% Ferric Oxide
2% Silica and Silicates
Lamp Black
Pure Carbon

SHERWIN-WILLIAMS

FLOOR FINISHES

PORCH & DECK PAINT

FOR OUTSIDE USE

HALF
GALLON

BROWN STONE

50

U. S. STANDARD MEASURE

THE SHERWIN-WILLIAMS CO.

PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ETC.

SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES

INSTRUCTIONS:—The surface should be clean and perfectly dry. Rub thoroughly from bottom of can and brush out in the direction of the grain of the wood. Apply two coats in all weather and three coats in summer. Do not mix a second coat until the first coat is dry. **NEW WORK:**—For fine work, mix the paint with an equal amount of pure raw linseed oil. For heavy work, mix with turpentine. For third coat apply as it comes from the can, adding a little raw linseed oil if necessary. **OLD WORK:**—Remove all loose paint and apply two coats as for new work. If surface is hard, add a little pure spirits turpentine. Apply last coat as it comes from the can if necessary, this slightly with pure raw linseed oil.

MADE IN U. S. A.

1704 C12 1M

***Bone Black**
13% Animal Carbon
88% Calcium Phosphate
and Carbonate

PORCH & DECK PAINT

HALF GALLON	DARK SLATE	51
----------------	------------	----

12. 5. STANDARD FEATURES

THE SHERWIN-WILLIAMS CO.
PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ETC.
SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES

[illegible]

Lamp Black—Pure Carbon

U. S. STANDARD MEASURE

SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES

[illegible]



SHERWIN-WILLIAMS

FLOOR FINISHES

PORCH & DECK PAINT

FOR OUTSIDE USE.

HALF
GALLON

71

HALF
GALLON

U. S. STANDARD MEASURE

The SHERWIN-WILLIAMS Co.

PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL,
LONDON, ETC.

SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES

DIRECTIONS:—The surface should be clean and perfectly dry. Mix thoroughly from bottom of can and brush on.

No. 45

Contents of Can:

Pigment by weight 55%
Liquid by weight. 44%

100%

Composition of Liquid:

Linseed Oil.....	86%
Turpentine	8%
Turpentine Drier..	7%
Water	1%

100%

Composition of Pigment:

Zinc Oxide	81%
Lead Sulphate.....	21%
Lead Carbonate...	81%
Magnesium Silicate	10%
*Color	7%

100%

•Coloring Materials

Chrome Yellow
Lead Chromate.
Ochre
50% Ferric Oxide
80% Silica & Silicates
Umber
10% Manganese Oxide
45% Ferric Oxide
45% Silica & Silicates

SHERWIN-WILLIAMS

FLOOR FINISHES

PORCH & DECK PAINT

FOR OUTDOOR USE

**HALF
GALLON**

CONTINENTAL YELLOW

45

U. S. STANDARD MEASUREMENTS

THE SHERWIN-WILLIAMS CO.
PAINT AND VARNISH MAKERS

PARFUMS: CLEVELAND, CHICAGO, HENRI, MONTREAL,
LONDON, ETC., .
SALES OFFICE AND WHOLESALE IN FRANCE: OFFICE

[illegible]

• • •

**PORCH AND DECK PAINT
No. 46**

Contents of Can:

Pigment by weight	58%
Oil and by weight	42%
	100%

Composition of Liquid:

Linseed Oil	80%
Turpentine	20%
Isopropyl Alcohol	8%
Water	1%
	100%

Composition of Pigment:

Zinc Oxide	32%
Lead Sulphate	21%
Lead Carbonate	39%
Magnesium Silicate	11%
Color	4%
	100%

Coloring Material:

Chrome Yellow	
Pure Lead Chromate	
Lamp Black	
Pure Carbon	
Uchre	
20% Ferric Oxide	
80% Silica and Silicates	

SHERWIN-WILLIAMS FLOOR FINISHES

PORCH & DECK PAINT FOR OUTSIDE USE



U. S. STANDARD MEASURE

THE SHERWIN-WILLIAMS Co.
PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ENG.
SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES



MADE IN U. S. A.

MADE IN U. S. A.

DIRECTIONS—The surface should be clean and perfectly dry. Stir thoroughly from bottom of can and brush out in thin, even coats with a bristle brush, working it well into the pores of the wood. Apply two coats on old work and three coats on new work. Do not apply a succeeding coat until the previous one is perfectly dry, thinning as follows: **NEW WORK**—For first coat thin the paint with an equal amount of pure raw linseed oil. Second coat, add a little turpentine. For third coat apply as it comes from the can, adding a little raw linseed oil if necessary. **OLD WORK**—Remove all loose paint and apply first coat as for new work. If surface is hard add a little pure spirits turpentine. Apply last coat as it comes from the can; if necessary, thin slightly with pure raw linseed oil.

PORCH AND DECK PAINT

No. 45

Contents of Can*

Pigment by weight 50%
Liquid by weight 44%

100%

Composition of Liquid:

Linseed Oil 40%
Turpentine 60%
Turpentine Drier 7%
Water 1%

100%

Composition of Pigments:

Zinc Oxide 31%
Lead Sulphate 21%
Lead Carbonate 31%
Magnesium Silicate 10%
*Color 7%

100%

***Coloring Material:**

Chrome Yellow
Lead Chromate
Ochre 10% Ferric Oxide
80% Silica and Silicates
Umber 10% Manganese Oxide
45% Ferric Oxide
45% Silica and Silicates

SHERWIN-WILLIAMS

FLOOR FINISHES

PORCH & DECK PAINT
FOR OUTSIDE USE

ONE
QUART

CONTINENTAL
YELLOW

45

U. S. STANDARD MEASURE

THE SHERWIN-WILLIAMS CO.

PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ETC.

**PORCH AND DECK PAINT
No. 46**

Contents of Can:
Pigment by weight... 57%
Liquid by weight..... 43%

Composition of Liquid:
100%
Linseed Oil..... 87%
Turpentine..... 4%
Turpentine Drier... 8%
Water..... 1%

Composition of Pigment:
100%
Zinc Oxide..... 32%
Lead Sulphate... 22%
Lead Carbonate... 33%
Magnesium Silicate... 13%
*Color..... 2%

***Coloring Material:**
100%
Chrome Yellow
57% Lead Chromate
18% Lead Sulphate
25% Barium Sulphate
Dekere
20% Ferric Oxide
80% Silica and Silicates
Lamp Black
Pure Carbon

**SHERWIN-WILLIAMS
FLOOR FINISHES**

**PORCH & DECK PAINT
FOR OUTSIDE USE**

HALF
GALLON

LIGHT OLIVE DRAB

46

U. S. STANDARD MEASURE

**THE SHERWIN-WILLIAMS CO.
PAINT AND VARNISH MAKERS**

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL,
LONDON, ETC.
SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES.

THE SHERWIN-WILLIAMS CO. has been manufacturing and distributing paint and varnish for over 100 years. The company is located in Cleveland, Ohio, and has branches in many other cities. The company is known for its high quality products and its excellent customer service. The company's products are used in a wide variety of applications, from residential painting to industrial coatings. The company's reputation for quality and reliability has made it a leading manufacturer in the paint and varnish industry.

**PORCH AND DECK PAINT
No. 47**

Contents of Can:
 Pigment by weight.. 48%
 Liquid by weight . 52%
 100%

Composition of Liquid:
 Linseed Oil . . . 86%
 Turpentine . . . 6%
 Japan Vimer . . . 7%
 Water . . . 1%
 100%

Composition of Pigment:
 Zinc Oxide . . . 30%
 Lead Carbonate . . 19%
 Lead Sulphate... 7%
 Magnesium Silicate 19%
 *Color . . . 25%
 100%

*Coloring Material:
 Ochre
 20% Ferric Oxide
 50% Silica and Silicates
 Chrome Yellow
 70% Lead Chromate
 24% Lead Sulphate
 Under
 12% Zinc Oxide
 8% Lead Oxide
 40% Silica and Silicates

SHERWIN-WILLIAMS

FLOOR FINISHES

PORCH & DECK PAINT
FOR OUTSIDE USE

HALF
GALLON

DEEP BUFF

47

U. S. STANDARD MEASURE

The Sherwin-Williams Co.
PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ENG.
 SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES

DIRECTIONS:—The quantity of paint required for any surface may be determined by the following table. The quantity of paint required for any surface may be determined by the following table. The quantity of paint required for any surface may be determined by the following table.

PORCH AND DECK PAINT

No. 48

Contents of Can

Pigment by weight	56%
Lead by weight	44%

Composition of Liquid

Linseed Oil	87%
Turpentine	6%
Japan Drier	6%
Wash	1%

Composition of Pigment

Zinc Oxide	32
Lead sulphate	30
Lead carbonate	30
Magnesium bicarbonate	11
*Color	2

*Coloring Material

Golden Oxide
11% Ferric Oxide
3% Lead Chromate
37% Calcium Sulphate
49% Soda and Salts

Red Oxide
98% Ferric Oxide
2% Soda and Salts

Lamp Black
Pure Carbon

SHERWIN-WILLIAMS

FLOOR FINISHES

PORCH & DECK PAINT

FOR OUTSIDE USE

**HALF
GALLON**

GRAY STONE

48

U. S. STANDARD MEASURE

THE SHERWIN-WILLIAMS CO.
PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, OHIO; NEWARK, MONTREAL, LONDON, ENG.
SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES

DIRECTIONS: The motion should be cheap and perfectly dry. Six-thoroughly clean bottoms of cans and brush on the inside, round ends with a fine brush, working it well into the pores of the wood. Apply five coats on old stock and three on new. The surface should be perfectly smooth and free from all dirt and grease. The motion should be perfectly dry. The surface should be perfectly smooth and free from all dirt and grease. The motion should be perfectly dry. The surface should be perfectly smooth and free from all dirt and grease.

THE NEW

**PORCH AND DECK PAINT
No. 49**

Contents of Can:
Pigment by weight . . . 57%
Liquid by weight . . . 43%

Composition of Liquid:
Linseed Oil . . . 91%
Turpentine . . . 9%
Japan Drier . . . 6%
Water . . . 1%

Composition of Pigment:
Zinc Oxide . . . 31%
Lead Sulphate . . . 22%
Lead Carbonate . . . 24%
Magnesium Silicate . . . 11%

Tinted with Carbon and
Ultra Blue

SHERWIN-WILLIAMS

FLOOR FINISHES

PORCH & DECK PAINT
FOR OUTSIDE USE

HALF
GALLON

LIGHT GRAY

49

U. S. STANDARD MEASURE

THE SHERWIN-WILLIAMS CO.
PAINT AND VARNISH MAKERS

PORTLAND: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ETC.
SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES

DIRECTIONS:—The surface should be clean and perfectly dry. The thoroughly flayed surface of new and brackish
In fact, even when used with a bristle brush, working it with long hair into the pores of the wood. Apply two coats and
brush on with a brush. Do not apply a second coat until the previous one is perfectly dry. Shading as desired.
These two coats should be applied, and for third coat apply as in second coat, adding a little more brush oil if
needed. **OLD WORK:**—Remove all loose paint and sand as far as you can. If surface is hard, add a 20% sand
medium. Apply two coats as in second coat and sand as far as you can. If necessary, this slightly with sand and brush oil
medium. **MADE IN U.S.A.**

INSIDE FLOOR PAINT
No. 488

Contents of Can:
pigments by weight... 53%
Liquid by weight... 45%

Composition of Liquid:

Composition of Liquors.	
Linseed oil.....	40%
Vinylidich	33%
Latex	25%
Water	1%
	100%

Composition of Pigments

Zinc Oxide	99.5
Lead Carbonate	98.4
Manganese Silicate	28.5
Color	185
	100.0

Coloring Material:

Coloring Materials:

Oxide	
50% Ferric Oxide	
80% Silica and Silicate	
Red Oxide	
31% Ferric Oxide	
15% Silica and Silicate	
41% Calcium Sulfate	
11% Calcium Carbonate	

SHERWIN-WILLIAMS
FLOOR FINISHES

INSIDE FLOOR PAINT
FOR INSIDE USE ONLY



V. 4. STANDARD MEASURE

THE SHERWIN-WILLIAMS CO.
PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, AND
SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES

[illegible]

Sales No. 1.
Continued

Nov. 1, 190

LOWY



SHERWIN-WILLIAMS **Brighten Up** **Finishes**

HALF GALLON

LIGHT TAN **INSIDE FLOOR PAINT**

Made expressly for Inside Floors. Is easily applied, dries over night with
and stands hard wear.

THE SHERWIN-WILLIAMS CO.

PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON
SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES.

BC37

Accounting No. 8

8th: See Accounting No. 4

DIRECTIONS—The floor should be clean and thoroughly dry. Open the package and pour off the liquid at the top into another vessel. Stir the pigment thoroughly from the bottom of the can, after which add the liquid, in 10% increments, until all has been returned to the paint. Immediately stirring constantly. Stir the pigment thoroughly from the bottom of the can, after which add the liquid, in 10% increments, until all has been returned to the paint. Immediately stirring constantly. Stir the pigment thoroughly from the bottom of the can, after which add the liquid, in 10% increments, until all has been returned to the paint. Immediately stirring constantly.

SHERWIN-WILLIAMS FLOOR FINISHES

INSIDE FLOOR PAINT
 FOR INSIDE USE ONLY



U. S. STANDARD MEASURE

THE SHERWIN-WILLIAMS CO.
 PAINT AND VARNISH MAKERS
 FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ETC.
 SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES.

MAD IN U.S.A.

INSIDE FLOOR PAINT No. 376

Contents of Can:
 Pigment by weight... 40%
 Liquid by weight... 60%

Composition of Liquid:
 Linseed Oil... 40%
 Varnish... 32%
 Turpentine... 27%
 Water... 1%

Composition of Pigment:
 Zinc Oxide... 13%
 Lead Oxide... 13%
 Manganese Dioxide... 10%
 *Others... 64%

*Others:
 20% Potash Chloride
 80% Silica and Silicates



SHERWIN-WILLIAMS **Brighten Up** **Finishes**

ONE GALLON

YELLOW **INSIDE FLOOR PAINT**

Made expressly for Inside Floors. Is easily applied, dries over night with
and stands hard wear.

THE SHERWIN-WILLIAMS CO.
PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON,
SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES.

BUN H10 2008

SHERWIN-WILLIAMS Brighten Up Finishes

ONE PINT
YELLOW
INSIDE FLOOR PAINT

Made expressly for inside floors. Is easily applied, dries overnight, with a good gloss, and stands hard wear.

THE SHERWIN-WILLIAMS CO.
PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ENG.
SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES

INSIDE FLOOR PAINT No. 376

CONTENTS OF CAN:
Pigment by weight..... 49%
Liquid by weight..... 51%

COMPOSITION OF LIQUID:
Linseed Oil..... 49%
Volatile..... 51%

COMPOSITION OF PIGMENT:
Yellow Ochre..... 49%
Magnesia Silicate..... 51%

*COLORING MATERIAL:
1 lb. tin
2 1/2 lb. Pink Ochre
2 1/2 lb. Lead Sulphate
1 lb. Zinc Oxide
1 lb. Lead Chromate
1 lb. Lead Sulphate
1 lb. Barium Sulphate

SHERWIN-WILLIAMS FLOOR FINISH

INSIDE FLOOR PAINT
FOR INSIDE USE ONLY

ONE
PINT

YELLOW

U.S. STANDARD MEASURE



THE SHERWIN-WILLIAMS CO.
PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LON

**INSIDE FLOOR PAINT
No. 378**

Contents of Can:

Pigment by weight.. 46%
Liquid by weight... 54%
100%

Composition of Liquid:

Linseed Oil 36%
Varnish 33%
Japan 30%
Water 1%
100%

Composition of Pigment:

*Color..... 36%
Magnesium Silicate.. 20%
Zinc Oxide 21%
Lead Sulphate..... 14%
100%

***Coloring Material:**

Ochre
20% Ferric Oxide
80% Silica and Silicates
Chrome Yellow
50% Lead Chromate
40% Lead Sulphate
10% Barium Sulphate

SHERWIN-WILLIAMS

FLOOR FINISH

INSIDE FLOOR PAINT
FOR INSIDE USE ONLY

HALF
GALLON

YELLOW

3

U. S. STANDARD MEASURE



The Sherwin-Williams Co.

PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON.
 SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES



SHERWIN-WILLIAMS **Brighten Up** **Finishes**

HALF GALLON

MAROON **INSIDE FLOOR PAINT**

Made expressly for Inside Floors. Is easily applied, dries over night with a good
and stands hard wear.

THE SHERWIN-WILLIAMS Co.

PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, ENG.
SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES.

507y Gg. 1946

**INSIDE FLOOR PAINT
No. 451**

Contents of Can:
 Pigment by weight... 41%
 Liquid by weight... 59%
 100%

Composition of Liquid:
 Linseed Oil... 40%
 Varnish... 32%
 Japan... 22%
 Water... 4%
 100%

Composition of Pigment:
 *Color... 84%
 Magnesium Silicate... 16%
 100%

***Coloring Materials:**
 Chrome Yellow
 37% Lead Chromate
 18% Lead Sulphate
 25% Barium Sulphate
 Chrome Green
 7% Lead Chromate
 2% Lead Sulphate
 72% Barium Sulphate
 16% Kanlin
 3% Ferric Ferro Cyanide
 Ochre
 20% Ferric Oxide
 80% Silica and Silicates
 Bone Black
 12% Animal Carbon
 88% Calcium Phosphate
 and Carbonate

SHERWIN-WILLIAMS

FLOOR FINISHES

INSIDE FLOOR PAINT

FOR INSIDE USE ONLY

HALF
GALLON

MOSS GREEN

4

U. S. STANDARD MEASURE



THE SHERWIN-WILLIAMS Co.
 PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON, E.
 SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES



SHERWIN-WILLIAMS **Brighten Up** **Finishes**

HALF GALLON

MOSS GREEN **INSIDE FLOOR PAINT**

Made expressly for Inside Floors. Is easily applied, dries over night with a
and stands hard wear.

THE SHERWIN-WILLIAMS Co.

PAINT AND VARNISH MAKERS

FACTORIES: CLEVELAND, CHICAGO, NEWARK, MONTREAL, LONDON.
SALES OFFICES AND WAREHOUSES IN PRINCIPAL CITIES.

BUSY H10 2025