"HYPALON" LAMINATE JACKET

2.4 The amount of the longitudinal overlap shall be determined by the O.D. of the line covering, but it shall not be less than 1-1/2 inches.

2.4a P.C. 10" O.D. and less shall have a longitudinal lap of 1-1/2 inches.

2.4b P.C. over 10" O.D. up to and including 16" shall have a longitudinal lap of 2 inches.

2.4c P.C. over 16" O.D. shall have a 2-1/2 inch longitudinal lap.

3. CIRCUMFERENTIAL LAP

3.1 The application of the "Hypalon" jacket shall start at the lowest point of the piping system. See figure 10 A.

3.2 After the first sheet has been applied each succeeding sheet shall overlap the preceeding one and fit tight around it.

3.2a The overlapping edge shall be down thus preventing water from getting inside the jacket through the circumferential laps as shown in figure 10 B.

FIG. 10 A

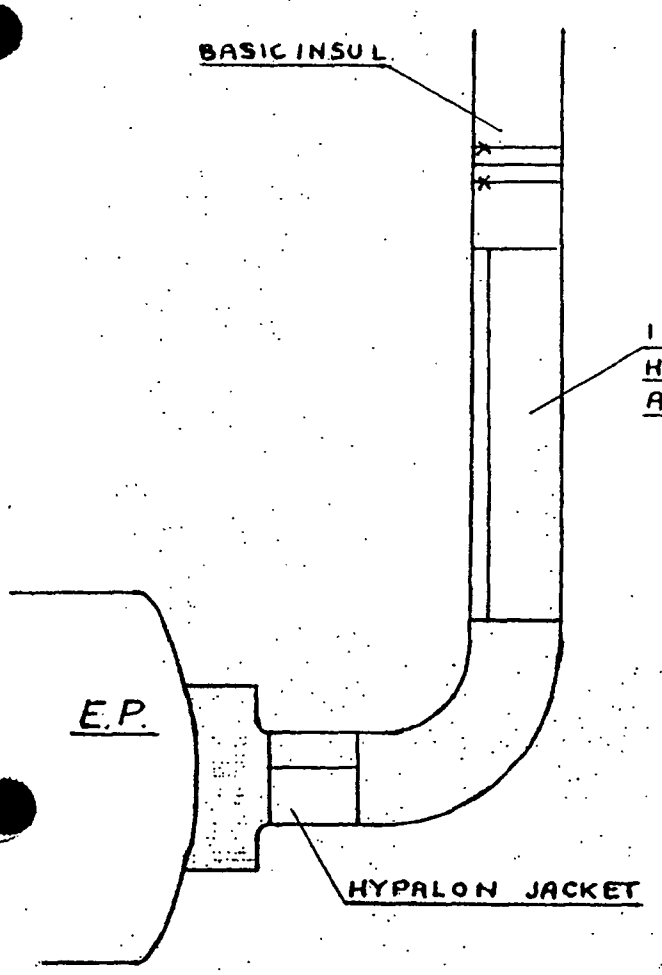

FIG. 10 B

