

# LEAD INDUSTRIES ASSOCIATION

430 LEONHUTON AVENUE

NEW YORK 17, N. Y.

METALLIC LEAD PRODUCTS DIVISION

*per Chem. & Metall. Bull. No. 52*

June 1, 1953

LEAD CHEMICAL CONSTRUCTION  
BULLETIN NO. 7

SUBJECT: LEAD AND LEAD  
ALLOYS

Attached is a reprint from "Chemical Engineering," February, 1953, entitled "Lead and Lead Alloys." It covers the corrosion resistance of these materials of construction to more than 188 commercial corrosives with details about the forms available, fabrication methods and applications in the chemical process industries.

This is the latest and most comprehensive list of corrosives with data on the performance of lead.

As long as our supply lasts we will be pleased to send you additional copies for distribution to those whom you feel may benefit. As similar material becomes available, we will send it on to you so that it may be added to the series.

Very truly yours,

*Robert L. Ziegfeld*

Robert L. Ziegfeld  
Secretary



## The Corrosion Forum

Edited by Morgan H. Weaver

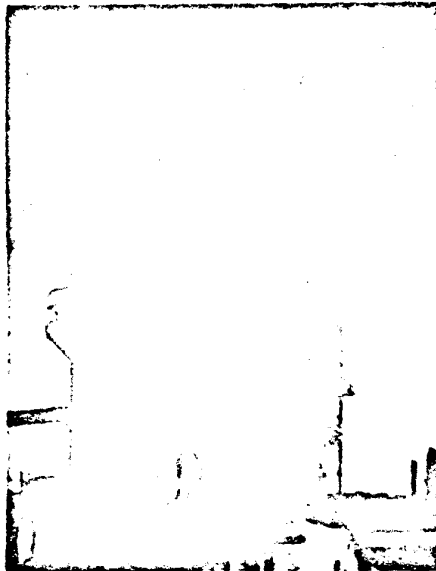


Fig. 1—SHEET LEAD supported in steel framework

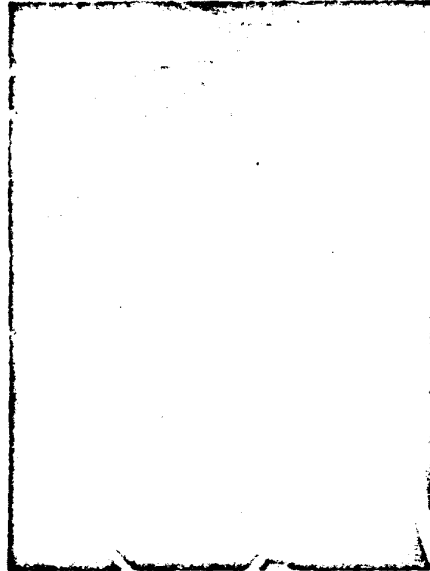


Fig. 2—LEAD PIPE in the form of coils

### Lead and Lead Alloys

The corrosion resistance of these materials of construction to a number of corrosives, with forms available, fabrication, and applications in the CPL.

KEMPTON H. BOLL

Lead Industries Association, New York, N. Y.

More than one-third of the lead consumed each year in the United States is used for the prevention of corrosion.

Lead and many of its alloys are widely used in the construction of equipment for the production, transmission, storage and use of a variety of corrosive chemicals. Despite the development of other materials to compete with lead in these applications, its use for corrosives handling has continued to expand. This is partly due to the inherent desirable characteristics of lead as a corrosion resistant material, but it is also due to the experience gained from long

and varied use of lead in this field. This experience has taught where and how lead may be used to best advantage and has resulted in improvements in construction and installation methods which have kept pace with

#### Specifications\*

|           | Chemical<br>Lead | Acid<br>Lead | Copper<br>Lead |
|-----------|------------------|--------------|----------------|
| Ag max.   | 0.010            | 0.005        | 0.010          |
| Cu max.   | 0.005            | 0.005        | 0.010          |
| Fe max.   | 0.005            | 0.005        | 0.010          |
| As max.   | 0.005            | 0.005        | 0.010          |
| Pb min.   | 99.99            | 99.99        | 99.99          |
| Lead min. | 99.99            | 99.99        | 99.99          |

\* A. S. T. M. Standard Designation (D 38-47) for lead.

Reprinted from Chemical Engineering, February 1952  
Copyright 1952, McGraw-Hill Publishing Co., Inc.  
All Rights Reserved, New York 20, N. Y.

developments in the chemical process industries.

Leads generally specified for chemical construction are chemical lead, acid lead or copper lead. They contain small percentages of silver and copper which have been found to add to the corrosion resistance of lead and to improve its creep and fatigue resistance.

#### CORROSION RESISTANT ALLOYS

**Antimonial Lead**—Antimonial or hard lead is lead generally containing from 1 to 12 percent antimony, usually about 6 to 8 percent. Antimony hardens and improves lead's physical characteristics up to about the boiling point of water. However, it lowers the melting point and, while it may not detract from lead's corrosion resistance, seldom does it improve it.

**Tellurium Lead**—Tellurium lead is chemical lead to which has been added about 0.04 percent tellurium. In extruded lead products, the presence of tellurium retards grain growth and increases fatigue resistance. Corrosion

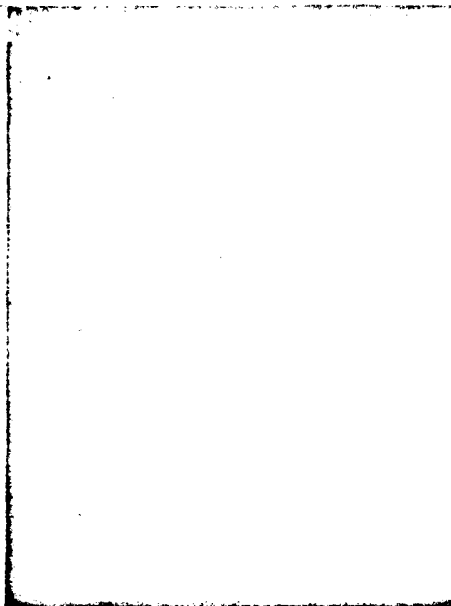


Fig. 3—CAST LEAD (8 percent antimonial lead)

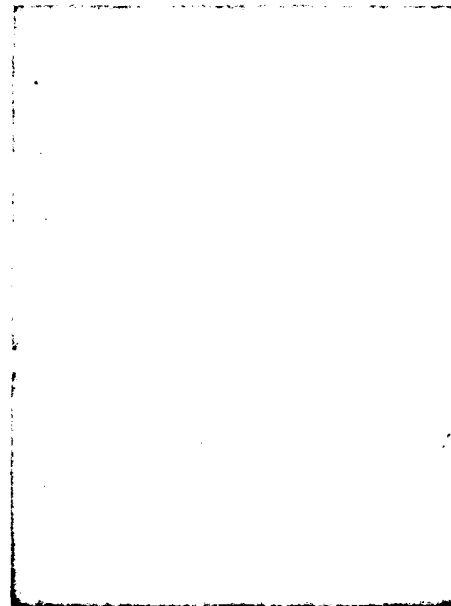


Fig. 4—LEAD CLADDING bonded directly to steel

resistance is comparable to chemical lead and in some instances is superior.

**Other Alloys**—These are several other lead base alloys that have been developed for handling special corrosives or for meeting special conditions of exposure. These include tellurium antimonial lead, 7 percent tin lead, calcium lead and others containing silver or other elements in fractional percentages. A number of these are proprietary and should be used in accordance with the recommendations of their manufacturers.

#### FORMS

**Rolled Lead Products**—Among the most generally useful lead and lead alloy products are those produced by cold rolling. Sizes may range in thickness from foil 0.00015 in. thick, to sheet 2 in. thick or more, and may be rolled to any desired thickness. Sheet

#### Sheet Lead Weight and Thickness

| Approx. Lb.<br>Per Sq. Ft. | Thickness<br>in. | Approx. Lb.<br>Per Sq. Ft. | Thickness<br>in. |
|----------------------------|------------------|----------------------------|------------------|
| 1.5                        | 0.001            | 1.5                        | 0.001            |
| 1.5                        | 0.002            | 1.5                        | 0.002            |
| 1.5                        | 0.003            | 1.5                        | 0.003            |
| 1.5                        | 0.004            | 1.5                        | 0.004            |
| 1.5                        | 0.005            | 1.5                        | 0.005            |
| 1.5                        | 0.006            | 1.5                        | 0.006            |
| 1.5                        | 0.007            | 1.5                        | 0.007            |
| 1.5                        | 0.008            | 1.5                        | 0.008            |
| 1.5                        | 0.009            | 1.5                        | 0.009            |
| 1.5                        | 0.010            | 1.5                        | 0.010            |
| 1.5                        | 0.012            | 1.5                        | 0.012            |
| 1.5                        | 0.015            | 1.5                        | 0.015            |
| 1.5                        | 0.020            | 1.5                        | 0.020            |
| 1.5                        | 0.025            | 1.5                        | 0.025            |
| 1.5                        | 0.030            | 1.5                        | 0.030            |
| 1.5                        | 0.035            | 1.5                        | 0.035            |
| 1.5                        | 0.040            | 1.5                        | 0.040            |
| 1.5                        | 0.045            | 1.5                        | 0.045            |
| 1.5                        | 0.050            | 1.5                        | 0.050            |
| 1.5                        | 0.060            | 1.5                        | 0.060            |
| 1.5                        | 0.070            | 1.5                        | 0.070            |
| 1.5                        | 0.080            | 1.5                        | 0.080            |
| 1.5                        | 0.090            | 1.5                        | 0.090            |
| 1.5                        | 0.100            | 1.5                        | 0.100            |
| 1.5                        | 0.125            | 1.5                        | 0.125            |
| 1.5                        | 0.150            | 1.5                        | 0.150            |
| 1.5                        | 0.175            | 1.5                        | 0.175            |
| 1.5                        | 0.200            | 1.5                        | 0.200            |
| 1.5                        | 0.250            | 1.5                        | 0.250            |
| 1.5                        | 0.300            | 1.5                        | 0.300            |
| 1.5                        | 0.350            | 1.5                        | 0.350            |
| 1.5                        | 0.400            | 1.5                        | 0.400            |
| 1.5                        | 0.450            | 1.5                        | 0.450            |
| 1.5                        | 0.500            | 1.5                        | 0.500            |
| 1.5                        | 0.600            | 1.5                        | 0.600            |
| 1.5                        | 0.700            | 1.5                        | 0.700            |
| 1.5                        | 0.800            | 1.5                        | 0.800            |
| 1.5                        | 0.900            | 1.5                        | 0.900            |
| 1.5                        | 1.000            | 1.5                        | 1.000            |

lead weighs approximately 1 lb. per sq. ft. for each 0.1 in. of thickness.

Sheets may be produced in widths up to 10 ft. and lengths up to 60 ft. depending upon thickness, but 10 ft. wide and 20 ft. long is usually considered standard. Lead sheets are available as strips or ribbons of various widths such as 12, 18 or 24 in.

Fig. 1 is an electrolytic precipitator for suppressing sulphuric acid mists. It is constructed entirely of sheet lead in a steel framework.

**Extruded Lead Products**—Lead and most of its alloys may readily be fabricated by the extrusion process. Joints may be made by welding, soldering or mechanically—the choice depending upon the use to which the pipe is put. Sizes may range from fine tubing 6 in. inside diameter and even less, to 12 in. or larger pipe, with almost any desired wall thickness. Either pure lead or alloys may be used. Fig. 2 illustrates how lead pipe is used as casing for casting hot acid liquors. Note the cage or basket type vessel construction.

**Cast Lead Products**—Lead and castings of its alloys are excellent for castings providing high strength is not a requisite and they are not for use at temperatures higher than the melting

point of the alloy. Casting qualities are excellent, the melting temperatures low, and corrosion resistance

#### Lead Products Commonly Used in Chemical Construction

Sheet lead  
Bonded lead lined pipe  
Bonded (cladding) (leadings)  
Cast lead valves, fittings and flanges  
Castings  
Lead coatings  
Extruded lead pipe  
Extruded lead lined pipe  
Lead covered pipe  
Lead lined valves, fittings and flanges  
Lead rivets  
Lead wire  
Lead wool  
Pipe  
Sheet  
Various extrusions  
Various perforations  
Bulbous caps and traps  
Extruded corrugates  
Lead covered copper extrusions  
Flanges  
Flaring and sealing rolls  
Lead extruders  
Laboratory fittings  
Shipping containers  
Bricks and traps

#### Typical Lead Protected Equipment Used in the CPI

Acid tanks  
Acid storage  
Corrosion resistant prefabricated  
Pipes  
Lead on steel or plate and frame  
Lead on vertical ducts  
Lead on tanks  
Lead on walls  
Lead on roofs  
Lead on floors  
Lead on foundations  
Lead on structural  
Lead on equipment

[illegible]

### Corrosion Resistance of Lead and Lead Alloys, cont...

[illegible]

### Corrosion Resistance of Lead and Lead Alloys, cont . . .

[illegible]

## Corrosion Resistance of Lead and Lead Alloys, cont. . .

[illegible]





mixed corrosives), corrosion resistance is significantly reduced.

Dilute nitric acid is an example of a corrosive which reacts with lead to form a soluble salt. It is also capable of reacting with lead sulphate to reduce its function as a protective coating depending upon the concentration. Obviously where lead linings are protected by a brick lining, the protective film will not be disturbed.

In the case of corrosives which, in themselves, do not readily form a protective film and will not dissolve lead sulphate, it is often possible to make the lining corrosion proof by swabbing the lead with dilute sulphuric acid or filling the vessel with dilute sulphuric acid for a short period of time to establish a protective sulphate film.

At 70 deg. F. in 25 to 35 percent sulphuric acid, chemical lead will form a complete sulphate film in from 9 to 10 hr. Under the same conditions 9

percent antimonial lead forms a sulphate film in from 1 to 14 hr.

Lead generally has good resistance to neutral solutions where lead carbonate and possibly oxide are corrosion products, and fair resistance to alkaline solutions in which these are soluble. Experience has shown that lead is commercially resistant to chromic, sulphuric, sulphurous and phosphoric acids, that it is subject to corrosion at somewhat higher ratios by hydrochloric and hydrofluoric acids, and that it is susceptible to being strongly corroded by acetic, formic and nitric. Nitric solutions are moderately corrosive. Carbonates are not.

### PERFORMANCE WITH CONSCIOUS

Among the many variables determining the suitability of lead or any other material may be temperature, concentration, grade of lead or type of alloy, rate of flow, presence of oxygen, degree of abrasion-erosion and presence of impurities. A careful evaluation of these factors is a prime requisite before selecting or rejecting any material.

When comparisons are being made between corrosive resistant materials, the corrosion rate data should be carefully interpreted because use of either the rate of penetration or rate of weight loss as a corrosion measure can be misleading. For example, at a given rate of penetration the greater thickness of a lead lining obviously means a longer service life than could be expected from a thinner material of construction. Similarly, when corrosion is based on weight loss the high

density of lead should be kept in mind. What might appear as excessive corrosion expressed in lead weight loss would be a nominal rate in terms of volume loss or penetration.

Actually with most corrosives a specific corrosion rate for lead is often a hypothetical figure since the protective film which forms on contact usually results in a high initial rate of corrosion but once the film has developed, the corrosion rate slows down to a practically negligible figure.

The data given on the charts herewith is indicative of the performance of lead in contact with various corrosive chemicals. Since operating conditions vary widely, it is usually wise to use actual exposure tests made under operating conditions to forecast performance in a specific application. However, corrosion rates based on actual plant tests conducted under operating conditions do not necessarily represent the highest concentrations or temperatures under which lead would serve satisfactorily. It is reasonable to expect the corrosion rate to decrease at lower temperatures and, in most cases, lower concentrations.

## REFERENCES

- Cherry, H. M. "Corrosion Handbook," John Wiley & Sons, New York, 1954.
- Lee, J. A. "Materials of Construction for Chemical Process Industries," McGraw-Hill, New York, 1954.
- Radhak, R. "Corrosion Guide," Elsevier Publishing Co. Inc., New York, 1951.
- "Materials of Construction," 1955 Biennial Report, Chemical Engineering, New York, 1955.
- Radl, Kenneth M. "Lead in Modern Chemical Construction," Chemical Engineering, New York, 1955.
- Radl, Kenneth M. "Physical and Chemical Characteristics of Lead in the Chemical Industry," Chemical Engineering, New York, 1955.
- Radl, Kenneth M. "Lead in the Chemical Industry," Chemical Engineering, New York, 1955.
- Radl Development Co., Bensenville, Ill.

### Processes With Which Land or Land Protected Equipment May Be Used

[illegible]

Distributed by  
Lead Industries Association  
420 Lexington Avenue  
New York 17, N. Y.