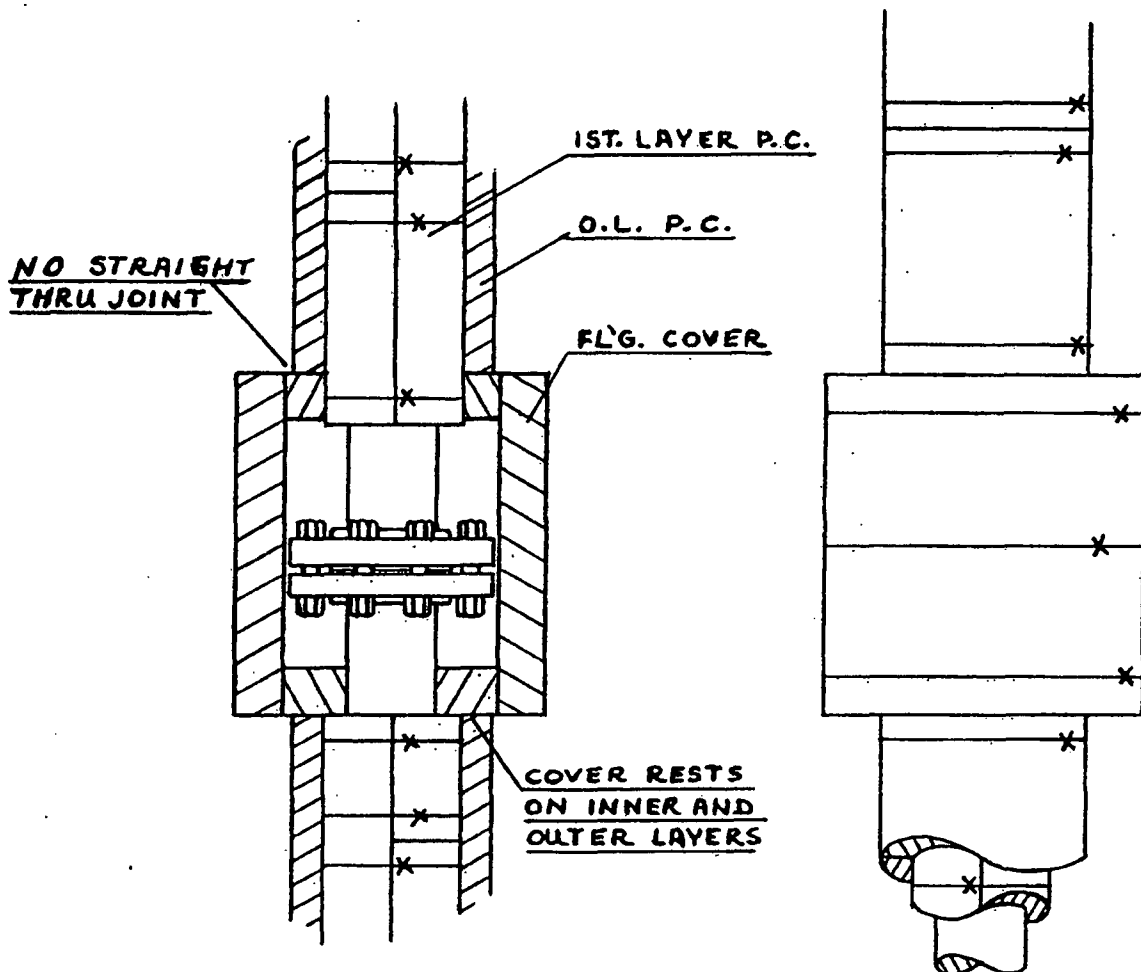


D.L. APPLICATIONFIG. 102PERMANENT FL'G'D. JOINT COVER

F 2.2 FLANGED JOINT - With dow jumpers

2.2a This type of cover is applied in conjunction with the 1st layer P.C. the same as a flange without dow jumpers so the application of the O.L. P.C. will be the same as shown in Figure 102.

F 2.3 VALVES - JACKETED

2.3a Box covers for vertical jacketed valves shall be applied in conjunction with the 1st and O.L. P.C. the same as those for horizontal jacketed valves as described in Paragraph F 1.2a, b, c & d and Figures 100A & B and 101.

F 3 PORTABLE COVERS - VERTICAL & HORIZONTAL

F 3.1 FLANGED FITTINGS - With or without dow jumpers

3.1a Portable covers - Figures 66 thru 71 are applied with both ends overlapping the 1st layer P.C.

3.1b The application of vertical covers is shown in Figures 73A & B and for horizontal covers in Figures 74A, B & C.