

MCGRAW CONSTRUCTION CO., INC.

ASBESTOS EXPOSURE CONTROL

PURPOSE:

1. To protect the health of McGraw employees by eliminating or controlling asbestos exposure.
2. To maintain compliance with the OSHA Asbestos Standards, CFR 1910.1001 and 1926.58.
3. State procedures and policies which should be used on the job when there is reasonable cause to think asbestos is present.

TRAINING

All supervisors be trained to:

1. Initiate the procedures to verify that suspect material is or is not asbestos.
2. Follow the appropriate procedures to protect employees against contact with asbestos.


PROCEDURES:

FRIABLE ASBESTOS

1. Friable asbestos is defined as any asbestos containing material or product which can be crushed by hand.
2. Friable asbestos shall not be handled or processed by any McGraw employee. The handling of all friable asbestos shall be by a certified asbestos abatement contractor.
3. When friable asbestos is encountered in the planning stages of a job, the general superintendent will be notified and he will notify the owners of the company for which McGraw is working. He will assist in the coordinating, planning, and scheduling of an appropriate asbestos abatement contractor.
4. If material which might be asbestos is unexpectedly encountered during a job:
 - A. That portion of the job which could result in a release of asbestos shall be immediately halted.
 - B. The general superintendent shall be called to arrange for material testing to determine if the material does,

in fact, contain asbestos. Until a determination has been made the material will be treated as asbestos.

- C. The general superintendent will initiate any appropriate intervention to prevent employee exposure including immediate encapsulation if necessary.
 - D. If asbestos is present, or assumed to be present and the job cannot be stopped until the asbestos can be removed by a contractor, then appropriate high efficiency respirators shall be issued and fitted and air samples shall be collected.
 - E. The job may continue when the asbestos hazard has been removed or effectively controlled.
- S. THERE WILL BE NO:
- A. Rigging, tying off, cutting, drilling or grinding on areas within the work area that may have asbestos.
Ex: pipes, walls, sheeting, etc.

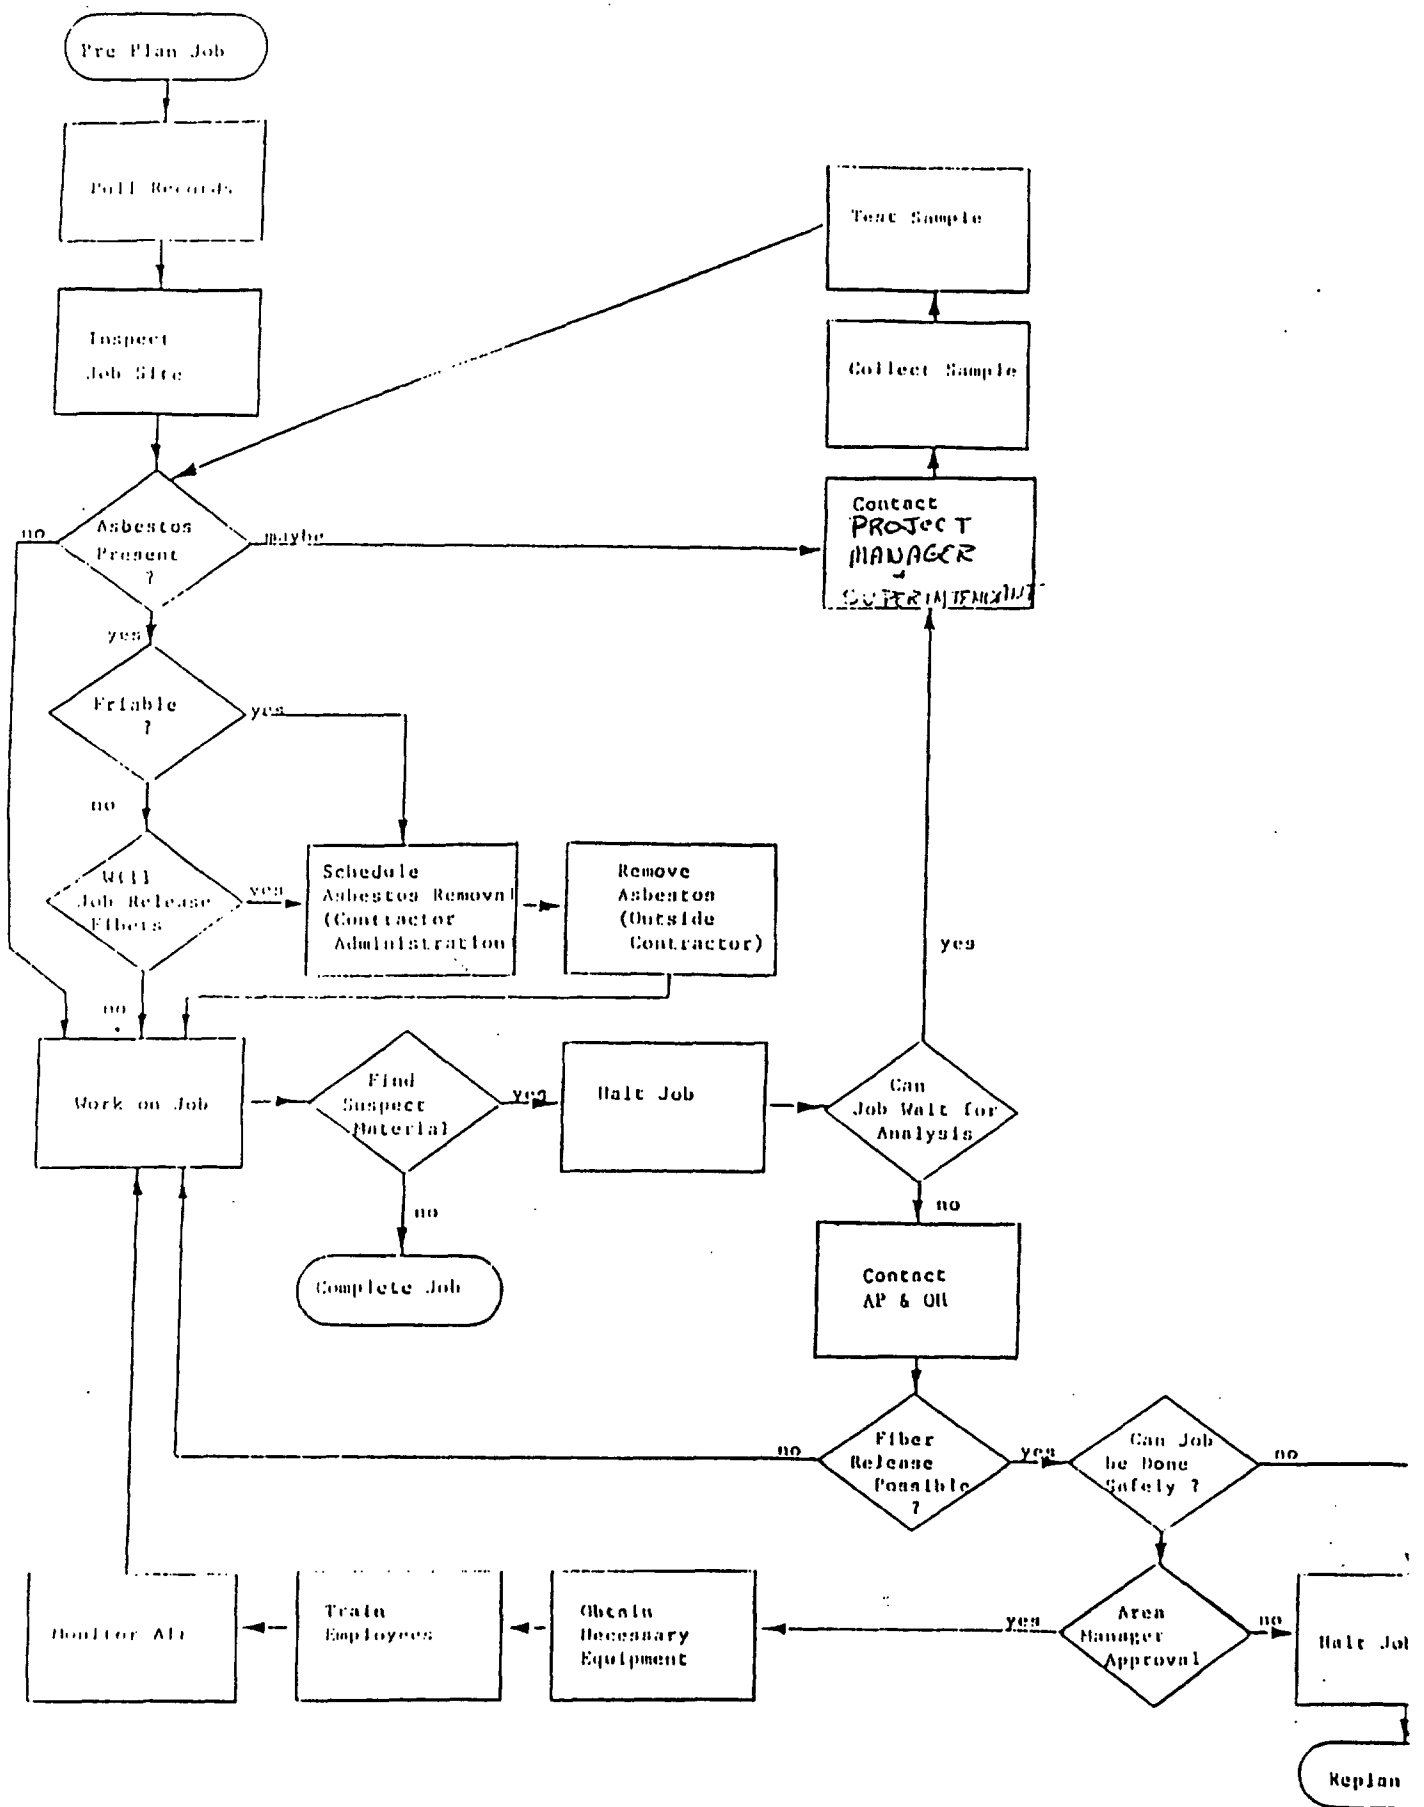

MCGRAW CONSTRUCTION COMPANY, INC.

ASBESTOS PROCEDURE SIGN-OFF

DATE 5-4-90

THE UNDERSIGNED HAVE RECEIVED AND UNDERSTAND THE MCGRAW ASBESTOS PROCEDURES AND BY THEIR SIGNATURES STATE THEY WILL IN TURN ADVISE THEIR GENERAL FOREMEN, FOREMEN, AND CRAFTS WORKERS OF THE PROPER PROCEDURES FOR ASBESTOS AND AGREE TO ABIDE BY THESE PROCEDURES AT ALL TIMES.

1.	<u>Mike Miller</u>	BADGE #	<u>4520</u>
2.	<u>Garvin Lons</u>	BADGE #	<u>4508</u>
3.	<u>Earl O'Brien</u>	BADGE #	<u>4518</u>
4.	<u>Brad Smith</u>	BADGE #	<u>4598</u>
5.	<u>Donald Tarvin</u>	BADGE #	<u>4617</u>
6.	<u>James B Murray</u>	BADGE #	<u>4517</u>
7.	<u>George Russell</u>	BADGE #	<u>4561</u>
8.	<u>Walter Clark</u>	BADGE #	<u>4510</u>
9.	<u>Mike Wass</u>	BADGE #	<u>4615</u>
10.	<u>Mark Dordridge</u>	BADGE #	<u>4559</u>
11.	<u>William J Kirk</u>	BADGE #	<u>4614</u>
12.	<u>Herbert Morgan</u>	BADGE #	<u>4592</u>
13.	<u>George Morgan</u>	BADGE #	<u>4591</u>
14.	<u>Bob Taylor</u>	BADGE #	<u>4616</u>
15.	<u>Walter J. Guffey</u>	BADGE #	<u>4575</u>
16.	<u>Richard J. Tenckler</u>	BADGE #	<u>4516</u>
17.	<u>Alfred Lepore</u>	BADGE #	<u>4597</u>
18.	_____	BADGE #	_____
19.	_____	BADGE #	_____
20.	_____	BADGE #	_____

MCGRAW CONSTRUCTION COMPANY, INC.

ASBESTOS PROCEDURE SIGN-OFF

DATE _____

THE UNDERSIGNED HAVE RECEIVED AND UNDERSTAND THE MCGRAW ASBESTOS PROCEDURES AND BY THEIR SIGNATURES STATE THEY WILL IN TURN ADVISE THEIR GENERAL FOREMEN, FOREMEN, AND CRAFTS WORKERS OF THE PROPER PROCEDURES FOR ASBESTOS AND AGREE TO ABIDE BY THESE PROCEDURES AT ALL TIMES.

1. _____ BADGE # _____
2. _____ BADGE # _____
3. _____ BADGE # _____
4. _____ BADGE # _____
5. _____ BADGE # _____
6. _____ BADGE # _____
7. _____ BADGE # _____
8. _____ BADGE # _____
9. _____ BADGE # _____
10. _____ BADGE # _____
11. _____ BADGE # _____
12. _____ BADGE # _____
13. _____ BADGE # _____
14. _____ BADGE # _____
15. _____ BADGE # _____
16. _____ BADGE # _____
17. _____ BADGE # _____
18. _____ BADGE # _____
19. _____ BADGE # _____
20. _____ BADGE # _____

General foreman and stewards of each craft

	FOREMAN	STEWARDS
1. Laborers	CARL KING ✓	John Allen Eddy Deaton
2. IRON WORKERS	Kenny Coffe CLIFF KENDER	Rodny ARNTS
3. ELECTRICIANS	Bill BARRY ✓	John Deaton
4. CARPENTERS	STEVE FREEZE ✓ JOHN GRAY	Bill CONNOR
5. OPERATORS	DOUG COLLINS ✓	Richard DAVIS
6. MILLWRIGHTS	TERRY OWEN ✓	
7. Pipefitters	David Green ✓ BRETT WISMAN	Johnny Hutchinson LESS CONNORS
8. Bricklayers	Ray Packett ✓	CONNELLY TURNER
9. <u>TEAMSTERS</u>	Ben BARROW ✓	Dick MORNINGSTAR
10. PAINTER	Ed Davis	
11. BOILERMAKER	Butch GRIGSBY	Jeff DRAGO

Steve Grege

6.1

Steve Compton

Jim Lee

Paul Marshall

AW CONSTRUCTION COMPANY, INC.

SBESTOS PROCEDURE SIGN-OFF

DATE 4-20-70

THE UNDERSIGNED HAVE RECEIVED AND UNDERSTAND THE MCGRAW ASBESTOS PROCEDURES AND BY THEIR SIGNATURES STATE THEY WILL IN TURN ADVISE THEIR GENERAL FOREMEN, FOREMEN, AND CRAFTS WORKERS OF THE PROPER PROCEDURES FOR ASBESTOS AND AGREE TO ABIDE BY THESE PROCEDURES AT ALL TIMES.

1.	<u>Bill Berry</u>	BADGE # <u>1293</u>
2.	<u>Doug Collins</u>	BADGE # <u>3009</u>
3.	<u>Ben Barrow</u>	BADGE # <u>5036</u>
4.	<u>Lee Hicks</u>	BADGE # <u>0813</u>
5.	<u>Eddy Over</u>	BADGE # <u>3587</u>
6.	<u>Is Terling Cockerham</u>	BADGE # <u>6001</u>
7.	<u>Alfred H. Nation</u>	BADGE # <u>2099</u>
8.	<u>Long E. M. Brown</u>	BADGE # <u>B 0044</u>
9.	<u>Rol Carberry</u>	BADGE # _____
10.	<u>Ray Tackett</u>	BADGE # <u>4588</u>
11.	<u>Richard W. Davis</u>	BADGE # <u>0905</u>
12.	<u>Mike Reibert</u> <u>Proj. Mgr.</u>	BADGE # _____
13.	<u>Herbin Helton</u>	BADGE # <u>2066</u>
14.	<u>Paul Helton</u>	BADGE # <u>2025</u>
15.	<u>Carl King</u>	BADGE # <u>0221</u>
16.	<u>David H. Greene</u>	BADGE # <u>4115</u>
17.	<u>Michael J. Connor</u>	BADGE # <u>5554</u>
18.	_____	BADGE # _____
19.	_____	BADGE # _____
20.	_____	BADGE # _____