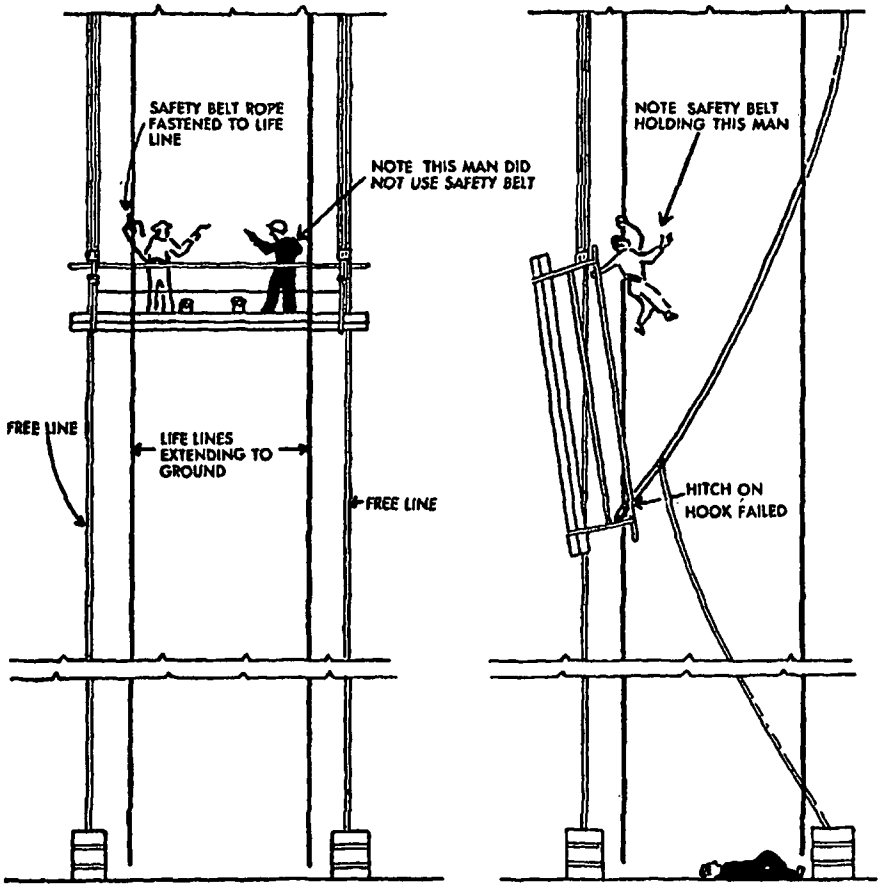


Fig. 15-21. Swing stage scaffold failure Each man on a swinging scaffold should wear a safety belt tied off to a separate lifeline. Drawing at right shows accident to man who was not wearing safety belt

lifeline with a triple sliding hitch or with a mechanical rope grab (See Figs. 15-20 and 15-21)

Horse scaffolds

Horses may be used by workmen doing light work and may also be required for workmen engaged in the heavy trades. Construction details for light scaffold horses are shown in Fig 15-22 Heavy trades scaffold horses differ from the light types in that they have heavier members [*]

Nailing extension pieces to the legs of

[*]See Associated General Contractors of America, Inc, 1957E St NW, Washington, D C *Manual of Accident Prevention in Construction*