
PLAINTIFF'S EXHIBIT

GP-846

GEORGIA-PACIFIC CORPORATION COMPANY • 1970

BUILDER DEALER PRODUCT CATALOG

- Catalog A Structural Sheathing Subflooring & Decking
- Catalog B Underlayments
- Catalog C Concrete Forms
- Catalog D Siding
- Catalog E Interior Paneling
- Catalog F Gypsum Wallboard Lath & Plaster

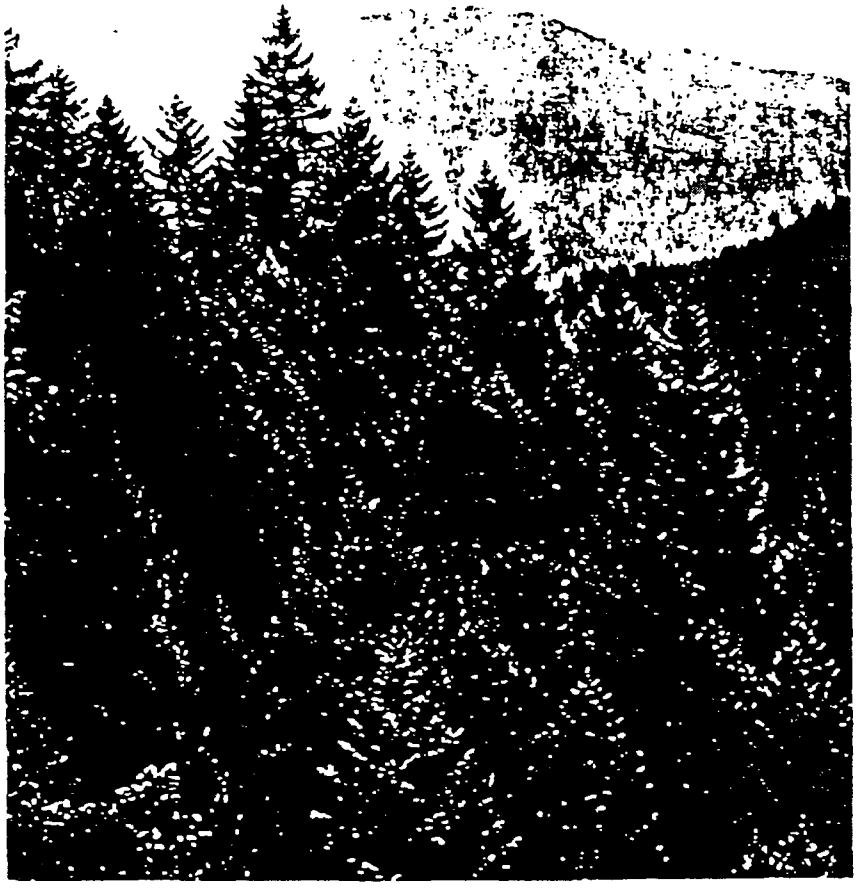



SGP 0002675

2 JOINT SYSTEM PRODUCTS



G-P/[redacted] Compound

G-P/Best[redacted] Compound is a vinyl multi-purpose joint system product. A single bag offers taping, topping and texturing. It can be used for all coats in the reinforcing and concealing of joints in gypsum wallboard construction. The binder in Triple Duty, being a vinyl, gives this product a wet life of 30 to 60 days duration. This allows pre-mixing in large quantities prior to application. Triple Duty can be applied using standard hand or mechanical tools. There is low shrinkage and it is easily sanded. When the application is completed, the surface is ready for priming and decoration as desired with no further preparation necessary. **Coverage:** 60 lbs. per 1,000 sq. ft. (12-50 lbs. per 1,000 sq. ft. when used as a texturing material.)

Lb. Package—25 and 50

G-P/Bestwall—Bedding, Topping Compound

G-P/Bestwall Joint System products are designed to conceal joints and nail heads and "surface-weld" wallboard panels together. Properly used, these products assure smooth, seamless appearance of walls and ceilings, with joints as strong as the wallboard itself.

Bedding Compound — Designed to provide maximum adhesion of tape to the joints. It spreads smoothly and may be hand or machine applied. **Coverage:** 15 lbs. per 1,000 sq. ft. (Used in conjunction with 45 lbs. of Bestwall Topping Compound.)

Topping Compound — Used for finishing taped joints and spotting nail heads. Sanding is unnecessary if carefully applied. It is long working with low shrinkage. **Coverage:** 45 lbs. per 1,000 sq. ft. (Over 15 lbs. of Bestwall Bedding Compound.)

Lb. Package—25

G-P/Bestwall—Ready Mix Joint Compound

Ready Mix Joint Compound is an easy-working material for the filling of joints, and embedding the joint reinforcing tape in gypsum wallboard construction. Furnished in cans and cartons ready to use, this stable, all-purpose compound is also excellent for use in covering nail heads and forming interior and exterior angles. Ready Mix Joint Compound assures a standard mixture for uniform workability throughout the job. It has a long wet life and will not spoil even when the container is left opened. Ready Mix Joint Compound is completely compatible with the G-P/Bestwall 1-Day Wallboard Joint Compound and may be used for the topping coat over G-P/Bestwall 1-Day Wallboard Joint Compound. Ready Mix Joint Compound produces an excellent surface for any type of decoration. For best results, the surface should be primed before being decorated.

Package—1 and 5 gal. cans, 4 gal. cartons

G-P/Bestwall—All Purpose Joint Compound

G-P/Bestwall All Purpose Joint Compound is used for bedding tape, topping, corner bead, nail spotting and texturing. When taping be sure the compound under the tape, and the first coat over the tape is thoroughly dry before applying the next coat over the joints. When used for texturing, for best results, apply a vinyl primer to the entire area before texturing. The texture may be applied with a roller, sponge, brush or other suitable implement depending on the type of configuration desired. **Coverage:** 60 lbs. per 1,000 sq. ft.

Lb. Package—25; 18 lbs. with 250′ tape

G-P/Bestwall—[redacted] Day

G-P/Bestwall [redacted] Day Wallboard Joint Compound makes possible the taping and finishing of all wallboard joints within a single day. It is used for all coats preceding the final coat. The compound, a "setting" material, rather than the conventional drying type material, is formulated to set and harden in 2½ to 3 hours. When hardened, G-P/Bestwall 1-Day Wallboard Joint Compound will not shrink. This solves a major problem of wallboard installation, by eliminating days of heating unfinished homes and buildings, time lost traveling to and from jobs, and long delays while waiting for conventional materials to dry and harden. And because there is no shrinkage, quantity of compound and number of coast applied, may be reduced. For best results, use a primer sealer over surface before painting or texturing.

Lb. Package—25



G-P/Bestwall — Texturing Materials

G-P/Bestwall Bestex A, B, C and D are texture materials designed to produce various texture finishes over drywall construction.
Bestex A—contains no aggregate and can be used for both hand and spray application to produce textures such as stipple, swirl, spatter and orange peel finishes.
Bestex B—contains a small amount of aggregate and produces medium coarse textures such as sand finishes.
Bestex C—contains a large amount of aggregate and is used for coarse textures such as simulated acoustic finishes.
Bestex D—a texture with coarse aggregate for simulated acoustic ceilings.
B, C and D textures are for spray application only. All three textures produce hard surfaced, white, decorative finishes that have excellent light reflective qualities and hiding power. If desired, Bestex textures can be painted with latex or vinyl paint. Coverage: Bestex A-12-50 lbs. per 1,000 sq. ft. depending upon texture. Bestex B, C and D Finishes approx. 300 to 500 sq. ft.

Lb. Package — Bestex A 25 lb., Bestex B, C, D, 40 lb.

SGP 0002677

SPECIFICATIONS FOR WALLBOARD JOINT TREATMENT

Scope

All walls and ceiling surfaces are included. Furnish all labor and material necessary to reinforce and conceal joints between gypsum wallboards and [illegible] nailheads in a first-class workmanship manner.

Materials

1. One-Material Treatment—G-P/Bestwall Joint System Compound Triple Duty Joint Compound, or G-P/Bestwall Ready Mix Joint Compound. Used for bedding and for spotting nailheads.

2. Two-Material Treatment—Apply G-P/Bestwall Wallboard Joint Compound, Triple Duty Joint Compound, Ready Mix Joint Compound, One Day Wallboard Joint Compound or Bedding Compound, and embed tape leaving uniform thickness of material under tape. Cover nail or screw heads in field of board at each application of material in joints.

(If joints are irregular or have wide cracks in some places and boards are not in same plane apply G-P/Bestwall Wallboard Joint Compound, Triple Duty Joint Compound, G-P/Bestwall Bedding Compound to taper edge joints, end joints and nail heads. Shear off surplus leaving no material on high edges. Allow 12 hours drying before taping, leaving uniform depth of taper for uniform shrinkage of joint finishes over and under tapes.)

Jointwork

When compound has dried completely, cover taped joints with Wallboard Joint Compound, Triple Duty Joint Compound, Ready Mix or Topping Compound. (When 1-Day Wallboard Joint Compound is used, the taped joint can be covered as soon as initial coat is set and before it dry.) Shear off surplus leaving uniform coverage over tape with edges well feathered.

When preceding coats are completely dry (where 1-Day is used it is only necessary for it to be hardened, not completely dry) cover joints second time with Wallboard Joint Compound, Triple Duty Joint Compound, Ready Mix Joint Compound, or Topping Compound. Shear off surplus leaving smooth, well feathered joint.

For best results and more uniform suction for decoration apply skim coat of wallboard Joint Compound, Triple Duty Joint Compound, Ready Mix Joint Compound or Topping Compound over entire surface shearing off excess material tightly.