





EACH
**DART
UNION**
HAS THESE
**MONEY-
SAVING
QUALITIES**

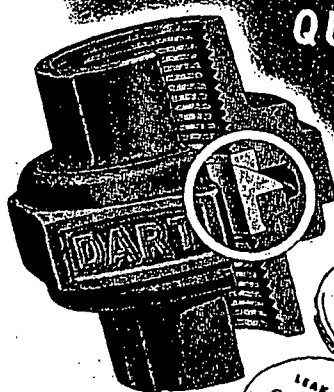


**Always
Specify
DARTS** — because in length
of service they cost least.
E. M. DART MFG. CO.
Providence 5, Rhode Island

**DART
UNIONS**

to 4000 lb in four models. The hydraulic lifting and lowering drive traction unit are battery operated through series-wound electric motor. All controls, two speeds forward, reverse, raising and lowering, horn, and key switch, are mounted in the log-handle head. Therefore lifting can be raised or lowered when truck in motion without moving away from handle. Master drive unit, including linkage mechanism, is mounted on axle going over sills, ramps or uneven ground. Safety brake applies automatically when handle triggers are not held down. Drive unit assembly can be changed in 20 min. Lewis-Shepard Products, 283 Walnut St., Watertown 72, Mass.

Cutting Torch

Cutting torch style 9016 is available in 21- or 36-in. lengths, equipped with 90-deg torch head. Cuts stainless steel using Alcoa's Flux-Injection process. Constructed with monel metal head, stainless steel tube, and stainless-steel lever and ribbed handle. Remote control automatically coordinates flux feed with cutting oxygen to eliminate separate flux control. Air Reduction Sales Co., 60 E. 43rd St., New York 17, N. Y.



Automatic Air Vents


Man-O-Mist automatic air vents are in hot or cold-water lines, hot-water radiators, convectors, unit heaters and other applications where air pockets retard free circulation. Working parts are mounted on a removable bonnet for quick servicing. Valve has monel metal spring and Neoprene valve seat. No. 7 is for pressures not exceeding 75 psi. No. 77 is same as No. 7 with additional pipe connection on side, and No. 77 is for pressures not exceeding 50 psi. Man-O-Mist, Inc., 3217 N. Paulina St., Chicago, Ill.

Top-Suction Pump

DESIGNED TO PREVENT water-pressure from breaking shaft oil seal, this air-operated sump pump has top suction. When pump is not in operation, oil seal is subjected to static pressure only from depth of immersion in sump. Pump is operated by vane-type air motor. When pump operating

First — make sure the lubricating system is clean
with **Gulf Turbine Flushing Oil**

- cleans effectively
- protects against rust
- does not affect lubricating qualities of turbine oil

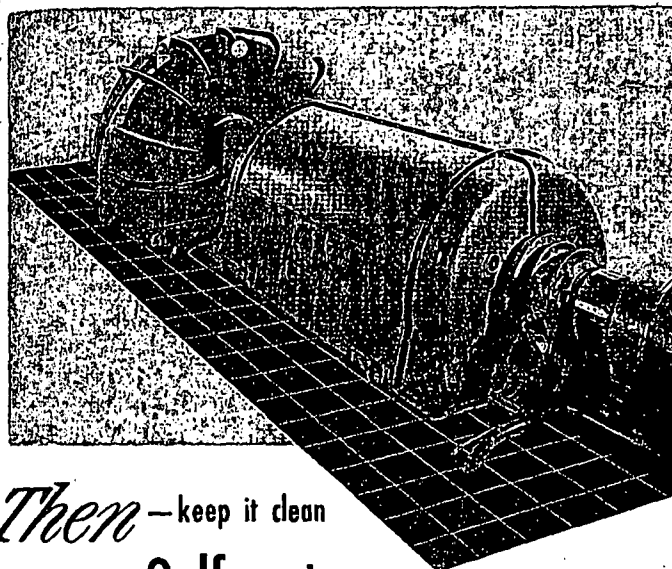

Then — keep it clean
with **Gulfcresc**, the world's finest turbine oil

By taking these two steps, you can insure top lubricating efficiency down through the years for your new steam turbine.

The use of Gulf Turbine Flushing Oil—before the initial fill of lubricating oil—will remove grease type slushing compounds and carry away harmful abrasives which might be in the circulating system. Thus you make sure the system is clean—and avoid the possibility of trouble caused by contaminants.

For the finest lubrication — longer-lasting

Gulf Oil Corporation · Gulf Refining Company

Division Sales Offices:

Boston · New York · Philadelphia · Pittsburgh · Atlanta
New Orleans · Houston · Louisville · Toledo

protection — it will pay you to investigate the advantages of Gulfcresc Oil WCR. Because of its outstanding resistance to oxidation—it's Alchlor-processed — Gulfcresc Oil WCR lasts indefinitely. With this quality oil and good operating practice, you can be sure there will be no sludge deposits in cooler tubes, bearing pedestals, or oil lines to worry about.

To get these benefits for your new turbines, call in a Gulf Lubrication Engineer today. Write, wire, or phone your nearest Gulf office.

