
PLAINTIFF'S EXHIBIT
UC-P-140

Rm 215

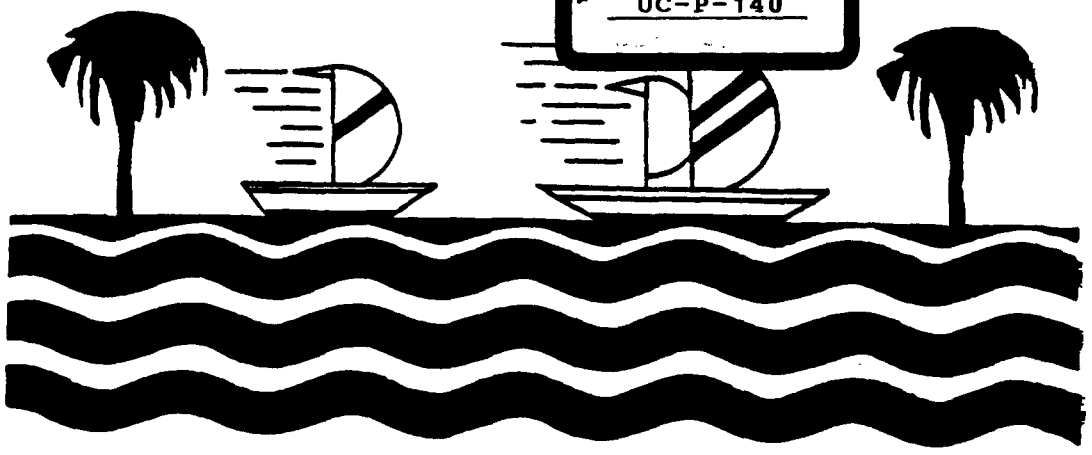

DATE: Nov. 11, 1991 TIME: 6 00 A.M.

TELEFAX TRANSMITTAL TO: U. C. C. Contract Services (512) 788-3607

ATTENTION: Brett Kelley

SENT BY: Fred A. Berger

TOTAL PAGES INCLUDING THIS PAGE: (3)

NOTES: Wilma, I'll be in my room for a little while, Please call and let me know how this turned out. Fred Room 215

HYATT
LONG BEACH

200 SOUTH PINE AVENUE LONG BEACH, CA 90802-4553 USA

TEL (310) 491-1234 FAX (310) 432-1972

Specifications To Remove Built-Up Roof — LPI.

1. Roof to be removed is located on Building 341 in the LPPEI Unit - Seadrift Plant.

2. Roof is approximately ___ ft. x ___ ft. and covers approximately ___ sq. ft. of surface area.

3. Roof is a flat, built-up type roof consisting of transite decking with tar, felt, and gravel built up on decking.

4. Transite decking contains 15% to 25% chrysotile asbestos fibers as shown by bulk asbestos sample analysis.

5. Bulk asbestos sample analysis indicates there are no asbestos fibers in the remainder of roofing material.

6. All transite type material and any other materials that contain pieces of transite will be removed and disposed of as non-friable asbestos containing material.

7. Disposal of all removed roofing material (including asbestos containing material) will be done on-site.

8. Transite will be kept wetted at all times during removal and be placed in containers that are double lined and sealed before disposal.

016298

9. Contractor will provide all labor, equipment, and supplies required to remove roof, transport removed roofing material, and place in plant or-site landfill.

10. Union Carbide will provide crane for lifting and lowering materials and supplies onto roof, if needed.

11. Potable water and electricity will be provided by Union Carbide.

12 Area air monitering will be performed by Union Carbide.

13. Personnel monitering will be performed by Contractor.

14. Decontemination facilities will be provided by contractor.

15. Contractor will comply with all local, state, and federal regulations regarding the removal and disposal of asbestos containing material.

16. Contractor will comply with all plant safety procedures and work rules required for completion of job.

17. Contractor will schedule and coordinate work hours with the operating department.

Recommended Contractors: Service Environmental; Win-Way; Gilman; and Basic.

Fred A. Berger 11/11/91

016299