

FILE NAME: Engineering (ENG)

DATE: 1943 Nov

DOC#: ENG027

DOCUMENT DESCRIPTION: Trade Journal Article - Air Borne Enemies

SAFETY ENGINEERING

The Magazine of Safety

REG. U.S. PAT. OFF.

A MONTHLY PUBLICATION DEVOTED
TO ACCIDENT PREVENTION, HEALTH
CONSERVATION AND FIRE CONTROL

Copyright, 1943
Alfred M. Best Company, Inc.
75 Fulton Street, New York 7, N. Y.
Chicago Atlanta Dallas Boston Los Angeles Cincinnati

ALFRED M. BEST
EDITOR IN CHIEF

ARTHUR C. CARRUTHERS
EDITOR

HARRY ARMAND
MANAGING EDITOR

WILLIAM FOXHALL
ASSISTANT EDITOR

★ ★ ★

ARTHUR SNYDER
BUSINESS MANAGER

WALTER H. BROCKHAVEN
SALES MANAGER



PICTURE CREDITS

Our Thanks for the Courtesy:

Front Cover, O.W.I. photo;
Page 10, Courtesy National
Safety Council; Page 20, Photo
by Gilmore Oil Co.; Page 51,
Courtesy U. S. Public Health
Service.

PRINTED
IN U.S.A.

PLEASE NOTE!

Wartime transportation difficulties, together with man-power shortage in Post Offices and printing plants may delay somewhat the delivery of your copy of SAFETY ENGINEERING.

We ask your sympathetic understanding of conditions beyond the control of publishers for the duration.

Contents

VOL. 86, NO. 5

NOVEMBER 1943

EDITORIALS

Looking for the Winner	9
What More Can You Do?	9
The Industrial Nurse	9



3 Paths to Safety—by HARRY ARMAND	10
Murder—Safe and Legal—by RAYMOND P. DAY	17
Be Ready for General Winter	20
Where to Get Safety Pictures	25
Spare the Blame—by H. W. McCrone	26
High Speed Fire Control—by C. L. JONES	28
Light to Show the Way—by A. K. GAETJENS	30
Arsenic Fumes	35
Spend Wisely for Safety	40
Old Man River Keeps Losses Down	46
Safety for Women Employees	49
Air Borne Enemies—by W. E. McCORMICK	51
The Plant Physician and the Safety Engineer—by C. LEGGO, M.D. (Conclusion)	56
Vitamins—Yes or No?—by HENRY S. BEAN (Conclusion)	61
The Industrial Nurse	65
Someone to Blame	67
Recent Additions to the Library	68
New Products	70

RAYMOND T. SMITH, Resident V. P. PAYSON H. RYAN, V. P.
FRANK J. MATRE, Special Rep. FELIX T. MCCARTHY, JR.
10 SO. LA SALLE STREET Spec. Rep.
CHICAGO 3 708 Traction Bldg.
CINCINNATI 2


NEIL A. KAIN
Manager
SOUTHERN DEPARTMENT
ATLANTA, GA.

ROBERT S. BEGLEN
GENE HANSELMAN
Representatives
928 KIRBY BUILDING
DALLAS 1

WALTER A. SPANGLER
Representative
50 CONGRESS ST.
BOSTON 9

HAROLD F. KANE
704 SO. SPRING STREET
LOS ANGELES 14, CAL.

AMERICA'S PIONEER



SAFETY MAGAZINE

industrial Hygiene

ASSOCIATE EDITOR

JACOB A. GOLDBERG, A.M., Ph.D.

Secretary Industrial Hygiene Division
New York Tuberculosis and Health Ass'n.

AIR BORNE ENEMIES

by W. E. McCORMICK*

WHILE the health hazards produced by the inhalation of certain dusts have been known for a considerable period of time, it remained for the past decade to bring the real importance of these hazards to the attention of industry. This is best attested to by the instituting of industrial hygiene departments in a majority of the states, several cities, and many industrial companies. Where heretofore a silicosis or lead case with many


Ventilating equipment designed to remove contaminants from atmosphere.

of these companies was the usual and expected thing, it is now a rarity. This progress has been due very largely to our increasing knowledge of the hazards, and of proper methods to use for the protection of the worker.

In the ceramic industry, due to its diversified fields and due to the volume of industrial workers employed in them, it is of especial importance that we recognize and combat effectively these health hazards. In the pottery, the refractory, and the porcelain industries—to mention only a few—the worker is frequently exposed to either high concentrations of silica or certain toxic dusts.

Types and Amount of Dust

We might classify, for our purpose at least, dusts encountered in various industrial operations as nuisance, such as flour, wood, etc.; fibrosis-producing, of which silica and asbestos are recognized; toxic, such as lead, zinc, etc.; and explosive, of which coal and grain dust are the best examples. We shall confine ourselves primarily to a discussion of the second and third types—the fibrosis-producing and toxic dusts, because it is from these two that the majority of industrial dust hazards arise.

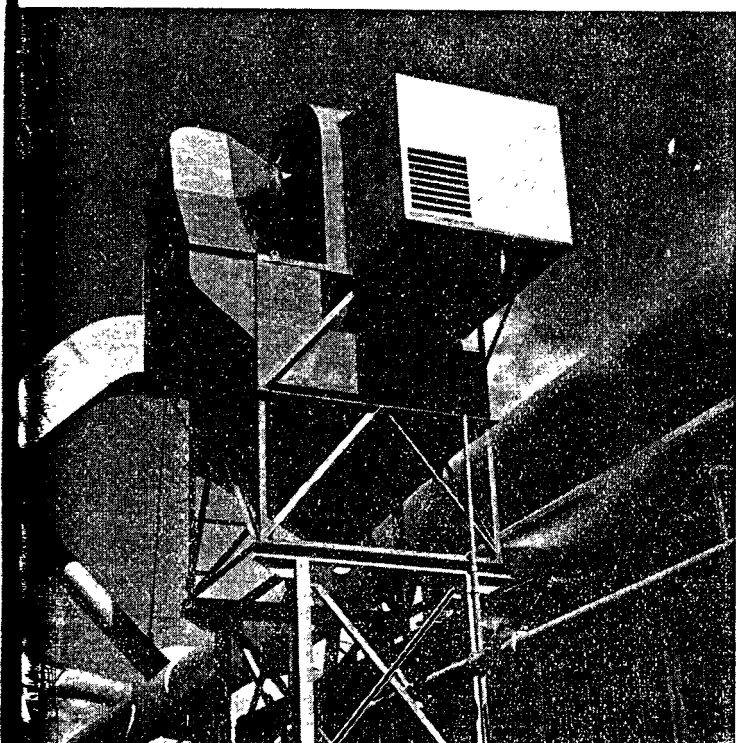



Shorten the disability period with the new, faster-healing **BIO-DYNE TREATMENT**

NEXT to reducing accidents, themselves, your greatest concern is *reducing the time lost as a result of accidents in your plant.*

And that's why the newly-discovered *Bio-Dyne treatment for burns* is being so widely adopted in war-busy industrial plants throughout America.

For it has been demonstrated consistently in industrial burn cases, that Bio-Dyne Ointment *shortens* the disability period, gets men back on the job faster.

A new concept in healing
Discovered in a world-famous research institute, biodynes

bring to science an entirely new concept in healing and tissue repair. They are neither hormones nor vitamins, but natural cellular substances which have the power to stimulate both the growth and respiration of living cells, resulting in:

1. More rapid healing
2. Almost immediate relief from pain
3. Prevention of scars where often they'd be expected

Write for detailed information on the new Bio-Dyne Treatment. Or mail the coupon, order a supply of Bio-Dyne Ointment, today.

BIO-DYNE Ointment

Manufactured by Sperti, Inc.
Cincinnati, Ohio

SPERTI, INC.

Dept. E 4, Beech and Kenilworth Aves.,
Norwood Station, Cincinnati, Ohio

Please ship by _____


_____ jars 15-oz. Bio-Dyne Ointment at. .\$. 5.50 per jar

_____ jars 5-lb. Hospital Size at. 21.50 per jar

Terms: 2% — 10 days — net 30 days

Name _____

Address _____



In determining the dust hazard of any operation, it is imperative to know both the amount and kind of dust found in the atmosphere in the worker's breathing zone. The kind of dust can frequently be determined from a knowledge of the material or materials being processed. However, where a combination of materials or constituents is used, it is desirable to know as accurately as possible the amount of each. This frequently necessitates a chemical and petrographic examination of the collected dust.

Dust Sampling Devices

Of the several instruments used in this country for dust sampling, the Greenburg-Smith impinger (modified form, by Hatch, Warren, and Drinker) has enjoyed the greatest popularity. This has been partially, if not largely, due to the fact that the dust surveys made by the U. S. Public Health Service record the results in counts taken from impinger-collected samples. The instrument also has the further advantages of large sampling volume (one cubic foot per minute), and high collecting efficiency against many of the commoner types of dust, including silica, asbestos, and lead. It should be remembered, however, that its collecting efficiency against the various metal fumes is considerably lower than that against dusts.

In operation, a dust sample is collected by drawing the dust-laden air at the rate of 1 C. F. M. through a small orifice in a collecting fluid—usually water, alcohol, or some suitable acid. The dust impinges on the bottom of the flask with an approximate velocity of 100 m. per second, and is thereby sufficiently wetted to be held in the collecting fluid. The sample can then be counted, determined gravimetrically, or chemically.

There has recently been placed on the market a smaller sized impinger, called the micro impinger, in which the sampling rate is one-tenth that of the regular type, and the volume of sampling fluid used is about 10 ml. This instrument, I believe, is hand operated. Its chief advantage lies in its increased portability. Recent tests made by the U. S. Bureau of Mines indicate its collecting efficiencies to be similar to those of regular type.

Another instrument which is finding increased popularity, especially for field use, for dust sampling is the dust counter produced by a well-known optical manufacturer. This instrument provides facilities for taking a large number of grab samples and, if desired, reading the dust count immediately in the field. Due to the several variables which occur between different dusts, no satisfactory conversion of the readings made with the counter and those made with the impinger has been devised. However, for any one given industrial process the ratio of these two values is fairly constant.

The electric precipitator has for quite some time been used as a laboratory device for dust studies. This device operates in principal by drawing the dust-laden air stream either between two oppositely charged electrodes or through a high A. C. potential field. The precipitated dust is caught on either a glass or metal tube and the amount determined either gravimetrically, chemically, or counted. The device possesses very high collecting efficiency against all dusts and fumes. Recently an instrument intended for field usage has been developed.

Is It Hazardous?

If industrial dust hazards are to be properly diagnosed, the results obtained from the dust samples which are collected by any of the above-mentioned methods must be properly interpreted. In brief, we must be able to say whether or not, even though we have found dust in the atmosphere, we have an industrial hazard. Silica and asbestos dust samples are usually counted according to the procedure developed by the U. S. Public Health Service, and the number of particles found expressed as the number of either *free silica* or asbestosis particles per cubic foot of air volume. This presupposes, of course, that we know the percent of the harmful constituent in the atmosphere or that we determine this value from petrographic or chemical analysis. We can then set up a working formula such as percent free silica $\times$ total count = free silica count. We now believe this free silica value should be kept below 5,000,000; in fact, some authorities would put the value even lower—possibly 4,000,000. The finally accepted value, from the standpoint of silicosis prevention, whatever it becomes, must be such that it will be safe for any individual to spend his entire lifetime on a given occupation without contracting silicosis.

The size of the dust particles present is very important. It has been found, of course, that the most active particles in the production of silicosis are the smallest. Particles above 10 microns in diameter are believed to be relatively unimportant so far as the production of silicosis goes. It should be pointed out here that the most hazardous sizes of dust are those sizes which remain longest in the atmosphere and are most difficult to remove from the zone of the worker by mechanical filtration. The small sizes are also those which are most numerous produced during mechanical operations. For example, Hatch and Pool found that 10 particles less than 0.8 micron are produced each minute by an ordinary pneumatic rock drill. From a consideration of Stoke's Law, particles of this size will settle at the rate of about 4 inches per hour, so that the hazard encountered in this particular case can easily be appreciated.

Recent studies by Gardner, however, indicate that the activity of silica dust for producing silicosis increases to a maximum as the size of the

NOW—PROTECTION FOR THE HANDS OF INDUSTRY with LOWILA PASTE

Provides a protective film on the skin of the hands, arms and face, which is non-greasy, does not rub off and cleanses when rinsed with water.

LOWILA PASTE meets the suggestions of leading dermatologists for a skin protective which is effective, non-irritant and detergent.

- PROTECTIVE
- NON-IRRITATING
(EVEN ON THE FACE)
- CLEANSING

Mail the coupon below today for generous trial supply of LOWILA PASTE.

Westwood
PHARMACAL CORP.
Buffalo, New York



LOWILA PASTE

—SEND FOR FREE TRIAL SUPPLY—

WESTWOOD PHARMACAL CORP., 1020 Main St., Buffalo 2, N. Y.

Send generous trial supply of Lowila Paste immediately.

Name

Company

Address

City

State

particles decreases. This lower limit of particle size has not satisfactorily been determined but may lie about .002 micron. This phenomenon may be explained on the basis of the lung's refusal to retain the very finely divided particles.

Lead and other toxic dusts are usually determined by chemical analysis of the dust sample. If the amount of lead found does not exceed .15 mg. of lead per cubic meter of air sampled, the atmosphere is considered safe for workers.

The final phase of our discussion will consist primarily of a consideration of the protective measures which can be used to satisfactorily prevent the occurrence of occupational disease from industrial dust.

Protective Measures

First of all, good housekeeping in the industrial plant will go a long way toward the prevention of excessive dustiness. Procedures such as constantly stirring up the settled dust by means of the too frequently used air hose, dry sweeping, and inadequate removal of settled dust, all tend to increase the dust concentration of the worker's atmosphere. Provision should be made for adequate removal of settled dust at times when the least number of

employees are exposed. Vacuum cleaning, or damp sweeping, should be used and the operators of the cleaning equipment protected with satisfactory respirators.

Frequently, a non-dust-producing or non-hazardous-dust-producing operation can be substituted for those in which hazardous dusts are found. An example of this is the substitution of shot blasting for sand blasting. This type of dust control is sometimes objectionable because of expense, dissimilar end results obtained, or for some other reason. However, there are frequently occasions where the substitution can be conveniently made.

Also, wet grinding or drilling can very often be used in place of dry drilling. This type of dust control is used quite extensively in the granite and rock quarrying industries, and is quite effective. It has, of course, the disadvantages of necessitating an adequate water supply and having the worker exposed to wet and often sloppy working conditions.


Some industries use what might be termed an indirect method of dust control by limiting the periods of exposure of a given worker to the hazardous dusts so that his total daily exposure is below that necessary to produce occupational disease. This procedure is not to be strongly recommended for common practice.

Don't let floor questions floor you


Yes, all Hillyard Floor Treatment Engineers have the answer to the question "How To Save Floors", because of their many years of training and experience. Hillyard Hi-Quality Floor Treatments and Maintenance Products and Hillyard Methods can solve any vexing floor problem. With Hillyard Materials on your floors they will last longer and save

upkeep expense. Write or wire us today, there is a Hillyard Maintenance Expert in your locality, his advice is yours for the asking.

← It's NEW,
it's FREE, Send
for your copy today



ALL HILLYARD
MAINTENANCE
ENGINEERS
HAVE THE
ANSWER!

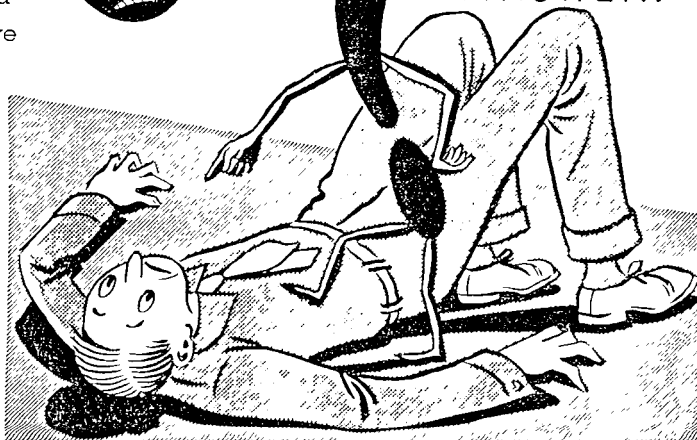

THE HILLYARD COMPANY

.. DISTRIBUTORS HILLYARD CHEMICAL CO... ST. JOSEPH, MO... BRANCHES IN PRINCIPAL CITIES..

Ventilate First

Possibly one of the most effective methods of controlling industrial dust hazards is by means of ventilation. This can be done by adequately ventilating the working space in general, or by means of local exhaust ventilation. The latter method has the advantage of removing the hazardous constituent close to its source of formation, and thus effecting economies in power consumption for moving the required air. It is necessary, of course, in order for local exhaust ventilation to be optimally effective, that the exhaust system be properly designed to adequately take care of the various industrial operations for which it is intended.

Personal Protection

A final method of dust control is by means of personal protective equipment, such as a dust respirator. This type of control is not recommended as a cure-all for every dust problem, but can be advantageously used in a large number of cases.

The dust respirator, the supplied-air respirator, and the sand blast helmet all have been developed to a high degree of efficiency and perfection. For hazardous dusty operations, those devices which are approved by the U. S. Bureau of Mines are recommended. For operations involving no particularly hazardous dust, but where protection is still required, the cheaper unapproved devices can frequently be used satisfactorily.

Oftentimes it can be found more advantageous to apply personal respiratory protection to workers than to use ventilation. On the other hand, frequently the reverse may be true, or a combination of the two methods may be used. Quite frequently it becomes practically impossible as well as quite uneconomical to remove harmful atmospheric constituents to a safe level, and respiratory protection is used as an adjunct.


From Proceedings of Virginia Polytechnic Institute Conference on Industrial Safety

SAFETY ENGINEER WANTED

Aggressive Mid-West Casualty Insurance Company wants Safety Engineer, 35 to 40 years of age, thoroughly experienced in Workmen's Compensation, Elevator, Liability and Burglary Lines, to organize and manage Engineering Department. An excellent opportunity for the proper individual who can qualify and who has been waiting for a position of this kind.

ADDRESS
BOX 176
SAFETY
ENGINEERING

75 FULTON STREET
NEW YORK 7, N. Y.

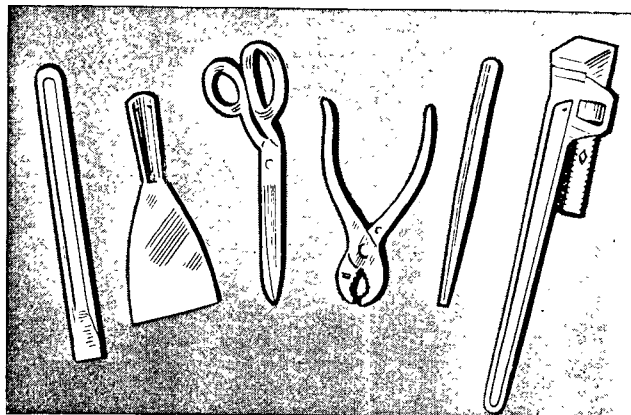

AMPCO SAFETY TOOLS

Protect Life and Property Against Hazards of Flying Sparks

You know the danger of using ordinary steel tools in hazardous locations where chance sparks might cause disastrous fires and explosions. Through the use of Ampco, non-sparking Safety Tools, life and property are adequately protected.

These tools are made of Ampco Metal, long accepted in Industrial fields for their strength and hardness. Carefully designed to assure maximum service, they equal standard steel tools in usefulness. Certain cutting and gripping tools, such as pliers and wrenches, are also made of Ampco-Beryllium-copper.

Special tools may be secured, but the Ampco line, covering over 400 items, is unusually complete.

Secure a copy of the Ampco catalogue and see for yourself the extensive line of non-sparking tools available. Take steps to install these tools in your hazardous departments, thus safeguarding your men and property. Send for the Ampco Safety Tool Catalogue today.

AMPCO METAL, INC.

Department SE-11
MILWAUKEE 4, WISCONSIN

