No. 82 T

EFFECTIVE SEPTEMBER 29, 1954

SUBJECT TO CHANGE WITHOUT NOTICE

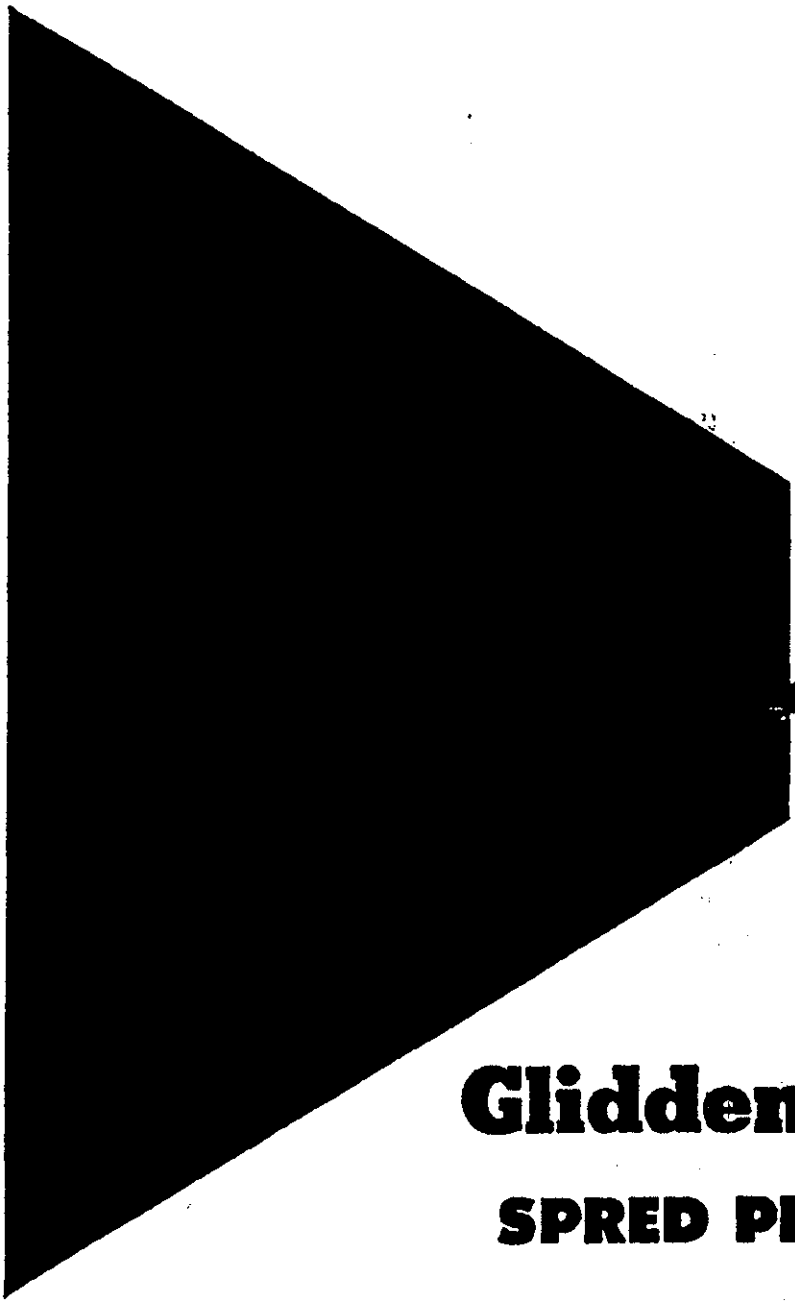

LER

Glidden Paints

SPRED PRODUCTS

QUALITY Glidden PRODUCTS

THE GLIDDEN COMPANY, NATIONAL HEADQUARTERS, CLEVELAND 2, OHIO

INDEX

Product	Page
A	
Acrylic Sign Finishes	26
Ad-El-Ite Paint and Varnish Remover	3
Alkali-Resisting Primer No. 6419	3
Alkyd Enamels	3
Aluminum Asphalt Roof Paint	3
Aluminum, Metallite	17
Spray Enamel, Japalac	12
Asbestos Shingle Paint	3
Asphalt Roof Coatings	3
B	
Bar Top Varnish, Glid-Tone Gloss	10
Barn Paint, Endurance	5
Basecoats:	
Endurance	6
Gliddencoat	8
Ripolin Undercoat	20
Speed-wall, Interior	21
SPEED Primer-Sealer	14
Surface Bond	15
Basement Paints:	
Pli-Namel	19
Florenamel	8
SPEED Satin	14
SPEED Glide-On	15
Black Asphaltum	3
Blackboard Finishes, Vitmatic Green	23
Bleach, Glid-Tone Wood Bleach	10
Blending Colors — Dramatone	14
Colors-in-Oil	4
Blending Liquid, Endurance Shingle and Shake Stain	7
Boat Varnish, Glid-Tone Spar Varnish	10
Brick Paint, SPEED Glide-On	15
Brilliant Colors	26
Brush Restorer, Glid-Strip	9
Brushes	4
Brushing Lacquer, Glid-Tone Crystaloq	9
Bulletin Colors	25
C	
Canvas Preservative, Nova-Rot	18
Caulking Compound	4
Celrye	24
Cement and Stucco Paint:	
SPEED Glide-On	15
Cleaner, Glid-N Liquid	9
Colors-in-Oil	4
Concrete Paint:	
Pli-Namel	19
SPEED Glide-On	15
Crack and Crevice Filler, SPEED Patch	16
Surface Bond	15
Creosote Paint, Stock Farm White	22
Crystaloq, Glid-Tone	9
D	
Day-Lite Dado Enamel	24
Day-Lite White Fume-Resistant	24
Deck Paint, Florenamel	8
Deep Colors — SPEED Satin	14
Detergents, Glid-N Liquid Cleaner	9
Dramatone Tinting Colors	14
Drier, Japan	12
Driwel Clear, Silicone	5
Duo-Tex	24
E	
Enamel:	
Florenamel	8
Japalac	11
Japalac Spray	12
Pli-Namel	19
Ripolin	20
SPEED Lustre	15
Truck, Tractor & Machinery	22
Enamel Undercoaters:	
Gliddencoat	8
Ripolin Undercoat	20
Endurance:	
Barn Paint	5
Basecoat	6
House Paint	6
Imperial	6
Mildew & Fume Resistant	6
Pastel Colors	6
Shingle & Shake Stain	7
Trim & Shutter Colors	7
Euston White Lead	7
Everon House Paint	7
Exterior Basecoat	6
E-Z-C Enamels	24
F	
Farm Building Paints:	
Endurance Paints	5-7
Maintenance Finishes	24
Metallite	17
SPEED Products	14-16
Stock Farm White	22
Fence Paints:	
Metallite	17
Nev-A-Rust	18
Stock Farm White	22
Filler, Glid-Tone	11
Florenamel	8
Floor Finishes:	
Florenamel	8
Glid-Tone Gloss Varnish	10
Penetrex	19
Pli-Namel	19
Floor Wax — Glid-N	9
Four Hour Enamel: Japalac	11
G	
Gliddex Paste Wax	8
Gliddencoat	8
Gliddenspar	8
Glid-N Floor Wax (Liquid)	9
Glid-N Liquid Cleaner (Detergent)	9
Glid Strip (Non-Flammable)	9
Glid-Tite Galvanized Iron Primer	9
Glid-Tone Gloss Varnish	10
Glid-Tone Products	9-11
Glid-Tone Satin-Sheen Varnish	10
Glid-Tone Spar Varnish	10
Glid-Tone Stains	10
Glid-Tone Wood Bleach	10
Glid-Tone Wood Filler	11
Glide-On, SPEED	15
Gloss Finishes:	
Florenamel	8
Japalac	11
Ripolin	20
Speed-wall	21
Gold, Spray — Japalac	12
Grasscloth	24
Graphic Arts Finishes	25-26
Gymnasium Floor Finish	24
H	
Heat Resisting Aluminum	17
Heavy Duty Floor Finish	24
High Gloss Stucco Process Colors	25
House Paint:	
Endurance	5-7
Everon	7
SPEED Glide-On	15
I	
Imperial Mastic Paint	6
Interior Aluminum, Metallite	17
Interior Varnishes	10, 20
Iron Primer, Glid-Tite	9
J	
Japalac Enamel	11
Japalac Screen and Iron Enamel	11
Japalac Spray Enamel	12
Japalac Varnish Stain	12
Japan Drier	12
L	
Lacquer, Glid-Tone Crystaloq	9
Latex Paints	14-16
Linoleum Coating, Crystaloq	9
Linseed Oil	12
Liquid Cleaner Glid-N	9
Liquid Red Lead	12
Liquid Wax, Glid-N	9
M	
Machinery Enamel:	
Maintenance Finishes	24
Japalac	11
Truck, Tractor and Machinery	22
Masonry Finishes:	
Drivel	5
SPEED Glide-On	15
Mastic White Finish	24
Masticrete	17
Masticrete Primer	17
Metal Primers:	
Glid-Tite	9
Red Lead	12
Metal Protective Paints:	
Glid-Tite	9
Metallite	17
Nev-A-Rust	18
Red Lead	12
Metallite, Interior-Exterior	17
Mildew-Resisting Paints:	
Endurance	6
SPEED Glide-On	15
N	
Nova-Rot	18
Nev-A-Rust	18
O	
Oil Colors:	
Colors-in-Oil	4
One-Coat House Paint, Endurance Imperial	6
P	
Paint and Varnish Remover	3, 9
Paste Wood Filler, Glid-Tone	11
Pastel House Paint Colors	6
Patching Plaster, SPEED Patch	16
Penetrex	19
Plastic Roof Cement	19
Pli-Namel	19
Porch and Deck Enamel, Florenamel	8
Posted Bulletin Colors	25
Primers and Sealers:	
Alkali-Resisting 6419	3
Endurance Basecoat	6
Gliddencoat	8
Interior Basecoat	21
Ripolin Undercoat	20
SPEED Primer Sealer	14
Surface Bond	15
Professional Painter Finishes	24
Putty	19
R	
Red Lead	12
Redwood Finish	19
Ripolin Enamel	20
Ripolin Undercoat	20
Rockspar Varnish	20
Romark	24
Roof Paints:	
Aluminum Asphalt	3
Asphalt	3
Metallite	17
Nev-A-Rust	18
SPEED Glide-On	15
Rust Inhibiting Oil	24
S	
Semi-Gloss	24
Screen Enamel, Japalac	11
Semi-Gloss Enamels:	
Ripolin	20
Speed-Wall	21
SPEED Lustre	15
Shake Stain, Endurance	7
Shellac	20
Shingle Stain, Endurance	7
Sign Background Enamels	25
Sign Finishes	25-26
Silk Screen Process Inks	25-26
Smoke Stack Black	24
Specialties Compound, SPEED Patch	16
Spar Varnish, Gliddenspar	8
Glid-Tone Spar	10
Speed-Wall Alkyd Flat	21
Speed-Wall Alkyd Interior Basecoat	21
Speed-Wall Alkyd Semi-Gloss Enamel	21
Speed-Wall Gloss White Enamel	21
Spray-Day-Lite and Related Products	24
Spray Enamel, Japalac	12
SPEED Products	14-16
SPEED Flat	15
SPEED Glide-On	15
SPEED Grasscloth	14
SPEED Lustre	15
SPEED Patch	16
SPEED Primer-Sealer	14
SPEED Satin	14
SPEED Stipple Texture	16
SPEED Surfacene	15
SPEED Texture	16
Stains:	
Glid-Tone, Wood	10
Endurance, Shingle and Shake	7
Standard Screen Process Inks	26
Stipple Texture, SPEED	15
Stock Farm White Paint	22
Stove and Iron Enamel, Japalac	11
Sunton Wiping Stain	24
Surface Bond	15
Surface Conditioner, SPEED Surfacene	16
Swimming Pool Finishes	24
T	
Table Top Varnish, Glid-Tone Gloss	10
Texture Paint, SPEED	16
Tile Roof Paint, SPEED Glide-On	15
Tinners' Paint	22
Tinting Colors	4, 14
Titan-O-Zinc	24
Trim and Shutter Colors, Endurance	7
Truck, Tractor & Machinery Enamel	22
Tube Colors	4, 14
Turpentine	22
U	
Undercoaters:	
Endurance Exterior Basecoat	6
Gliddencoat	8
Ripolin Undercoat	20
Speed-Wall Interior Basecoat	21
SPEED Primer-Sealer	14
Surface Bond	15
V	
Vapor Barrier, SPEED Primer-Sealer	14
Varnishes:	
Glid-Tone Gloss	10
Glid-Tone Satin Sheen	10
Glid-Tone Spar	10
Japalac Clear Spray Finish	12
Rockspar	20
Varnish Remover	3, 9
Vinyl-Latex, SPEED Glide-On	15
Vitmatic Green Chalkboard Coating	23
W	
Water Tank Finishes	24
Wax:	
Gliddex Paste Wax	8
Glid-N Floor Wax	9
White Lead	23
Wood Bleach	10
Wood Filler	11
Wood Finishes	9-11, 19
Wood Preservative, Nova-Rot	18
Wood Stain	10
Z	
Zinc Dust Paint	24

GLD026158

Glidden

	Gals.	Qts.	Pts.	½ Pts.
***AD-EL-ITE PAINT AND VARNISH REMOVER** A top-quality remover. Contains no alkalies, acids, oils or water. Does not raise the grain or discolor the wood. Evaporates very slowly. Very effective in removing old paint, enamel, lacquer and baked japan. APPLICATION—Brush	2.23 (6 Per Case)	.84	.55	.40
***ALKALI-RESISTING PRIMER No. 6419** An easy to apply masonry primer-sealer for interior newly plastered or damp walls, and exterior masonry, brick, stucco and concrete blocks, which are to be painted with synthetic rubber-base or oil base paints. Penetrates deeply into the pores and adheres firmly to the surface, to create perfect bond for finish coat. Resists moisture and alkali. Seals in active lime. Prevents fresh plaster from burning through and discoloring the finish coat. APPLICATION—Brush, Spray THINNER—Turpentine DRYING TIME—16 hours Covers 350-400 Sq. Ft. per gal. *(Also See SPRED Primer-Sealer Alkali-Resisting Primer)*	5.28	1.59	—	—
ALKYD ENAMELS See: Speed-Wall Alkyd Flat and Semi-Gloss and Gloss White; Japalac; Florenamel; Nev-A-Rust; Ripolin; Speed-Wall interior Basecoat; Spred Lustre				
***ALUMINUM ASPHALT ROOF PAINT** Recommended for tar paper, composition and asphalt roofs. Will rejuvenate weathered roofs and insulate with a silvery sheet of aluminum, in one coat. Made with selected asphalts, finest grade aluminum flakes and solvents. APPLICATION—Brush, Spray THINNER—Mineral Spirits or Turp. DRYING TIME—10 hours Covers 275-400 Sq. Ft. per gal., depending on surface.	3.63	—	—	—
ALUMINUM PAINTS See: Metallite; Japalac Spray Enamel, Aluminum **ASBESTOS SHINGLE PAINT** See: SPRED Glide-On				
ASPHALT ROOF COATINGS (Plain, Fibrated, Plastic)		(PRICES UPON REQUEST)		
ASPHALT ROOF PAINT See: SPRED Glide-On.				
BARN PAINT See: Endurance Barn Paint **BASECOATS (Primers)** For Exteriors—See: Endurance Exterior Basecoat; Surface Bond For Interiors—See: Gliddencoat; Speed-Wall Interior Basecoat; SPRED Primer-Sealer; Ripolin Undercoat **BASEMENT PAINTS** For Floors —See: Pli-Namel; Florenamel For Walls —See: SPRED SATIN; SPRED Glide-On				
***BLACK ASPHALTUM** A weather-resisting, quick-drying, gloss black asphaltum base paint. Recommended for exterior iron work, fences, metal sash and other exterior metal surfaces where an economical finish is desired. APPLICATION—Brush, Spray DRYING TIME—2 to 3 hours THINNER—Mineral Spirits or Turp. Covers 400-500 Sq. Ft. per gal.	2.08	.77	.53	.39

* AVAILABLE IN 5-GAL CANS
AT 15c PER GALLON LESS THAN 1-GAL. PRICES.

[redacted]

	Gals.	Qts.	Pts.	½ Pts.
BLACKBOARD FINISHES				
See: Vismatic Green Chalkboard Coating				
BLEACH				
See: Glid-Tone Wood Bleach				
BLENDING COLORS				
See: SPRED Dramatone Tinting Colors; Colors-In-Oil				
BRICK PAINTS				
See: SPRED Glide-On.				
BRUSHES, ALL TYPES		(PRICES UPON REQUEST)		
BRUSHING LACQUER				
See: *Glid-Tone Crystalacq*				
BRUSH RESTORER				
See: Glid-Strip				
CANVAS PRESERVATIVE				
See: *Neva-Rot*				
CAULKING COMPOUND		(PRICES UPON REQUEST)		
CEMENT AND STUCCO PAINT				
See: SPRED Glide-On.				
CLEANER, LIQUID				
See: Glid-N Liquid Cleaner				
COLORS-IN-OIL				
Unexcelled for tinting flat wall paints, Semi-Gloss and Gloss enamels, glazing liquids, white lead and white paste paint. Ground extremely fine in special pale linseed oil for quick and positive dispersion. The finest pigments are used to develop perfect tone and strength of color. Not to be used in latex, emulsion paints or lacquer.			½ Pts.	†1" x 5" Tubes 3 Per Box
Raw Umber, Burnt Umber	5.23	1.58	.58	.24
Raw Sienna, Burnt Sienna	6.13	1.81	.64	.25
Ivory Drop Black	—	1.63	.60	.24
Lamp Black	4.58	1.42	.55	.24
Prussian Blue	—	1.94	.67	.27
Ultramarine Blue (Interior Use Only)	—	—	.73	.27
Chrome Green, Light; Chrome Green, Medium	7.98	2.27	.76	.28
Perma-Green	—	3.64	1.10	.33
Chrome Yellow, Light and Medium	—	2.94	.92	.30
Chrome Yellow, Dark	—	3.59	1.09	.32
Yellow Ochre	5.38	1.62	.59	.25
Venetian Red	4.83	1.48	.56	.25
Rose Lake (Interior Use Only)	—	—	.94	.31
American Vermilion (Interior Use Only)	—	2.99	.94	.31
Perma Blue	—	3.19	.99	.32
CONCRETE PAINT				
See: SPRED Glide-On; Pli-Namel.				
CRACK AND CREVICE FILLER				
See: SPRED Patch; SPRED Stipple Texture				
CREOSOTE PAINT				
See: Stock Farm Paint				

† SUPPLIED IN FULL CASES OR BOXES ONLY. NOT SUBJECT TO FULL CASE ALLOWANCE.

[redacted]

	Gals.	Qts.	Pts.	½ Pts.
DECK PAINT				
See: Florenamel				
DEEP COLORS				
See: SPRED SATIN				
DETERGENTS				
See: Glid-N Liquid Cleaner				
DRAMATONE MULTI-PURPOSE TINTING COLORS				
See: SPRED Products Section				
DRIER				
See: Japan Drier				
***DRIWAL (Clear)**				
A damp-resisting, stain-resisting material designed for application on limestone, stucco, sandstone, concrete and other porous surfaces of masonry. It penetrates pores of surface and coats them with an insoluble substance which makes them fully water-repellent. Does not change texture nor discolor surface. Contains no paraffine	2.73	—	—	—
APPLICATION—Brush, Spray DRYING TIME—2 hours THINNER—None Required COVERAGE—125 to 275 Sq. Ft. per gallon depending on porosity of surface				
***DRIWAL (Silicone)**				
A transparent, water-repellent finish for exterior, above-ground brick, stone and masonry. Does the job in ONE COAT. Repels rain water from penetrating the pores. Resists efflorescence and staining. Masonry surfaces show no visible change in color or texture when treated with this material. Recommended for use on brick and mortar, concrete, cement-base paints, asbestos-cement combinations, sandstone, stucco and stones other than limestone. Not to be used on cinder block or other light weight aggregate concrete blocks with extremely porous surfaces. This invisible water-repellent coating contains silicone to combat masonry deterioration	3.33	—	—	—
APPLICATION—Brush, Spray DRYING TIME—2 hours THINNER—None Required COVERAGE—125 to 275 Sq. Ft. per gallon depending on porosity of surface				
ENAMELS				
See: Japalac; Ripolin; Speed-Wall Alkyd Flat; Speed-Wall Alkyd Semi-Gloss; Truck, Tractor and Machinery; Florenamel; Pli-Namel; SPRED Lustre				
ENAMEL UNDERCOATER				
See: Gliddencoat; Ripolin Undercoat				
***ENDURANCE BARN PAINT — No. 500 RED**				
A new, highest quality paint with excellent hiding power. It dries to a tough glossy film that withstands the rigors of the roughest weather. Provides long-lasting protection for barns, sheds, granaries, silos, water tank exteriors, storehouses, fences, etc. Use it on exterior wood and metal	3.23	1.08	—	—
APPLICATION—Brush, Spray DRYING TIME—Overnight; 36 hours for recoating THINNER—Mineral Spirits or Turpentine COVERAGE—550 Sq. Ft. per gallon				

* AVAILABLE IN 5-GAL. CANS
AT 15¢ PER GALLON LESS THAN 1-GAL. PRICES.

	Gals.	Qts.	Pts.	½ Pts.
***ENDURANCE EXTERIOR BASECOAT** Exterior primer for new wood and previously painted wood that is badly weathered or chalked. Use it to spot-prime bare spots resulting from peeling and flaking. Made from specially prepared oils to produce the elasticity, adhesion and control penetration necessary for finest exterior paint jobs. Can be tinted with Colors-in-Oil or DRAMATONE Tinting Colors. APPLICATION—Brush, Spray DRYING TIME—48 hours for recoating THINNER—Mineral Spirits or Turpentine COVERAGE—450 to 500 Sq. Ft. per gallon	5.38	1.62	—	—
***ENDURANCE HOUSE PAINT** Contains more heavy-bodied, pure linseed oil per gallon for longer life; pure white lead for added strength, water-resistance and extra durability; titanium for whiteness and hiding; zinc oxide to combat mildew; magnesium silicate for protection against cracking and checking. The exclusive Glidden formula makes this the finest, longest-lasting, self-cleaning exterior house paint manufactured. May be tinted with DRAMATONE Tinting Colors. APPLICATION—Brush, Spray, Roller DRYING TIME—16 hours; recoat in 72 hours THINNER—Mineral Spirits or Turpentine COVERAGE—550 Sq. Ft. per gallon				
Outside White No. 1800	5.38	1.62	.94	—
Tinting White No. 1804; Regular Colors and Black	5.38	1.62	—	—
Crylight Green No. 1828	5.88	1.74	—	—
***ENDURANCE HOUSE PAINT** **MILDEW & FUME-RESISTANT** A deluxe, lead-free Super White House Paint—ideal for the finest homes. Excellent for exterior wood, masonry and metal in any climate. A Non-Staining House Paint that stays white and bright for years. Especially suited for industrial areas, where homes are subjected to chemical fumes, heavy smog and smoke. Its lead-free formulation makes it ideal for farm buildings and fences. Combats mold, mildew and the roughest year-round weather. APPLICATION—Brush, Spray DRYING TIME—16 hours; 72 hours for recoating THINNER—Mineral Spirits or Turpentine COVERAGE—Up to 550 Sq. Ft. per gallon	5.38	1.62	—	—
ENDURANCE HOUSE PAINT, PASTEL COLORS Pastel colors are easily obtained by tinting existing colors of ENDURANCE HOUSE PAINT or ENDURANCE TINTING BASE WHITE No. 1804, with DRAMATONE Tinting Colors. See ENDURANCE HOUSE PAINT Color Card				
***ENDURANCE IMPERIAL ONE-COAT** **WHITE HOUSE PAINT (Alkyd Fortified)** Premium quality white exterior paint. Gives extra hiding and coverage with its built-in second coat. Has depth and richness of enamel. Easy brushing. Once over is enough with this amazing one-coat paint! Fortified with alkyds to give extra durability and lasting beauty. APPLICATION—Brush, Spray DRYING TIME—48 hours THINNER—Mineral Spirits or Turpentine COVERAGE—550 Sq. Ft. per gallon	6.13	1.81	—	—

* AVAILABLE IN 5-GAL. CANS
AT 15c PER GALLON LESS THAN 1-GAL. PRICES.

Glidden

	Gals.	Qts.	Pts.	½ Pts.
ENDURANCE SHINGLE AND SHAKE STAIN				
ENDURANCE SHINGLE AND SHAKE STAIN colors are made by mixing two parts ENDURANCE HOUSE PAINT with one part BLENDING LIQUID. This combination makes an ideal finish for use on grained cedar shakes, wood shingles, rough surfaced cedar, redwood and fir—on porous, rough or hand-split siding, fences, barns, and rough structures that have weathered a long time. ENDURANCE SHINGLE AND SHAKE STAIN embodies the finest quality paint pigments dispersed and blended in a strong wood preservative liquid that holds color after long exposure. It also acts as a protective finish against dry rot, decay, moisture and insects. ENDURANCE SHINGLE AND SHAKE STAIN penetrates deeply into the wood to retard warping, curling and splitting. It combats the roughest weather for many years. For combination prices, SEE: ENDURANCE HOUSE PAINT AND BLENDING LIQUID.				
APPLICATION—Brush, Dip, Spray DRYING TIME—16 hours; 48 hours for recoating COVERAGE—Approx. 300 Sq. Ft. per gallon depending on type of surface				
***BLENDING LIQUID**				
BLENDING LIQUID is a combination of treated oils and solvents specially formulated to be mixed with ENDURANCE HOUSE PAINT and TRIM AND SHUTTER COLORS. This combination produces ENDURANCE SHINGLE AND SHAKE STAIN, a quality preservative finish available in many modern colors	2.38 (4 Per Case)	.87	—	—
ENDURANCE TRIM AND SHUTTER COLORS				
Beautiful, deep, rich colors, designed to harmonize with ENDURANCE HOUSE PAINT colors. These colors hold their brilliance and weather-resisting luster on wood, metal, brick and concrete. Excellent also for use on store fronts, ornamental grill work, trellises, porch and lawn furniture, etc.				
‡Shutter Red No. 108. Deep Turquoise No. 150	8.83	2.48	1.37	—
‡Light Yellow No. 37	7.03	2.03	1.15	—
Shutter Green No. 71	6.18	1.82	1.04	—
Chestnut Brown No. 92; Dark Blue No. 158	5.33	1.61	.94	—
Trim White No. 82	5.68	1.69	.98	—
‡To be discontinued when stocks are exhausted.				
APPLICATION—Brush, Spray DRYING TIME—24 hours; 48 hours for recoating THINNER—Mineral Spirits or Turpentine COVERAGE—Approx. 550 Sq. Ft. per gallon				
EUSTON WHITE LEAD		(PRICES UPON REQUEST)		
***EVERON HOUSE PAINT (White)**				
An excellent paint that stays clean and bright because of its special formula which provides controlled chalking. A superior finish for all wood surfaces exposed to weather and changing climatic conditions. Resists fumes in industrial areas! EVERON HOUSE PAINT brushes easily, penetrates deeply when used as a primer, adheres tenaciously as a finish coat, dries with an elastic, high gloss finish that remains firm and durable. EVERON is truly the economical HOUSE PAINT	4.43	1.38	—	—
APPLICATION—Brush, Roller, Spray DRYING TIME—16 hours; recoat in 48 hours THINNER—Mineral Spirits or Turpentine COVERAGE—550 Sq. Ft. per gallon				

* AVAILABLE IN 5-GAL. CANS AT 15c PER GALLON LESS THAN 1-GAL. PRICES.

	Gals.	Qts.	Pts.	½ Pts.
FARM BUILDING PAINTS				
For Exteriors—See: Endurance Paints, Metallite, SPRED Glide On, Nev-A-Rust, Stock Farm White				
For Interiors —See: SPRED Products; Maintenance Finishes Section				
FENCE PAINTS				
See: Stock Farm White; Metallite; Nev-A-Rust				
FILLER, WOOD				
See: Glid-Tone Wood Filler				
FLOOR FINISHES				
See: Pli-Namel; Florenamel; Penetrex; Glid-Tone Gloss Varnish				
FLOOR WAX				
See: Glidden Paste Wax; Glid-N Floor Wax				
***FLORENAMEL (Alkyd)**				
An alkyd enamel with extra durability, for use on porches, floors of wood and concrete, canvas decks, railings—inside and outside. Will not waterspot; standing pools of water do not affect it. FLORENAMEL gives concrete basement floors and walls a mirror-like enamel finish. It's scrubbable. FLORENAMEL is made to take the roughest wear and weather. May be tinted with DRAMATONE Tinting Colors. All colors	4.78	1.47	—	—
APPLICATION—Brush, Spray DRYING TIME—12 hours THINNER—Turpentine or Mineral Spirits COVERAGE—500 to 600 Sq. Ft. per gallon				
***GLIDDENCOAT (White Enamel Undercoat)**				
A perfect enamel undercoat for woodwork. Produces a fine opaque film to hold out succeeding coats of finishing enamel, making it possible to secure full luster and depth of gloss. Works easily, flows evenly without showing brush marks and requires only light sanding. Can be tinted with colors in oil or DRAMATONE Tinting Colors	4.38	1.37	.82	.53
APPLICATION—Brush, Spray DRYING TIME—Overnight for sanding and recoating THINNER—Mineral Spirits or Turpentine COVERAGE—500 Sq. Ft. per gallon				
GLIDDEN PASTE WAX				
For furniture, floors and automobiles; in fact, any surface where a wax finish is desired. It polishes quicker and easier than other similar products and will retain its gloss and finish over a period of several months. It dries hard and imparts longer protection to floor surfaces even when subjected to extreme hard usage	4 lbs. †2.06	1 lb. † .60	—	—
APPLICATION—Cloth or Applicator				
GLIDDENSPAR VARNISH				
The finest interior-exterior spar varnish. Has extreme resistance to exposure, water and acids. Recommended for exterior surfaces such as doors, porch ceilings and those places inside the home which are subjected to water and exposure, such as window sills	5.58	1.67	.97	.60
APPLICATION—Brush DRYING TIME—8 hours; 48 hours for recoating THINNER—Mineral Spirits or Turpentine COVERAGE—650 Sq. Ft. per gallon				
GLIDE-ON, SPRED				
See: SPRED Products Section				

* AVAILABLE IN 5-GAL CANS AT 15c PER GALLON LESS THAN 1-GAL. PRICES.

† SUPPLIED IN FULL CASES OR BOXES ONLY. NOT SUBJECT TO FULL CASE ALLOWANCE.

GLD026164

Glidden

	Gals.	Qts.	Pts.	½ Pts.
GLID-N FLOOR WAX (Liquid) For use on all types of floors. Dries to a gloss finish without polishing. The hard wax film resists wear, keeps dirt on surface where it can be removed easily with a stiff brush or damp mop. Resists water. Scrubbable	2.38 (6 Per Case)	.73 (12 Per Case)	—	—
GLID-N LIQUID CLEANER (Detergent) An excellent degreaser as well as cleaner. Does a remarkably easy job on walls, woodwork, floors, linoleum, tile, windows, dishes, mirrors and automobiles. Dries free from streaks. Harmless to the skin. Requires only two to three teaspoonsful to a gallon of water	2.88	.85 (12 Per Case)	.55 (12 Per Case)	—
GLID STRIP (Non-Flammable) **Wash Away Paint and Varnish Remover** A non-flammable, water-flush paint and varnish remover that stays wet longer and permits working on larger areas. Has less tendency to run and sag on upright surfaces due to its heavy body. Easy to use. Just brush it on, wait a few minutes, then wash it off with water. GLID STRIP also acts as a cleaner for old, hardened nylon and pure bristle paint and varnish brushes. Will soften latex paints for easy removal	4.63 (6 Per Case)	1.44 (12 Per Case)	.83 (12 Per Case)	.55
***GLID-TITE GALVANIZED IRON PRIMER** A primer for all galvanized metal, plymetal, galvaneal, or treated metal surfaces. The metal requires no previous etching with acids. Excellent for use on new eave troughs and gutters. Finish coat adhesion is better if application is thin rather than heavy APPLICATION—Brush DRYING TIME—Overnight; 72 hours for recoating THINNER—Turpentine or Mineral Spirits COVERAGE—Up to 600 Sq. Ft. per gallon	4.18	1.32	—	—
GLID-TONE CRYSTALACQ (Brushing Lacquer) A crystal clear, quick-drying, water- and wear-resistant lacquer finish for brush application. Easy to use. Excellent for floors, woodwork, furniture, linoleum, etc. APPLICATION—Brush DRYING TIME—1 to 6 hours, depending on surface THINNER—Glid-Tone Crystalacq Reducer COVERAGE—300 Sq. Ft. per gallon	4.78	1.47	.88	—
GLID-TONE CRYSTALACQ REDUCER Special Thinner for Crystalacq	—	—	.67	—

* AVAILABLE IN 5-GAL. CANS AT 15c PER GALLON LESS THAN 1-GAL. PRICES.

GLD026165

Glidden

	Gals.	Qts.	Pts.	½ Pts.
GLID-TONE GLOSS VARNISH A deluxe, general-purpose interior varnish. Phenolic ether resins give it extreme abrasion resistance, durability, and lasting beauty. Excellent on all interior wood surfaces, bar and tabletops, woodwork, furniture and floors. Especially suitable over newly stained woodwork where GLid-Tone Stains have been applied. May be rubbed APPLICATION—Brush DRYING TIME—6 to 8 hours THINNER—Mineral Spirits or Turpentine COVERAGE—650 Sq. Ft. per gallon	5.43	1.63	.95	.60
GLID-TONE SATIN-SHEEN VARNISH A new satin sheen varnish that dries free from all cloudiness and preserves the natural beauty of the wood. Excellent for use over GLID-TONE stains and for all interior work where a dull finish or rubbed effect is desired. Sufficiently pale for use over light modern stains. DO NOT USE ON FLOORS APPLICATION—Brush DRYING TIME—2 hours THINNER—Mineral Spirits or Turpentine COVERAGE—650 Sq. Ft. per gallon	4.78	1.47	.88	.56
GLID-TONE SPAR VARNISH Extra durable spar varnish for exterior surfaces exposed to weather. Recommended as the finest varnish available for exterior use — spars, hulls, decks, house sidings, paneling, porch ceilings, outdoor furniture, etc. Makes perfect finish over Glid-Tone Stain on exterior surfaces APPLICATION—Brush DRYING TIME—8 hours; 48 hours for recoating THINNER—Mineral Spirits or Turpentine COVERAGE—650 Sq. Ft. per gallon	5.88	1.74	1.00	.62
GLID-TONE WOOD STAIN An all-purpose, pigmented wiping stain for all types of wood, plywood and veneer, exterior and interior surfaces. Especially suitable for knotty pine wood paneling in recreation rooms. Excellent for use on new or old furniture, woodwork, cabinets, wall paneling and floors. GLID-TONE Stain heightens the beauty of the wood grain. Holds color evenly. May be coated with varnish, shellac or lacquer. May be tinted with DRAMATONE Tinting Colors to produce additional beautiful colors. APPLICATIONS—Wiping Cloth, Brush DRYING TIME—12 hours THINNER—Glid-Tone Stain Reducer	Stains, All Colors 3.43 Glid-Tone Stain Reducer ‡2.23 ‡6 Per Case	1.13 .84	.71 .55	.47 .40
GLID-TONE WOOD BLEACH Has the amazing properties of bleaching practically any type of wood from its original color to an almost natural white and without any deposit of a salt of any kind in the pores of the wood, necessary to the production of the blond effects so popular and modern at present. Available in two size units. Large unit consists of 1 gallon of No. 1 Solution and 1 quart of No. 2 Solution. Small unit consists of 1 quart of No. 1 Solution and ½ pint of No. 2 Solution APPLICATION—Mop, Cloth, Waste DRYING TIME—12 hours or more	Large Unit †6.80	Small Unit †2.50	—	—

† SUPPLIED IN FULL CASES OR BOXES ONLY.
NOT SUBJECT TO FULL CASE ALLOWANCE.

GLD026166

	Gals.	Qts.	Pts.	½ Pts.	
GLID-TONE WOOD FILLER For use on all open-grained wood such as oak, chestnut, walnut and mahogany. Has pure silex base and will not shrink or break away from the pores of the wood when dry. Furnished in paste form. Must be reduced with naphtha or turpentine. APPLICATION—Brush, Cloth THINNER—Turpentine, Naphtha	3.48	1.14	—	.48	
GLOSS FINISHES See: Speed-Wall; Japalac; Ripolin; Florenamel					
GYMNASIUM FLOOR FINISH See: Penetrex; also See: Maintenance Finishes Section					
HEAT RESISTING ALUMINUM See: Metallite					
HOUSE PAINT See: Endurance Paints; SPRED Glide-On; Everon					
IRON PRIMER See: Glid-Tite Galvanized Iron Primer; Liquid Red Lead					
IMPERIAL ONE-COAT WHITE HOUSE PAINT **(Alkyd Fortified)** See: Endurance Imperial					
INTERIOR ALUMINUM See: Metallite Interior Chrome Finish					
JAPALAC SCREEN AND IRON ENAMEL Gloss black, solid-covering enamel for exterior screens, wood and metal sash, wrought iron, decorative lamps, etc. Also ideal for interior ironwork, pipes, grills, furnaces, stoves, heaters, andirons, etc. Will not clog screen mesh. Resists weather and protects metal from rusting. APPLICATION—Brush, Spray or Special Applicator DRYING TIME—6 to 8 hours THINNER—Mineral Spirits or Turpentine COVERAGE—600 Sq. Ft. per gallon	3.03	1.03	.65	.45	
JAPALAC ENAMEL **Quick-Drying, Alkyd Gloss** An extra-durable, alkyd enamel in brilliant colors that cover in ONE COAT. Bright hues and muted tones give new life and sparkle to old surfaces—walls, ceilings, woodwork and furniture. JAPALAC Quick-Drying Alkyd Enamel is formulated for the finest enameling inside and outdoors. It looks, wears and washes like baked enamel. Colors may be tinted with DRAMATONE Tinting Colors. Ultra White, Brilliant Black, Flat Black and Colors APPLICATION—Brush, Roller, Spray DRYING TIME—4 to 6 hours; 24 hours for recoating THINNER—Mineral Spirits or Turpentine COVERAGE—Approx. 500 Sq. Ft. per gallon	6.03	1.80	1.03	½ Pts. .63	* ¼ Pts. .40

* THIS SIZE TO BE DISCONTINUED WHEN ALL STOCKS ARE EXHAUSTED.

	Gals.	Qts.	Pts.	½ Pts.
JAPALAC SPRAY ENAMEL In Ready-To-Spray Cans All-purpose, interior-exterior enamel is pressurized, aerosol cans ready for immediate spraying. Extra-durable, quick-drying enamel of brilliant beauty. Gives professional appearance to porch and lawn furniture, bicycles, toys, tables, chairs, etc. Ideal for wickerwork. Colors match regular JAPALAC Alkyd Enamel colors. In addition, JAPALAC SPRAY ENAMEL is available in ready-to-spray Interior-Exterior Aluminum, rich Gold, and a clear finish. White, Colors, and Clear APPLICATION—Spray DRYING TIME—Ten minutes	12 Av. Oz. Cans 1.01 (6 Per Case)	—	—	—
JAPALAC VARNISH STAIN Stains and varnishes in one operation. Dries quickly, to a high lustre. For use on furniture, woodwork and floors. Unusually waterproof. APPLICATION—Brush, Spray DRYING TIME—4 to 6 hours; 24 hours for recoating THINNER—Mineral Spirits or Turpentine COVERAGE—600 Sq. Ft. per gallon	4.38	1.37	.82	.53
***JAPAN DRIER** A top quality drier for use in drying oil and linseed oil paints. It is made from hard gums. Very popular with professional painters. Two and one-half gallons are enough for fifty gallons of oil.	2.38 (6 Per Case)	.87	.57	.41
LACQUER See: Glid-Tone Crystalacq (Brushing Lacquer)				
LATEX PAINTS See: SPRED Products Section				
LINOLEUM COATING See: Glid-Tone Crystalacq				
LINSEED OIL		(PRICES UPON REQUEST)		
LIQUID CLEANER See: Glid-N Liquid Cleaner				
***LIQUID RED LEAD (Modified)** Recommended whenever a shop coat of red lead is specified. Comes ready to apply, is extremely elastic and is an excellent rust preventative. APPLICATION—Brush, Spray DRYING TIME—16 hours; 48 hours for recoating THINNER—Mineral Spirits or Turpentine COVERAGE—500 to 600 Sq. Ft. per gallon	5.93	1.76	1.01	.63
LIQUID WAX See: Glid-N Floor Wax				
MACHINERY ENAMEL See: Truck, Tractor and Machinery Enamel; Japalac				
MASONRY FINISHES See: Clear Driwall; Silicone Driwal; SPRED Glide-On				

* AVAILABLE IN 5-GAL. CANS AT 15c PER GALLON LESS THAN 1-GAL. PRICES.

GLD026168