GALLON REGISTERE
REG'N. No. 3373
DATE 4-27-6
O'BRIEN®
"75"®
HOUSE PAINT
FOR ANY EXTERIOR SURFACE
TRIM & TINTING
WHITE
MADE BY THE O'BRIEN CORPORATION
MORE, MD. • OKLAHOMA CITY, OKLA. • SAN FRANCISCO, CAL. • LOS ANGELES, CAL.

N21570

"75" HOUSE PAINT

"75" House Paint made with special Pre-Shrunk Thermolyzed Oils looks better longer on exterior wood siding, trim and shingles or brick, metal and masonry.

"75" PRIMING WHITE — Low lustre primer for use under "75" House Paint or "75" Tinting White. (Not recommended for use under "75" Trim Colors.)

"75" TINTING WHITE — Non-chalking finish for body or trim. Tint with Tone-All, Oil Colors, or by intermixing.

DIRECTIONS

Preparation — Surface must be clean and dry. Remove loose paint. Ventilate behind siding, repair flashings and structural defects.

New Unpainted Surfaces

Apply one or two coats of "75" House Paint at package consistency — AFTER PRIMING AS FOLLOWS:

WOOD: Apply one coat of "75" Priming White, thinned with two or three pints of linseed oil per gallon. Tint toward finish color. For light colors, tint with Tone-All or Oil Colors. For dark colors, mix one-half Primer and one-half House Paint (not Trim) finish color.

MASONRY: Apply one coat O'Brien A-R Primer. Tint with Tone-All.

METAL: Apply one coat of Flexico Metal Primer. Etch galvanized metal, such as gutters and downspouts, before priming.

Previously Painted Surfaces

Apply one coat of "75" House Paint at package consistency. (Over badly weathered surfaces, prime with "75" Priming White at package consistency.)

Application—Apply by brush or spray at temperature not less than 60° F. Allow 48 hours good drying weather between coats. Clean brushes and tools with turpentine or mineral spirits. Stir well before and during use.

"75" TRIM Colors and TRIM White

Recommended for trim **only**, such as frames, shutters, trellis, doors, etc. Over previous paint, apply at package consistency. Over new surface, apply two coats, thinning first coat 10% with turpentine or mineral spirits. Allow 48 hours good drying weather between coats.

DO NOT TAKE INTERNALLY

CAUTION! COMBUSTIBLE! CONTAINS LEAD. HARMFUL IF SWALLOWED. Keep away from heat and open flame. Do not apply on window sills, toys, furniture or interior surfaces of rooms which may be used by children. Avoid prolonged contact with skin and breathing of vapor or spray mist. Close container after each use. Use with adequate ventilation. KEEP OUT OF THE REACH OF CHILDREN.

75 HOUSE PAINT TRIM AND TINTING WHITE

Pigment		56.68%
Titanium Dioxide	24.03%	
18% Leaded Zinc Oxide	38.96%	
Silicates	37.01%	
	100.00%	
Vehicle		43.32%
Raw Linseed Oil	44.10%	
Heat Treated Linseed Oil	27.35%	
Thermolyzed Tung Oil	2.74%	
Mineral Spirits & Driers	25.81%	
	100.00%	

"Be Sure The Paint You're Buyin' Is O'Brien"

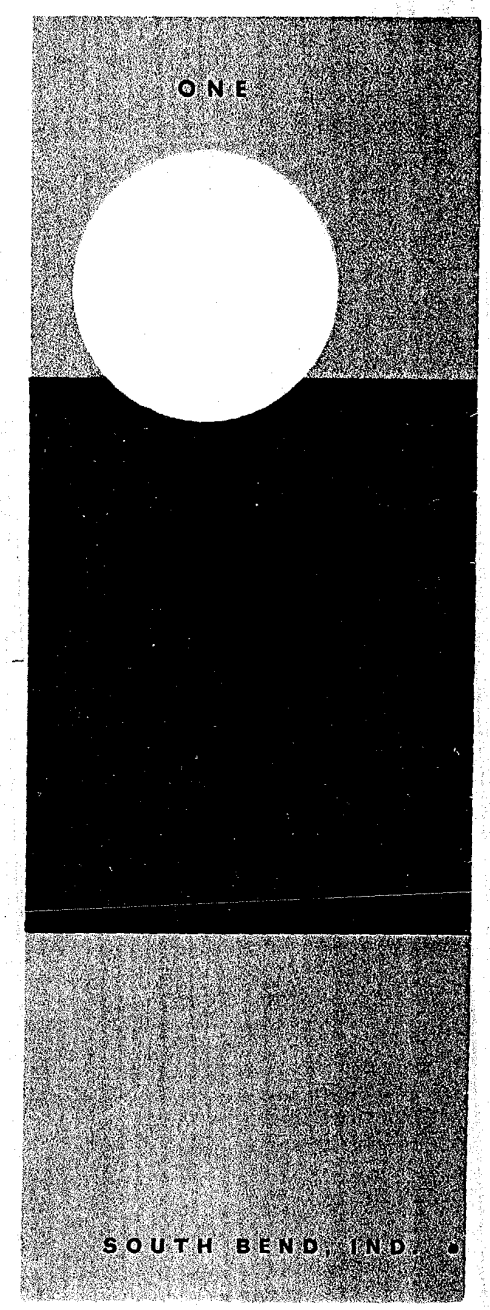

49 TOC 001674



49 TOC 001675

"75" HOUSE PAINT

"75" House Paint made with special Pre-Shrunk Thermolyzed Oils looks better longer on exterior wood siding, trim and shingles or brick, metal and masonry.

"75" PRIMING WHITE — Low lustre primer for use under "75" House Paint or "75" Tinting White. (Not recommended for use under "75" Trim Colors.)

"75" TINTING WHITE — Non-chalking finish for body or trim. Tint with Tone-All, Oil Colors, or by intermixing.

DIRECTIONS

Preparation — Surface must be clean and dry. Remove loose paint. Ventilate behind siding, repair flashings and structural defects.

New Unpainted Surfaces

Apply one or two coats of "75" House Paint at package consistency — AFTER PRIMING AS FOLLOWS:

WOOD: Apply one coat of "75" Priming White, thinned with two or three pints of linseed oil per gallon. Tint toward finish color. For light colors, tint with Tone-All or Oil Colors. For dark colors, mix one-half Primer and one-half House Paint (not Trim) finish color.

MASONRY: Apply one coat O'Brien A-R Primer. Tint with Tone-All.

METAL: Apply one coat of Flexico Metal Primer. Etch galvanized metal, such as gutters and downspouts, before priming.

Previously Painted Surfaces

Apply one coat of "75" House Paint at package consistency. (Over badly weathered surfaces, prime with "75" Priming White at package consistency.)

Application—Apply by brush or spray at temperature not less than 60° F. Allow 48 hours good drying weather between coats. Clean brushes and tools with turpentine or mineral spirits. Stir well before and during use.

"75" TRIM Colors and TRIM White

Recommended for trim **only**, such as frames, shutters, trellis, doors, etc. Over previous paint, apply at package consistency. Over new surface, apply two coats, thinning first coat 10% with turpentine or mineral spirits. Allow 48 hours good drying weather between coats.

DO NOT TAKE INTERNALLY

CAUTION! COMBUSTIBLE! CONTAINS LEAD. HARMFUL IF SWALLOWED. Keep away from heat and open flame. Do not apply on window sills, toys, furniture or interior surfaces of rooms which may be used by children. Avoid prolonged contact with skin and breathing of vapor or spray mist. Close container after each use. Use with adequate ventilation. KEEP OUT OF THE REACH OF CHILDREN.

75 HOUSE PAINT PRIMER — WHITE

Pigment	56.47%
Titanium Dioxide	27.59%
Basic Silicate White Lead (48% PbO Type)	13.79%
Calcium Sulphate	27.59%
Silicates	31.03%
	100.00%
Vehicle	43.53%
Heat Treated Linseed Oil	24.43%
Raw Linseed Oil	27.46%
Ester Gum	2.90%
Mineral Spirits and Driers	45.21%
	100.00%

"Be Sure The Paint You're Buyin' Is O'Brien"

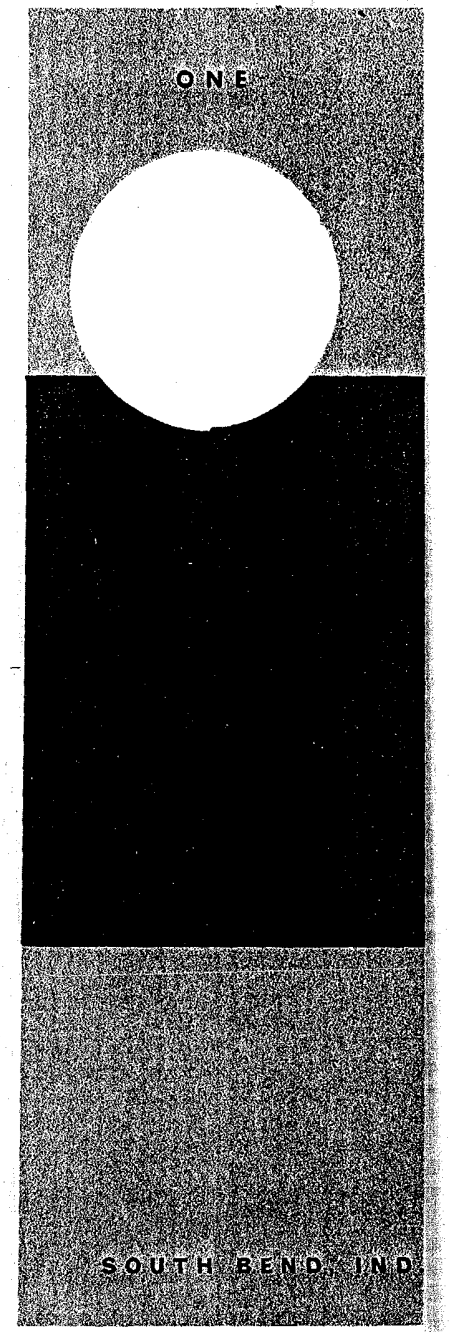

49 TOC 001676