



INDEPENDENT LABORATORY TESTING SERVICES—SINCE 1934

To The Air Conditioning Industry and its Suppliers...

EQUIPMENT TYPES	TEST METHOD	TEST CAPABILITY	SPECIFICATIONS & STANDARDS
• ROOM UNITS, including Heat Pump Operated	CALORIMETRIC	36,000 Btu/hr. Heating or Cooling To 0°F Outdoor Side	ASHRAE 16 NEMA CN-1
• UNITARY, including Heat Pump Operated	CALORIMETRIC or PSYCHROMETRIC	36,000 Btu/hr. Heating or Cooling To 0°F Outdoor Side	ASHRAE 37 ASHRAE 49 ARI 210 ARI 250 ARI 240
• UNITARY, including Heat Pump Operated	PSYCHROMETRIC	135,000 Btu/hr. Heating or Cooling To 0°F Outdoor Side	ASHRAE 37 ASHRAE 49 ARI 210 ARI 240 ARI 250
• REFRIGERATORS and FREEZERS	_____	8 Units at a time, automatically programmed	ASA B-38.1 ASA B-38.2 ASA B-38.3 NEMA HRF 1
• HUMIDIFIERS	_____	_____	_____
• DEHUMIDIFIERS	_____	_____	NEMA DHI
• WATER COOLERS	_____	_____	ASRE 18 ARI 1010
• AIR FILTERS Unit and Panel Types	AFI NBS	_____	AFI Sect. 1
• BASEBOARD HEATERS	_____	Electric	NEMA HE2
• BASEBOARD RADIATION	_____	Steam and Hot Water	IBR
• CONVECTORS	_____	Any Type	CS 140-47
• ENVIRONMENTAL and OTHER TESTS TO MILITARY and FEDERAL SPECIFICATIONS			
• POWER SOURCES—DC or AC at any commercial frequency or voltage, single or three phase—3 or 4 wire.			



It pays
to KNOW by **ETL TEST**

Write for
ETL Bulletin 101
"A Listing of
Services and Facilities"



ELECTRICAL TESTING LABORATORIES, INC.

2 East End Avenue at 79th Street • New York 21, N. Y. • BUtterfield 8-2600


CHEMICAL • ELECTRICAL • ELECTRONIC
PHYSICAL • MECHANICAL • ENVIRONMENTAL
INCLUDING INFRARED SPECTROSCOPY, PHOTOMETRY, RADIOMETRY, SPECTROPHOTOMETRY AND PHOTOMICROGRAPHY



TESTING • INSPECTION
CERTIFICATION

Whatever you call it...

EXPANSION JOINT
PUMP CONNECTOR
FLEXIBLE COUPLING
SOUND ISOLATOR
BELLOWS
FLEXIBLE CONNECTOR

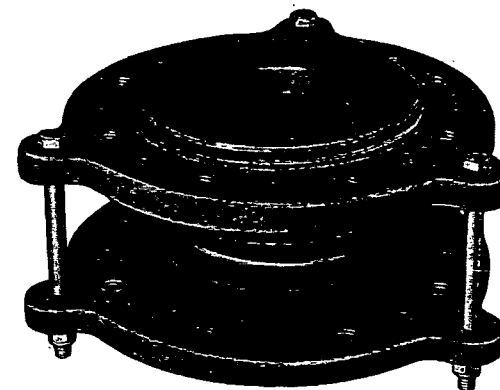

... this device solves tough piping problems with unmatched reliability. That's because it's contour molded of black Teflon* by Resistoflex's patented process which makes it non-aging, corrosion-proof and provides it with extraordinary flex life. It is rated for use from -100F to +450F at pressures to 160 psi, has a 4 to 1 safety factor, is available in 1" to 10" sizes. Flanges are drilled and tapped for both standard ASA and Corning Style 2 installations. Chemical, pharmaceutical, paper and air conditioning industries have different names for it. When buying or specifying be sure to use our name Resistoflex Fluoroflex*T Bellows.

RESISTOFLEX

Leading distributors carry Resistoflex Fluoroflex-T Bellows in stock. For complete technical information write Resistoflex Corporation for Bulletin B-4.

*Fluoroflex is a Resistoflex trademark. Teflon is a Du Pont trademark.

PLANTS: Roseland, New Jersey • Anaheim, California • Dallas, Texas. SALES OFFICES: Atlanta • Chicago • Cleveland • Dayton • Houston • Kansas City • Philadelphia • San Diego • Seattle • Syracuse • Washington