





THICK BLOKS and TAPERED BLOKS

Specifications Arranged by Width for Identifications,
Refer to Block Diagrams.

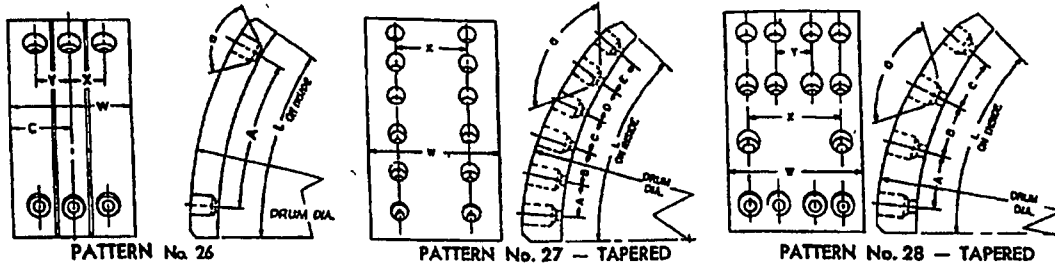

Pattern No.	Drum Diam.	W	X	Y	L	A	B	C	D	E	F	Counter-bore Angle	ABB-FMS Set No.
10" Width													
26	14 1/4	10	3	3	6 3/4	4.538	—	5	—	—	—	82°	4592AD
4" & 5" Width													
27 (4 pcs.)	20 1/4	4	2 1/4	—	9 1/2	.805	.904	.910	1.723	2.241	—	82° CAM.	4636D
32	20 1/4	4	2 1/4	(See Specs. under Pattern 32)	—	—	—	—	—	—	—	82° ANC.	—
27	20 1/4	4	3	—	9 1/4	1.378	1.205	1.377	1.894	1.894	—	150°	4601AD
27 (4 pcs.)	20 1/4	5	3 1/4	—	11 1/4	1.810	1.810	1.723	1.810	1.810	—	150° CAM.	4470D
27 (4 pcs.)	20 1/4	5	3 1/4	—	10 3/4	1.723	1.723	1.723	1.723	1.723	—	150° ANC.	—
27	20 1/4	5	3 1/4	—	11 1/4	1.896	1.896	1.896	1.896	1.896	—	150°	4628D
7" Width													
28	17	7	5 1/4	3 1/4	7 1/4	2.157	2.732	1.582	—	—	—	150°	4611D

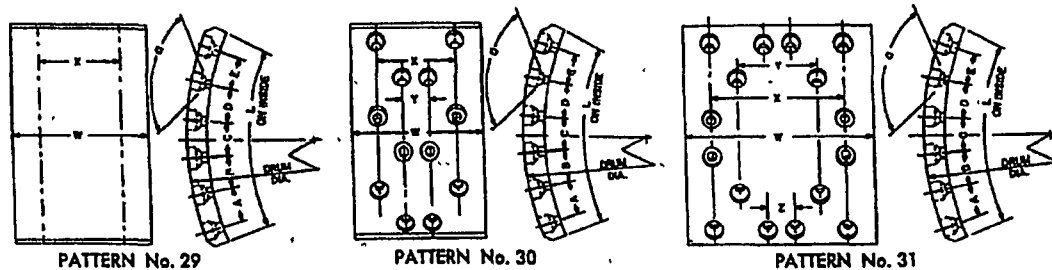

29	12	6	3 1/4	—	11	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	—	82°	4344BD
6" Width													
7-1/2" Width													
30	20	7 1/4	5 1/4	2 1/4	10 3/4	.807	2.825	.807	2.825	.807	—	82°	4622D
8-5/8" Width													
31 (Z=1 1/4)	25 1/4	9	7 1/4	4 1/4	14	1.814	1.814	1.814	1.814	1.814	—	82°	4624D

SPNY 001573