

CG 03 CODE KY-781-D PKG. _____

→ FEB 12 34344

EST. WGT. 1128 LBS.

STD. HRS. _____ TIME 7 P M

14 YC-3-B 93 4 24409 2.000 #

14 YC-3-B 93 4 24403 1.300 #

14 YC-3-B 93 4 _____ #

Total Wgt. 4428# (Req _____)


PROCESSES	APPROVED BY
() KY-781-D (N)	FWP 101378
() ()	AMJ 101378
() ()	
() ()	
TYPED BY	
emw101378	


PUNCHED & CHECKED
MAR 1 1967

QUIPMENT	NAME: KROLOR® YELLOW LIGHT	USE LBS.	N CODE	ACCT. LBS.
203 & 205	1 Run 60" (992 G) water in V-203 & add	Assume 50%	36	7-D 18
	2 Weigh in drum & pour in		442	32-D 442
1	3 Dump in & stir 5 min	Lot	66 x 50	YC-3-B 3300
	Record: Start 12.40 PM	24409	2.00	
	Fin 2.00 PM	24403	1.300	
	75" (12756) (2400-2600)			
	4 Adj to 80" (1360 G) & Record: pH (10.5-11.5)			
	5 Pump V-203 thru Homog # 4 at 1800-2200 psi into V-205			
	6 When V-203 MTY wash color thru Homog at 1800-2200 psi using minimum water			
	7 Record: V-205 Vol " & adj to 45" (1662 G)			
	8 Inspect Homog strainer & clean if necessary			
205 & SV	9 Run 12" (200 G) water into SV & start agitator			
2	10 Pump V-205 thru Homog at 4800-5200 psi into V-244			
	Record: Time Start 12.05 PM Total Min 160			
	NOTE: If Homog pressure falls below 4800 psi, 3-way valve will recirculate slurry to V-205			
	11 When V-205 MTY, run in 5" (240 G) water and pump thru Homog at 4800-5200 psi			
SP & CP	12 SP Step 01 - Set Formula Selector to position #1 (V-243) or #6 (V-244)			
3	13 Press SV Cam Reset PB-Set 22TC in Auto Remote (Temperature is set at 190-194°F)			
	14 Record levels and set Raw Material Counter #1 as follows:			
	a) 11LG 42% - preset #3 187 Gal		15-A	374
	15 Set strike flow controllers as follows:			
	a) 3FC10 (N-27-D Controller) in Manual 0.9 GPM		27-D	373
	b) 3FC20 (N-27-D Water) in Manual Local 6.3 GPM			
	c) 3FR10 (N-27-D / Water Ratio) 0.7			
	d) 8FC10 (N-32-D Controller) in Manual 1.20 GPM		32-D	2527
	e) 8FC20 (N-32-D Water) in Manual Local 5.4 GPM			
	f) 8FC20 (N-32-D Water) in Remote			
	g) 8FR10 (N-32-D / Water Ratio) 0.9			
SV & SP	16 Operator Step PB			
CP	17 Record Level 2LG 56%. If below 35% follow solution make-up procedure for N-27-D			
4	18 Adj SV to 54" (2800 G)			
	19 Record: pH 7.6			
	20 Adj pH to 11.4-11.6 using Assume 50%	3.2	7-D	16
	(Dilute to 5% (10 parts water to 1 part N-7-D)			
	Siphon into SV. Record: pH 11.5			
	21 Operator Step PB			

V244

EQUIPMENT		PAGE 2 CG 03 CODE KY-781-D N EST. WGT. 1128 LBS.	USE LBS.	N CODE	ACC LBS.
SV	22	SP Step 06/39. After heat up Record: pH 9.8 (9.6-10.2)			
SP	23	Switch 3FC20, 8FC10, 8FC20, to Auto			
&	24	Operator Step PB			
CP	25	SP Step 10.43 - When 3FC20, 8FC10, 8FC20 water flow in limits switch 3FC10 to Auto. Operator Step PB			
5	26	SP Step 11/44 - When 3FC10, 3FC20, flow in limits, switch 3FC20 to Remote. Operator Step PB			
	27	During Strike, Record pH & Time as follows:			
		SP Step pH Range Time 6:55			
		13/41 (30 min) 9.8 9.3-10.0 7:25			
		14/47 (60 min) 9.8 9.3-10.0 7:55			
		(2 hrs) 9.8 9.3-10.0 8:55			
		(3 hrs) 9.8 9.3-10.0 9:55			
		17.50 (Final) 8.3 7.5-8.5 10:40			
		NOTE: If pH not as specified notify Supervisor & note in log. If final pH is above (8.5) Adj to pH 7.5-8.5			
		M % 27-D			
V-302	28	Add 31" (379 G) water to V-302			
6	29	Add & stir 5 min Assume 50% 124 7-D 62			
SV	30	SP Step 17/50 after checking pH. Operator PB			
SP	31	SP Step 23/53 Record: pH 3.2 (3.3-3.7)			
&	32	If necessary adj pH (DOWN ONLY) Record: pH		15-A	
CP		NOTE: Dissolve extra N-15-A in water at 110-120°F in drum Use ±30 Gal of water to 50# N-15-A. Stir SV 5 min after each addition			
7	33	Sift in 150 128-A 150			
	34	Run in N-7-D from S 29 & stir 5 min			
	35	Record: pH 4.4 (4.2-4.4)			
	36	If necessary adj pH to (4.2-4.4) with dilute N-7-D (10 parts H ₂ O to 1 part N-7-D) or N-27			
		M % 27-D			
		Assume 50% 7-D			
		Siphon (if N-7-D) into SV. Record: pH			
	37	Operator Step PB			
	38	SP Step 24/54 - Add N-978-A & stir 15 min 20 978-A 20			
	39	Operator Step PB			
	40	SP Step 60 - Batch Complete			
		START FIN OPTR			
		TIME SP STEP TIME SP STEP			
		7:00AM 12:05PM 3:PM 409 54-323			
		3:00pm 11:00pm 11:40PM 101 144-244			

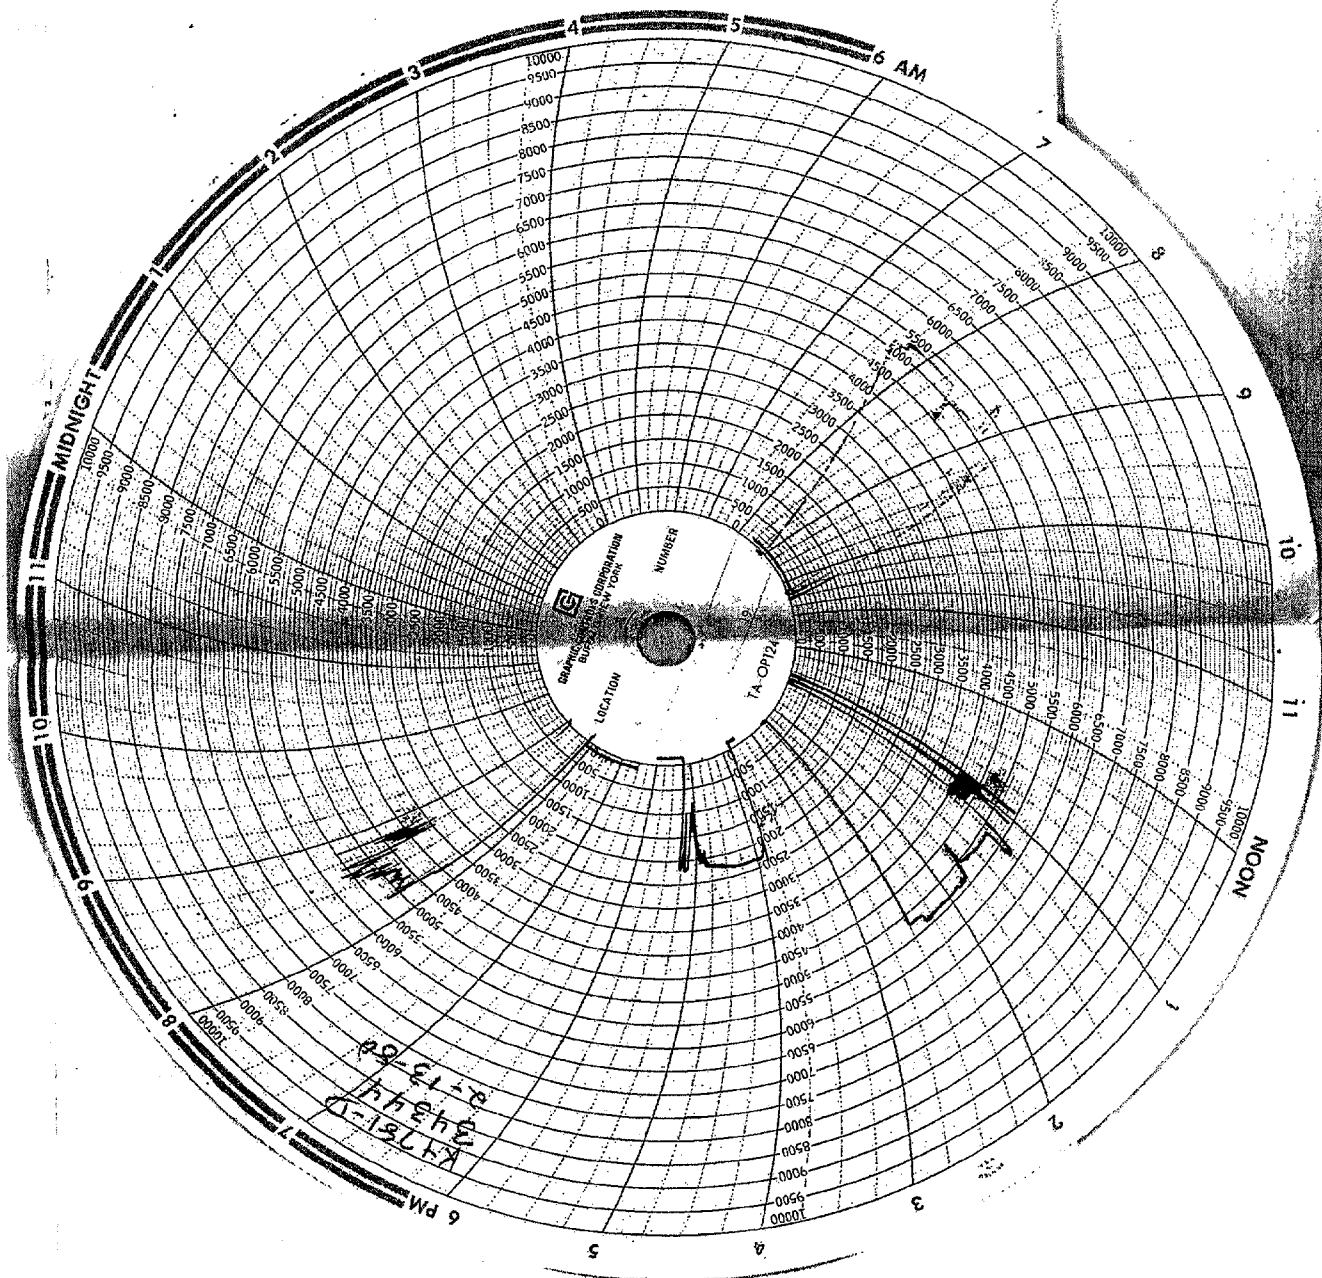

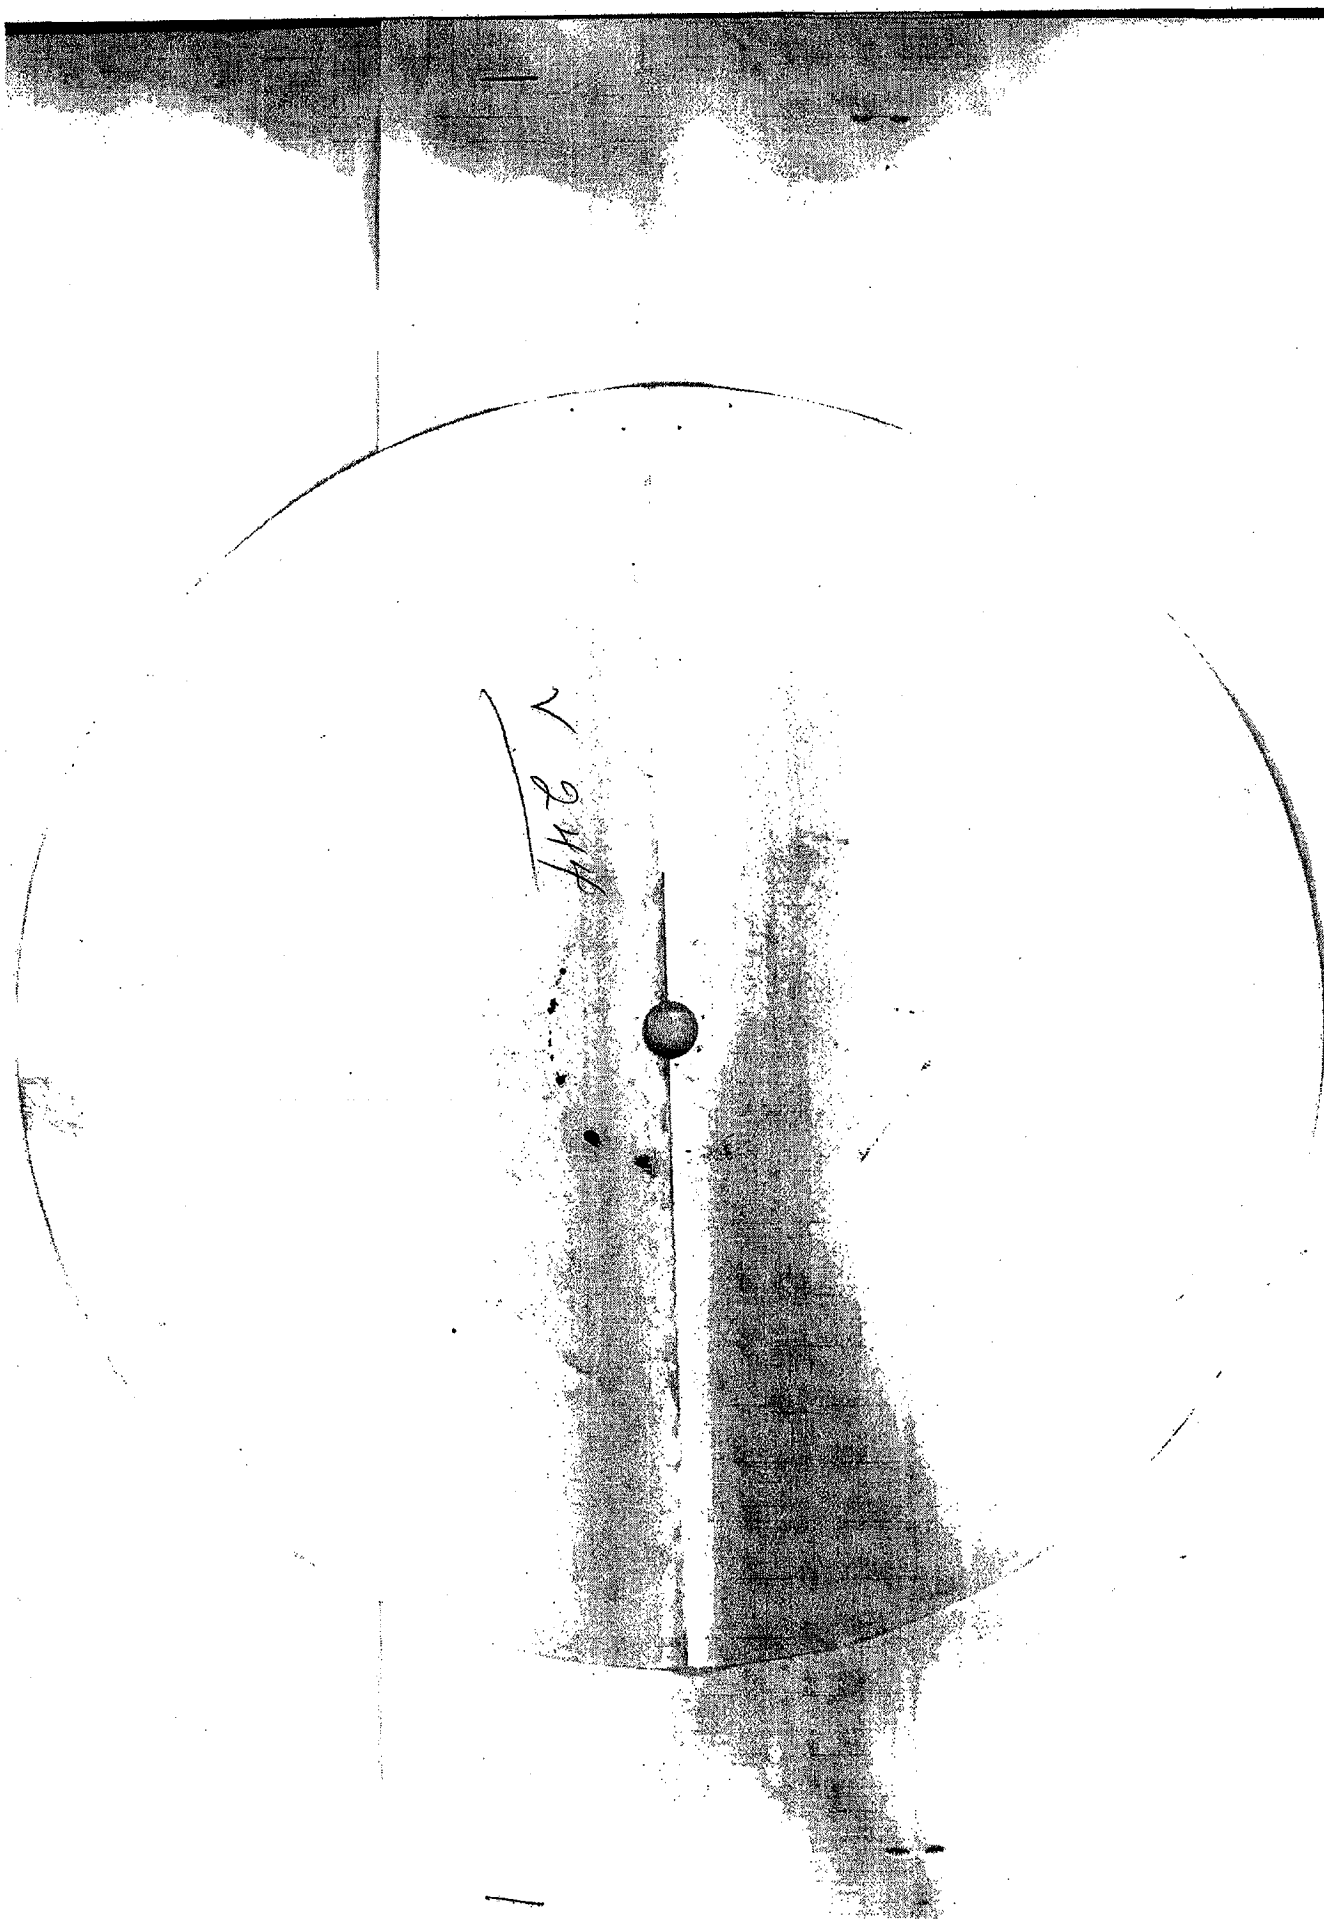

DUP050094666

