


ONE

GALLON

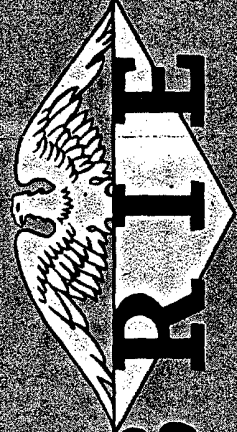

O'BRIEN'S

"75"

HOUSE PAINT

FOR ANY EXTERIOR SURFACE

PRIMING WHITE

MADE IN U.S.A. BY THE O'BRIEN CORPORATION, SOUTH BEND, INDIANA, BALTIMORE, MARYLAND

O'BRIEN'S "75" HOUSE PAINT

O'Brien's "75" House Paint represents the very finest in top quality exterior paint. Made with patented Pre-Shrunk Thermolyzed Oils, it looks better longer on any type of exterior surface — wood siding, wood shingles, aluminum siding, fences, wood trim, asbestos shingles, stucco, brick, concrete, metal. Extra plus features which make this quality paint a standout and favorite among painters and homeowners include — unbelievable hiding, greater coverage, easier brushing and more years service. Tested and proven on thousands of homes, "75" House Paint is America's best house paint value.

"75" HOUSE PAINT PRIMING WHITE

This is a specially formulated undercoat for use on exterior surfaces under "75" House Paint and other similar products. It controls the penetration of the oils in the paint applied over it, and dries dull permitting fast application of the finish coat. Easy to apply, its tremendous hiding provides a perfect base for final coat.

NOTE—In normal painting weather (70 F. or higher) Priming White should be allowed to dry 48 hours before being painted over. When applied at temperatures below 70 F. add two fluid ounces of O'Brien's No. 1188 Drier to each gallon. Below 50 F. add four ounces. Do not use this material on interior surfaces.

WARNING: May contain lead compound. Wash thoroughly after handling and before eating or smoking. Avoid breathing dust. Do not take internally.

REGISTERED
REC'D. No. 4513
DATE 8-3-57

DIRECTIONS FOR USE FOR NEW UNPAINTED SURFACES

1st Coat — O'Brien's "75" House Paint Priming White thinned with two or three pints of raw linseed oil.

2nd Coat — Mixture of one-half "75" House Paint Priming White and one-half "75" House Paint of the finish color.*

3rd Coat — O'Brien's "75" House Paint.

* This coat may be eliminated where time and cost necessitate a two-coat job.

FOR OLD PAINTED SURFACES

1st Coat — O'Brien's "75" House Paint Priming White. Tint to the approximate color of the finish coat.**

2nd Coat — O'Brien's "75" House Paint.

** For light colors tint Priming White with O'Brien's Oil Colors. For dark colors mix one-half Priming White and one-half "75" House Paint of the finish color.

RECOMMENDATIONS

g should never be done below the temperature below

Painted should be per-oil, dust and loose dirt.

Paint may be sprayed by

Paints good drying weath-erature is low, add two 188 Drier to each gallon.

Stir Paint Well Before and During Use. When Necessary — Thin with Turpentine or O'Brien's Reduct.

Inflammable — Keep Away From Fire

PRIMER		
Pigment	54.60%	
Titanium Dioxide	19.07%	
Calcium Pigment	41.04%	
Basic Silicate White Lead	17.05%	
(48% PbO type)	22.84%	
Magnesium Silicate	100.00%	
Vehicle	45.40%	
Refined Linseed Oil	29.10%	
Heat Treated Fish Oil	10.00%	
Mineral Spirits & Driers	32.46%	
	28.44%	
	100.00%	
*Veneish		
Non-Volatile: Soybean Oil, Thinned	53.44%	
Tung Oil Ester Gum	46.56%	
Volatiles: Mineral Spirits	100.00%	

THE O'BRIEN CORPORATION
SOUTH BEND, IND. BALTIMORE, MD.
OKLAHOMA CITY, OKLA.