10/60

R. W. HOGAN January 21, 1965

The stock of this bulletin is depleted. What is the future?

Per Al Heilman this bulletin is now obsolete, and will not be reprinted. — Also — this bulletin will NOT have a replacement — Per Al Heilman

9-14-65

Monsanto

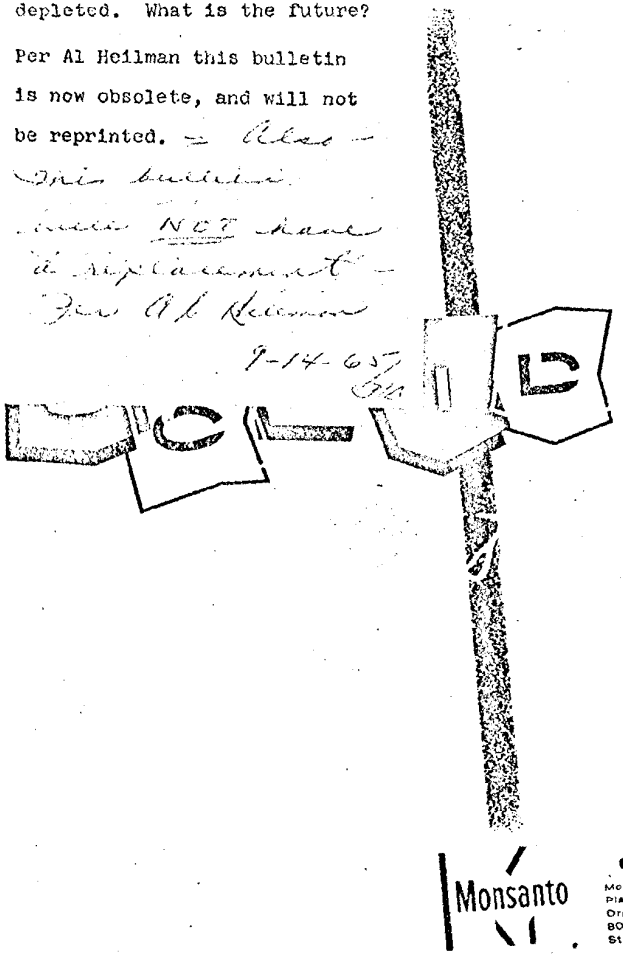

REVISED
OCTOBER, 1960

Monsanto Chemical Company
Plasticizer Sales Department
Organic Chemicals Division
800 North Lindbergh Boulevard
St. Louis 66, Missouri

0508834

TOWOLDMON0034391
WATER_PCB-00018860

TAKEN AS A CLASS

...solid plasticizers show more versatility than just about any other group. You find them in adhesives, lacquers, foams, rigid compositions and films... and in each type they perform unusual functions. Many times it is the solid plasticizer that allows a different product to be made, one that commands attention by its uniqueness.

This folder will acquaint you with the solid plasticizers available from Monsanto, and Monsanto can offer you the industry's largest selection. You'll find detailed information on each plasticizer in a Monsanto technical bulletin... *see page 7 for the list.* *If you'd prefer, a* Monsanto salesman will call and discuss your particular application. Investigate the new products or product improvements you can make by using solid plasticizers. Monsanto technical service will be glad to show you how solid plasticizers can work for you.

SOLID PLASTICIZERS GIVE YOU...

Hot processing

Hot processing is one area where solid plasticizers perform to good advantage. For instance, if you're mixing plasticizer and resin in a Banbury mixer, a solid plasticizer will melt at the processing temperature and function as a solvating liquid plasticizer for the resin. The lowered viscosity improves the formulation flow and results in much easier processing. Upon cooling, the plasticizer returns to its solid state which produces a stiff film or article.

Solvent use

In lacquers, certain solid plasticizers permit higher solid percentages. High-solid lacquers need fewer coats to build up a surface and therefore reduce application costs. As the lacquer dries, the presence of the solid plasticizer helps reduce blushing, sweating and separation.

0508835

TOWOLDMON0034392
WATER_PCB-00018861

SOLID PLASTICIZERS GIVE YOU...

For adhesives... *unusual properties*

Delayed-tack and heat-seal adhesives owe their existence to solid plasticizers, because it is the solid plasticizer that makes delayed-tack and heat sealing possible. Delayed-tack adhesives are activated by heat, and once activated, remain tacky long enough to permit handling before the adhesive cools and sets. The sharp melting point of solid plasticizers provides a sharp activation point for the adhesive. This activation temperature varies with different solid plasticizers, and special adhesives can be easily formulated to fit handling methods by selecting the proper solid plasticizer. Delayed-tack adhesives are covered by U. S. Pat. Nos. 2,462,029; 2,608,542; 2,608,543; 2,613,156 and 2,613,191.

For films... *no blocking*

Solid plasticizers can be used with other primary plasticizers to produce tough, clear films that feel dry and separate easily. Liquid plasticizers used alone often cause blocking due to a slight surface tackiness. Solid plasticizers also add resilience to films and impart exceptional resistance to extraction by kerosene, oils and greases.

For rigid products... *easier processing*

Processing of rigid vinyl products can be made easier by using solid plasticizers... without changing present equipment or methods. With heating, the solid melts and acts as a solvating liquid plasticizer for the resin. Upon cooling, the article becomes rigid because the plasticizing effect of the solid plasticizer is slight at room temperature. Used strictly as a processing aid, the solid plasticizer pays its own way by lowering processing costs.

For heat-seal coatings... *sharp activation temperature*

Like adhesives, heat-seal coatings require the sharp melting points of solid plasticizers to give them the heat-seal property. By themselves, liquid plasticizers cannot endow coatings with a sharp activation temperature. Instead, the coatings tend to block and be tacky at temperatures beneath the activation temperature. In this type of coating, solid plasticizers can be chosen to provide an exact temperature at which the heat-seal property is activated. And beneath that critical temperature, the coating does not block or have tackiness.

For rigid foams... *toughness*

In the chemically-blown foams, solid plasticizers can be used to add toughness to the finished foam.

In the plastisol foam process, solid plasticizers thicken the starting formulation to make possible more uniform cell formation as the gas is released. A uniform cellular structure makes the foam tough and provides uniform dimensional stability.

In chemically-blown vinyl foams made by milling or Banburying, the solid plasticizer acts as a liquid solvating plasticizer at the process temperature to make possible easy processing. At room temperature, the solid plasticizer's inefficiency results in a higher compression-resistant foam.

For impregnants... *better flow*

To get even dispersement of impregnating powders, solid plasticizers can be used as a flow aid for producing brake band linings. The flow aid property is also useful in certain types of adhesives, phenolic moldings and thermosetting ureas.

0508836

TOWOLDMON0034393
WATER_PCB-00018862

CHECK THIS LIST . . . . . .

of applications for Monsanto's solid plasticizers

Heat-sealing coatings
Dicyclohexyl phthalate (DCHP), Diphenyl phthalate, Santolite* MPH, Santicizer* 1-H, Santicizer 9

Rigid extrusions
Diphenyl phthalate, Aroclor* 5460, Triphenyl phosphate Santicizer 1-H, DCHP

Moldings and rigid foams
Triphenyl phosphate, Diphenyl phthalate, Aroclor 5460 and 1268, DCHP

Break-away "glass"
Santolite MHP

Phenolic brake linings
Santicizer 9

Surface coatings and composition wallboard

Cellulose acetate	Triphenyl phosphate
Nitrocellulose	DCHP, Diphenyl phthalate, Santolite MHP, Aroclor 5460
Melamine	Santicizer 9
Thermosetting resins	Santicizer 9, Santicizer 1-H, Triphenyl phosphate, Aroclor 5460 and 1268

Urea molding compounds
Santicizer 9

Fire-resistant cellulose acetate
Triphenyl phosphate

Crystallizing lacquers
Santicizer 1-H

Polyamides
Santicizer 9, Santicizer 1-H

Vinyl and other hot melts
Triphenyl phosphate, DCHP, Diphenyl phthalate, Aroclor 5460 and 1268, Montar* 4, 5, and 9

Delayed-tack adhesives
Diphenyl phthalate, Santicizer 1-H

Book-binding adhesives
Triphenyl phosphate, DCHP, Diphenyl phthalate, Aroclor 5460 and 1268, Santolite MHP, Santicizer 1-H

You can add to this list by developing your own special applications with solid plasticizers.

For special problems, take advantage of Monsanto's "Plasticizer Council" service. Research and technical service specialists are available to discuss and recommend ways to solve plasticizing problems.

Write: "Plasticizer Council"
Monsanto Chemical Company
Organic Chemicals Division
800 North Lindbergh Boulevard
St. Louis 66, Missouri

0508837

* Santolite, Santicizer, Aroclor, Montar, Monsanto Trademarks, Reg. U. S. Pat. Off.

TOWOLDMON0034394
WATER_PCB-00018863

of Monsanto solid plasticizers

DICYCLOHEXYL PHTHALATE (DCHP)	Appearance	White Solid
	Acidity (phthalic acid)	0.01 per cent maximum
	Melting point	63.0° C. minimum to start
	Assay (ester content)	99.0 per cent minimum
	Color of melt (APHA)	100 maximum
	Odor	Moderately aromatic, slightly phthalic characteristic
	Moisture (KF in methanol)	0.1 per cent maximum
DIPHENYL PHTHALATE	Appearance	Essentially white, fused solid with slight yellow or brown cast
	Color (diluted 20:50 ml with acetone), APHA	160 maximum
	Turbidity (diluted 20:50 ml with acetone)	Essentially clear
	Acidity (as phthalic acid)	0.10 per cent maximum
	Free phenol	0.20 per cent maximum
	Ash	0.05 per cent maximum
	Moisture	0.25 per cent maximum
TRIPHENYL PHOSPHATE	Appearance	White flakes
	Odor	Very faint aromatic, maximum
	Melting point	48.5° C. minimum to start
	Acidity (as phosphoric acid)	0.003 per cent, maximum
	Stability to potassium permanganate	65 per cent transmission, minimum
AROCLOR 5460	Appearance	Clear, yellow to amber brittle resin
	Color, NPA, Molten	2 maximum
	Softening Point (ASTM E28-51T), °C.	98 - 105.5
	Solubility (25 g in 25 g Acetone at 25° C.)	1 hour minimum
	Acid number, mg KOH/g	0.05 maximum
	Chlorine, per cent	58.5 - 60.6
AROCLOR 1268	Hold Point, °C.	135 - 160
	Acid Number, mg KOH/g	0.05

TOWOLDMON0034395
WATER_PCB-00018864

SPECIFICATIONS.... *(Continued)*

MONTAR 3
MONTAR 4

	MONTAR 3	MONTAR 4
Appearance	Black Solid	Black Solid
Softening Point, °C. (ASTM E28-51T)	120 - 170	140 - 200
Acidity	Slightly basic	Slightly basic
Chlorine, per cent	50 - 52	54 - 56
Calcium Oxide, per cent	5 - 10	5 - 10
Iron, per cent	0.3 - 0.6	0.5 - 1.0

MONTAR 5
MONTAR 6
MONTAR 9

	MONTAR 5	MONTAR 6	MONTAR 9
Appearance		Dark Brown or Black Solids	
Softening Point, °C. (ASTM E28-51T)	180 - 250	150 - 210	130 - 160
Acidity, mg KOH/g	Slightly basic	Slightly basic	0.1 - 0.3
Chlorine, per cent	53 - 55	59 - 61	—
Calcium Oxide, per cent	1 - 3	2 - 5	—
Iron, per cent	0.1 - 0.2	0.2 - 0.4	0.2 - 0.4
Flash Point, °F.	—	—	450 - 550
Fire Point, °F.	—	—	530 - 630

SANTICIZER 1-H

Appearance	Yellow-brown fused mass
Crystallizing point, °C. (in vacuum jacket)	82.5 minimum
Melt test:	
Color APHA	300 maximum
Clarity	Slightly turbid maximum
Moisture, per cent (KF in methanol)	0.15 maximum

SANTICIZER 9

Appearance	Fine, white to light-cream, granular particles
Color & Turbidity (33⅓ wt. % in acetone)	
Turbidity	APHA 40 maximum
Color	APHA 300 maximum
Screen Test	
Retained on 20 mesh	Trace, maximum
Retained on 40 mesh	3.0 per cent, maximum

SANTOLITE MHP "A" GRADE

Appearance	Hard, practically colorless resin
Color of solution (25 g in 75 g butyl acetate), APHA	50 maximum
Refractive index, 25° C. (25:75 butyl acetate)	1.4275 to 1.4325
Solubility (25:75 butyl acetate)	Complete

0508839

TOWOLDMON0034396
WATER_PCB-00018865

CHECK THIS RANGE OF MELTING AND SOFTENING POINTS . . . . . .

MELTING POINTS (°C)

48.5	Triphenyl Phosphate
62	Santolite MHP
63	Dicyclohexyl Phthalate
69	Diphenyl Phthalate
82.5[a]	Santicizer 1-H
185	Santicizer 9

a) Crystallization Point

SOFTENING POINTS (°C)

98 - 105.5	Aroclor 5460
120 - 170	Montar 3
130 - 160	Montar 9
135 - 160[b]	Aroclor 1268
140 - 200	Montar 4
150 - 210	Montar 6
180 - 250	Montar 5

b) hold point

TECHNICAL LITERATURE . . . . . .

...Is available on all of Monsanto's solid plasticizers. Send for your copies today.

BULLETINS

PL-1H	Santicizer 1-H
PL-9	Santicizer 9
PL-301	Triphenyl Phosphate
PL-306	Aroclor Plasticizers
PL-312	Dicyclohexyl Phthalate
PL-319	Diphenyl Phthalate
PL-320	Santolite MHP, MS-80%
0-139	Montar Compounds

The information contained in this bulletin is, to our best knowledge, true and accurate, but all recommendations or suggestions are made without guarantee, since the conditions of use are beyond our control. The Monsanto Chemical Company disclaims any liability incurred in connection with the use of these data or suggestions.

Furthermore, nothing contained herein shall be construed as a recommendation to use any product in conflict with existing patents covering any material or its use.

0508840

TOWOLDMON0034397
WATER_PCB-00018866

Gentlemen:

Please send me the indicated technical bulletins about your solid plasticizers:

- ☐ PL-1H Santicizer 1-H
- ☐ PL-9 Santicizer 9
- ☐ PL-301 Triphenyl Phosphate
- ☐ PL-306 Aroclor Plasticizers
- ☐ PL-312 Dicyclohexyl Phthalate
- ☐ PL-319 Diphenyl Phthalate
- ☐ PL-320 Santolite MHP, MS-80%
- ☐ O-139 Montar Compounds

NAME_____

TITLE_____

COMPANY_____

ADDRESS_____

CITY_____

ZONE_____ STATE_____

0508841

TOWOLDMON0034398
WATER_PCB-00018867

MONSANTO CHEMICAL COMPANY
ORGANIC CHEMICALS DIVISION
ST. LOUIS 24, MISSOURI

AKRON
ATLANTA
BOSTON
CHICAGO
CINCINNATI
CLEVELAND
DETROIT
HOUSTON
LOS ANGELES
MINNEAPOLIS
NEW YORK
PITTSBURGH
SAN FRANCISCO
SEATTLE
SYRACUSE
WILMINGTON

MONSANTO CHEMICALS LTD.
London

MONSANTO CHEMICALS
(AUSTRALIA) LTD. Melbourne

MONSANTO (CANADA) LTD.
Montreal • Toronto • Vancouver

0508842

TOWOLDMON0034399
WATER_PCB-00018868