


HOSE-AIR DUCT AND DEFROSTER-236




ORIGINAL EQUIPMENT TYPE USED BY LEADING CAR MANUFACTURERS

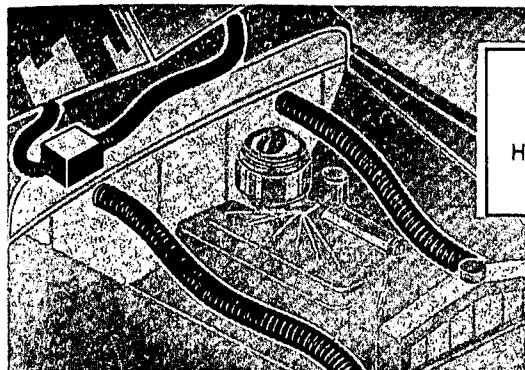

**FLEXIBLE - NON-COLLAPSIBLE
WILL NOT KINK**

Hose Constructed of Rubber Impregnated Fabric
with Spiral Wire Insertion

Diameter	Length	Part No.
1 1/4 in.	6 Ft.	3-7191
1 1/2 in.	6 Ft.	3-7200
1 3/4 in.	6 Ft.	3-7201
2 in.	6 Ft.	3-7202
2 1/4 in.	6 Ft.	3-7192
2 1/2 in.	6 Ft.	3-7203
2 3/4 in.	6 Ft.	3-7193
3 in.	6 Ft.	3-7204
3 1/4 in.	6 Ft.	3-7194
3 1/2 in.	6 Ft.	3-7195
3 3/4 in.	6 Ft.	3-7196
4 in.	6 Ft.	3-7205
4 1/2 in.	6 Ft.	3-7206
5 in.	6 Ft.	3-7207
5 1/8 in.	6 Ft.	3-7208
6 in.	6 Ft.	3-7197

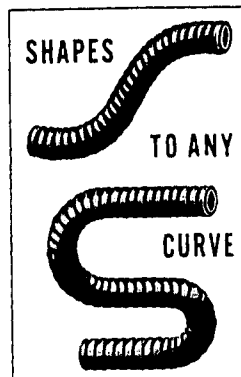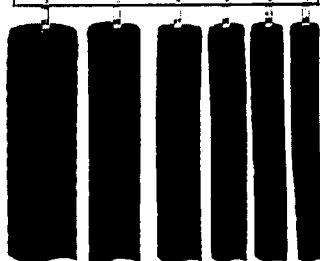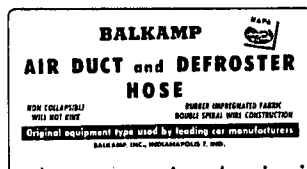


No. 29A

DISPLAY and MERCHANDISER
Contains 1 each of the following:

3-7200
3-7201
3-7202
3-7203
3-7204
3-7205

CHOKE HEATERS-244

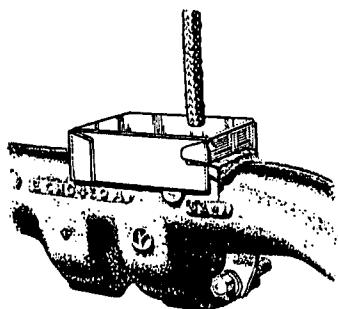

Quick and Easy
To Install

INSTALL A CHOKE HEATER

The exacting requirements of Ford products choke systems demand:
An even temperature at all times.
Regulated flow of heat.
Pure, dry air.

The best way to meet the demand is by installing a manifold mounted
choke stove.

**ELIMINATES STICKING
CHOKE AND PLUGGED
AIR PASSAGES**

Car & Years	Models	Manifold Casting	Part No.
FORD			
1959	All w/200 HP Engine	EDB9430A	3-5476
55-57	All (Ex. '55-'56 w/Dual Exhaust)	EDB9430A	3-5476
55-56	All w/Dual Exhaust	ECH9430A	3-5475