Hastings Air Conditioning Co., Inc.

Hastings, Nebr.

HASTINGS AIR CONDITIONING — The Fresh Air System


Manufacturers of

Cooling, Heating and Ventilating Equipment.
Water, DX and Steam Coils.
Gas and Steam Unit Heaters.
Gas Power Conversion Burners.


A complete line of air conditioners for chilled or well water, cold city water, and direct expansion. Full range of sizes, 1 to 40 tons.

All coils are constructed entirely of copper. Fins are both solder-bonded and mechanically-bonded to the tubes for permanent high efficiency.


Flowmeters (to visually indicate water flow) are standard on all water units.

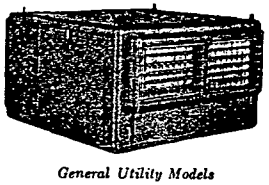


General Utility Models




Floor Models

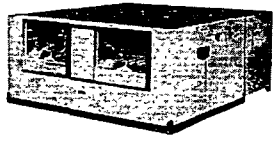


Central Plants



***DOUBLE-KOOL* "2-stage" COOLING UNITS**—3 to 56 tons. 2 Tons cooling per compressor hp. Air is first pre-cooled using water up to 70° F, then further cooled and de-humidified by "Freon" coil. Packaged and remote models.
Up to 100 percent FRESH AIR may be used for cooling, regardless of outside conditions.
Saves approximately 50 percent of water and power cost.



HOME AIR CONDITIONERS—2 to 5 tons
Easily attached to any furnace.
Water Coil Models—for water up to 60° F.
Double-Kool Models (*Combination Water-DX*)—for water up to 70° F.



GAS UNIT HEATERS—50,000 to 250,000 Btu capacity
Equipped with **CENTRIFUGAL** or **PROPELLER** type fans.

DUCT FURNACES available for use with remote blowers.

A.G.A. approved for all gases.

Aluminized steel heat exchangers for fast heat transfer and extra long life.
Stainless steel ribbon burners for quiet, efficient combustion.
Dual directional, adjustable louvers permit complete control of air delivery.



HEATWELL POWER GAS CONVERSION BURNERS—
Inshot—To replace oil burners. Up to 370,000 Btu.
Roundhead—For any round furnace or boiler. Up to 250,000 Btu.
Adjusto "V"—Commercial, Multiple-dwelling, and Industrial. Up to 4,000,000 Btu. No combustion chamber required. Adjustable flame placement.

Write for Catalogs, Literature, or Information


KENNARD Corporation

1819 So. Hanley Rd., St. Louis 17, Mo.


Manufacturers of

AIR CONDITIONING EQUIPMENT


Finned Coils (Heating & Cooling)—Air Conditioning Blower Units—Multi-Zone Units—Heating and Ventilating Units—Sprayed Coil Dehumidifiers—Cooling Towers—Evaporative Condensers—Liquid Chillers




AIR CONDITIONING BLOWER UNITS
14 Sizes. 300 to 21,600 cfm. Horizontal or Vertical. *Catalog No. AC.*



MULTI-ZONE UNITS
Sizes up to 36 sq ft. Cooling Coil Face Area. *Catalog No. MZ.*

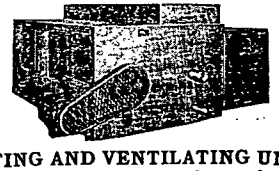

HEATING AND VENTILATING UNITS
Air Volumes 300 to 28,800 cfm, and up to 36 sq ft Coil Face Area. *Catalog No. HV.*

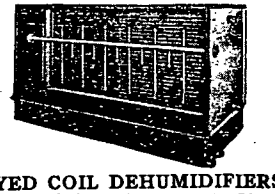


SPRAYED COIL DEHUMIDIFIERS
56 Sizes. Coil Face Areas up to 81 sq ft. *Catalog No. SC.*






COOLING TOWERS — — QT Model, 3 and 5 ton, with water turbine driven Propeller Fan. KT Model, 3 through 16 ton, Centrifugal Type Fan. CT Model, 15 through 75 ton (not shown). **EVAPORATIVE CONDENSERS** — — (not shown). EK Model, 3 through 15 ton. ERC Model, 15 through 75 ton.

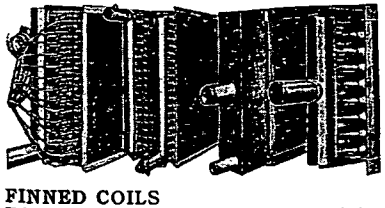

FINNED COILS
Direct Expansion, Water, Steam Distributing Tube, Standard Steam Coils. Sizes up to 48 in. wide x 132 in. long. *Catalogs No. CC and HC.*

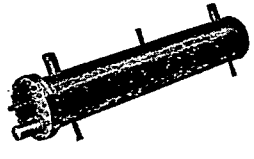

LIQUID CHILLERS
Direct Expansion, "Freon" Shell and Tube Liquid Chillers. Internally finned tubing, brass baffles, positive oil return, closed refrigerant circuits without "Freon" gaskets. *Catalog No. LC.*