Install the Nilfisk HEPA filter when exhaust air must be "white room" clean. Designed specifically for recovery of toxic and nuisance dusts. See technical specifications below.
Exhaust Filter 115650

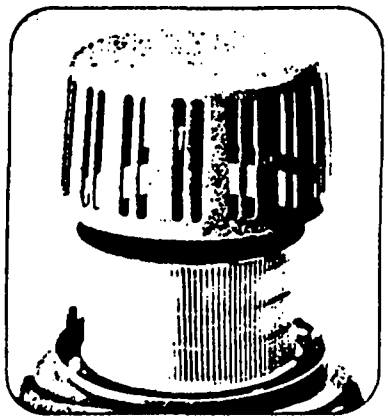

	Aluminum
	Glass fiber
	5½"
	3'
	496 sq. inches
	90°C (194°F)

	100 %
	99.999%
spherical aerosol, particle size <0.3 µm	99.99 %
e size 0.3-0.5 µm	99.97 %
l	99.97 %

NILFISK
Blowers



To use the exhaust air for blowing, simply replace the diffuser with a blower adapter. The hose fits this adapter. Blowing is used for areas impossible to reach with suction.

Blower Adapter 115620

NILFISK
Paper Bag System

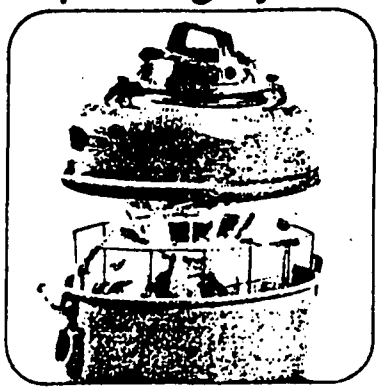

The GS-81 can be equipped with disposable paper bags for "dust-free" disposal of collected debris. Container capacity of 5¼ gallons dry bulk is reduced to 4 gallons when paper bags are installed.

NILFISK
ELECTRO powered brushes

The motor-driven brushes of the power nozzle groom the surfaces of carpets of all depths. Lint and hair are scooped up and sucked into the container. Pile is left looking freshly groomed all over again.

Model ETG-1N
(1½ inch)

Cleaning width
12 inches

Available
220 volts only

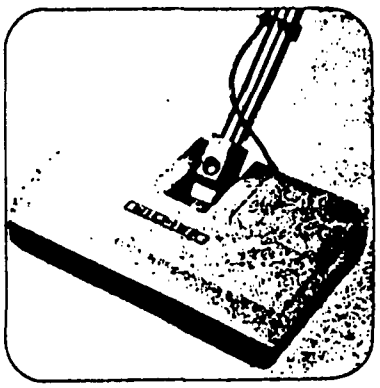

NILFISK
Hoses and Wands

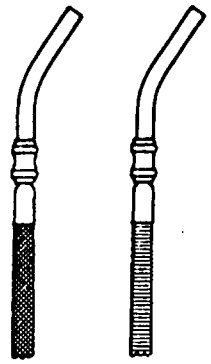

Hoses



Hose Protection Rings 809583

Hoses are available in both braided and neoprene configurations. Both are fitted with a special container connector, a flexible wand coupler, and a curved steel wand. Each hose can be protected from wear with rubber protecting rings.

6½ ft. neoprene hose	115736
6½ ft. braided hose	115734
10 ft. neoprene hose	115737
10 ft. braided hose	115735

Hose extensions available.

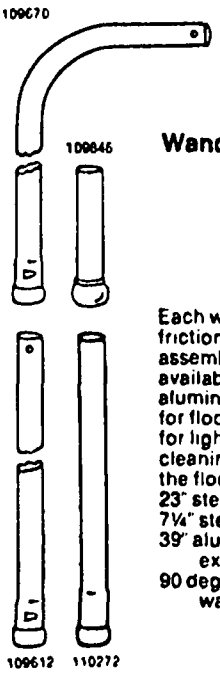

Wands

Each wand is fitted with a friction ring for easy assembly. Two types are available: steel and painted aluminum. Steel wands are for floor cleaning; aluminum for lightweight overhead cleaning up to 20 feet from the floor.

23" steel wand	110272
7¼" steel wand	109846
39" aluminum extension	109612
90 degree angle wand	109670

8005 1646

PRODUCED BY FORD