



Eugene W. O'Brien
Managing Director

Francis C. Smith, Editor

Hunter R. Hughes, Jr.
Associate Editor

Richard L. Priess
Southwestern Editor

W. E. Coogler
Production Manager

Business Representatives

E. L. Rogers, 18 East 48th St.,
Room 1904, New York 17,
N. Y.—Phone, Plaza 8-2565.

William K. Hoffman, 28 Bowdoin
St., Maplewood, N. J.—Phone
So. Orange 2-2484.

Maynard L. Durham, 87 Covington
Road, Buffalo 16, N. Y.—
Phone, Amherst 6332.

A. E. C. Smith, 206 Auditorium
Building, Cleveland 14, Ohio
—Phone, Cherry 7352.

P. O. E. Johnson, 168 North
Michigan Ave., Chicago 1,
Ill.—Phone, Central 4131.

L. B. Chappell, Auditorium Bldg.,
427 West 5th St., Los Angeles,
Calif. — Phone, Tucker
6363.

Richard L. Priess, 1341 Liberty
Bank Bldg., Dallas, Texas.—
Phone, Central 7673.

Annual Subscription—\$1.00
Canada—\$1.50; Foreign \$2.00

Published Monthly by

W. R. C. SMITH
PUBLISHING CO.

Publishers also of: *Cotton, Electrical South, Southern Hardware, Southern Automotive Journal, Southern Building Supplies.*

W. J. Rooke, President; R. P. Smith, Executive Vice-President; T. W. McAllister, Vice-President; E. W. O'Brien, Vice-President; A. E. C. Smith, Vice-President; J. C. Cook, Vice-President; O. A. Sharpless, Treasurer; A. F. Roberts, Secretary.

Editorial and Executive Offices

GRANT BUILDING
ATLANTA, GEORGIA

SOUTHERN POWER AND INDUSTRY

CONTENTS

Mechanical Handling of Cross-Ties, by A. M. Deiters	40
A Good Lunch Helps, by Francis C. Smith	46
Profits in Plant Layout, by Gregory M. Dexter	49
Progress in Candy Making, by R. A. Brock and F. W. Hayward	58
Hygienic Importance of Dust, by N. V. Hendricks	61
Centrifugal Boiler Feed Pumps, by Igor J. Karassik	65
Labor Turnover, by Philip Panfield	74
Damage by Fly Ash Erosion, by Harry M. Spring	78
Electric Circuit Troubles, by Thomas Trail	84
A History of Power, by Carl J. Eckhardt, Jr.	86

PRACTICAL DISCUSSION


Bouting Operation Improved	92	Tight Bolt-Threads	94
Magnetic Street Cleaner	92	Ladder Aids Maintenance	94
Simple Air Manifold	92	Freezing Aids Repairs	94
Reading Meters and Gauges		94	

DEPARTMENTS


FACTS AND TRENDS	5	INDUSTRY SPEAKS	39
BUYERS' INFORMATION	8	NEWS OF THE MONTH	96
TIMELY COMMENTS	37	NEW EQUIPMENT	114

INDEX TO ADVERTISERS.....134


Copyright, 1946, by W. R. C. Smith Publishing Company

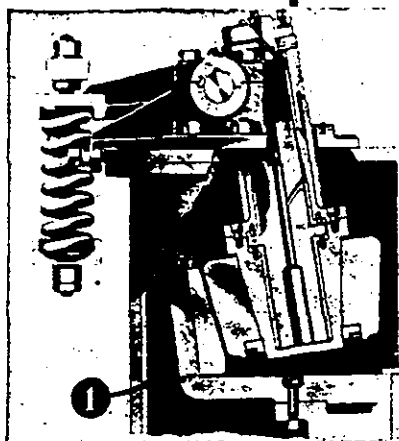

At left — Cutaway view showing section of bowl, grinding ring and roller journal.

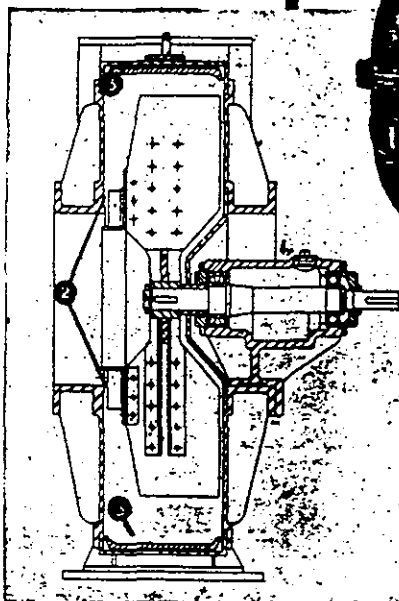

At left — Section through mill exhauster showing new shrouded fan wheel with "whizzer" blades.

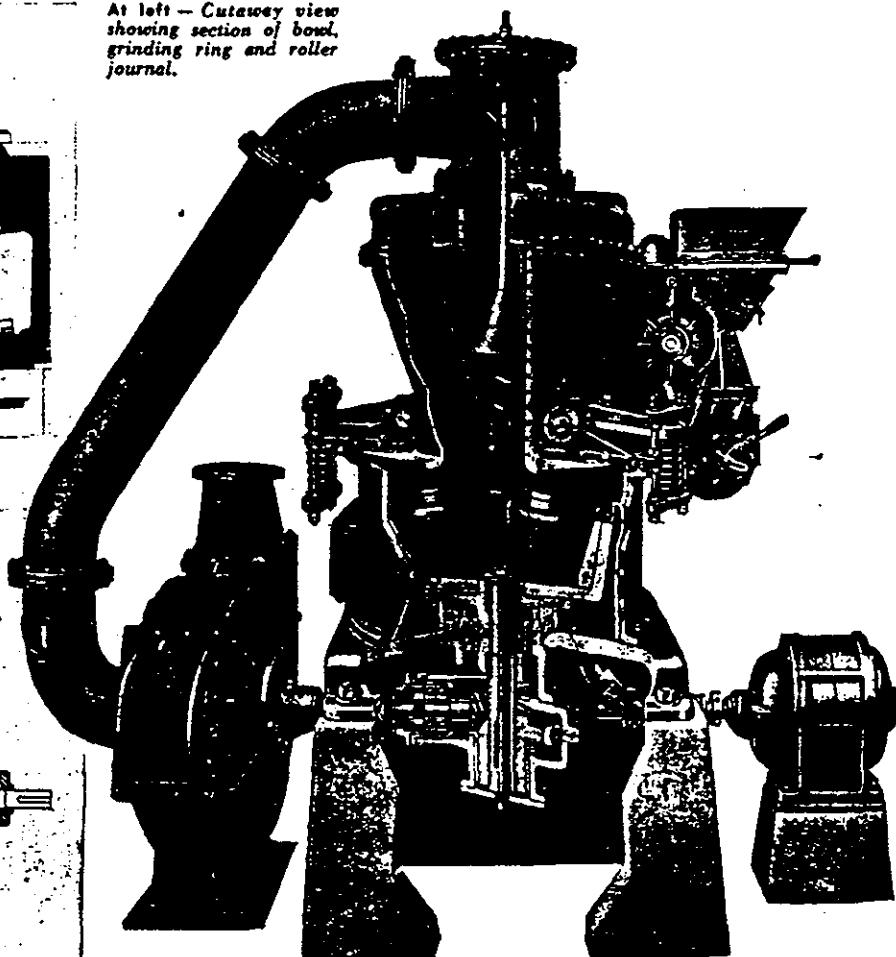

COMBUSTION

G-E PRODUCTS INCLUDE ALL TYPES OF BOILERS, FURNACES, POLYMERIZED FUEL SYSTEMS AND STOKERS; ALSO SUPERHEATERS, ECONOMIZERS AND AIR HEATERS

now better than ever

In 1935 the C-E Raymond Bowl Mill came into the steam-power field with design and operating advantages that revolutionized previous concepts of coal pulverization. It had a wide capacity range. It handled wet coal with great facility. It was rugged, accessible and easily maintained. The mill ran quietly and power consumption was low. In

consequence, the Bowl Mill won immediate and widespread acceptance among plant engineers — more than a million lb pr hr of grinding capacity was ordered within five years.

Today, the Bowl Mill with all of its initial advantages, offers several new improvements, among which the following are of major importance:

- ① Flat-Bottom Bowl — increases the response of the mill to load changes by eliminating any inactive area where coal can remain in the mill; also avoids any tendency of heavy, abrasive material such as pyrites, to accumulate in the bottom of the bowl.
- ② The Whizzer Wheel — a new exhaustor wheel design which greatly increases the life of exhaustor blades. A shrouded wheel carries heavily constructed "whizzer" blades which bypass a portion of the air-coal mixture directly to the exhaustor outlet. In service this has doubled the life of exhaustor blades — in some cases more than doubled it.
- ③ New, Wear-Resisting Materials — are now being used for exhaustor liners and deflectors, resulting in greatly increased life of these parts.
- ④ Center Feed — where conditions permit, larger Bowl Mills can now be arranged for center feed which assures a freer flow of coal to the mill and serves to equalize wear on grinding parts.

Thus 1946 finds the C-E Raymond Bowl Mill, after more than 10 years at the top of its field, still adding refinements in design and materials that make it better than ever before.


40% of all Bowl Mills purchased to date are Repeat orders



n E N G I N E E R I N G


200 MADISON AVENUE, NEW YORK 16, N. Y.

SOUTHERN POWER & INDUSTRY for NOVEMBER, 1946

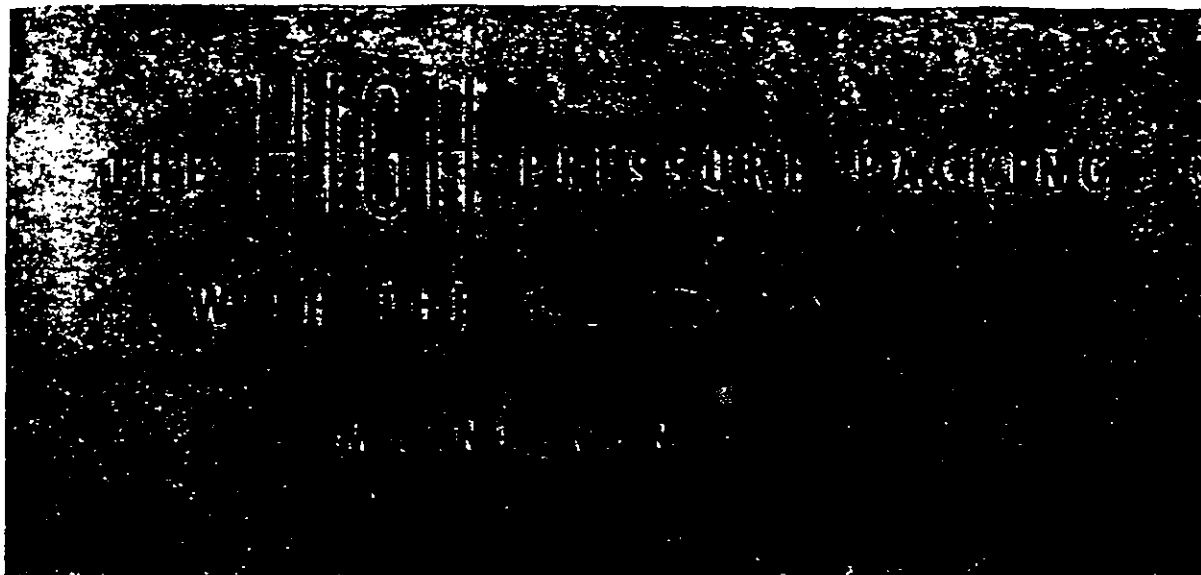


GARLOCK 150

Low in maintenance cost because it gives such *long, dependable* service. Costly shut-downs for frequent repacking are avoided. Man hours and machine hours are saved. Use GARLOCK 150 on piston rods of engines, pumps, compressors, etc., against steam pressures up to 800 lbs.



GARLOCK 150 Spiral packing, illustrated.
Coil—GARLOCK 125
Rings—GARLOCK 200

The Garlock Packing Company, Palmyra, New York
In Canada: The Garlock Packing Company of Canada Ltd., Montreal, Que.

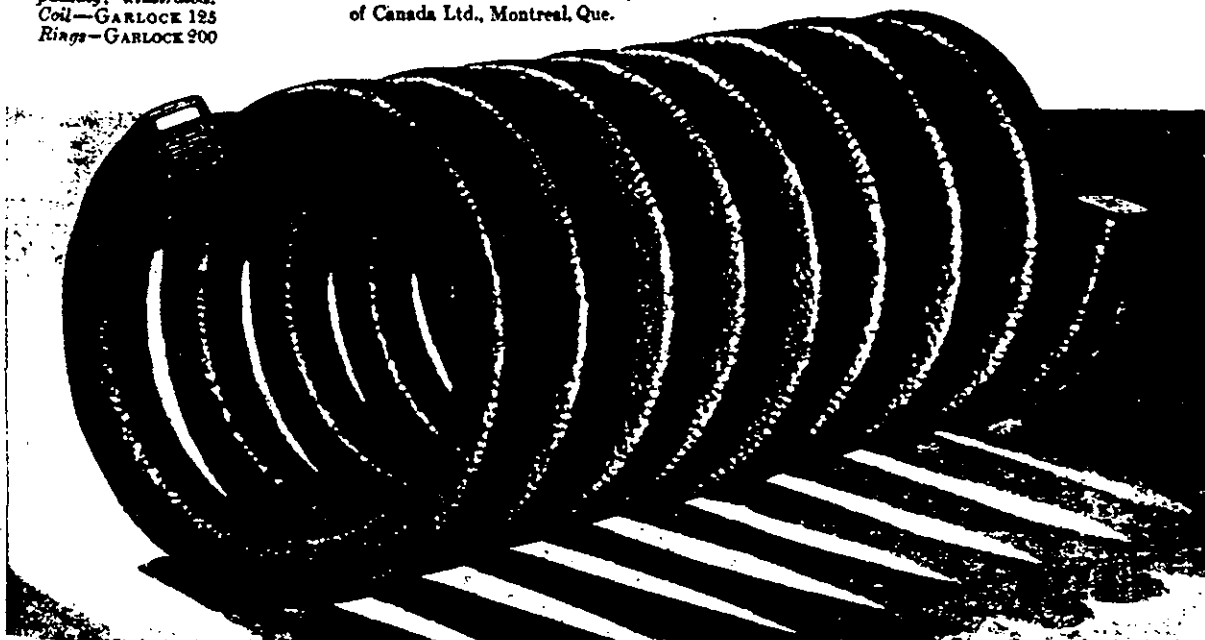

ad me
rule
y ma
y on
for
aw
col
nd te
make
ostly
ected
l of
aw m
ity
is litt
artisa
practic
r mak
iftsma
t to
e inte
develo
by the
hen th
als can
(0)

Industrial Hygiene Importance of Dust

By N. V. Hendricks

Chief Engineer Industrial Hygiene
Service, Georgia Department
of Public Health

*Nearly all types of modern
industry are concerned
with dust and its control.*



Courtesy M. E. A. Co.

FIG. 1. THE MIDGET IMPINGER USED FOR COLLECTING ATMOSPHERIC DUST SAMPLES.

THE annual cost to industry from uncontrolled dust amounts to a staggering figure. In many cases the problem of dust is dismissed by management as only a nuisance. In other plants, the recovery of certain dusts is economically sound, especially where the particulate matter may contain precious metals or may carry valuable processing stock. Aside from any nuisance or economic loss resulting from the escape of dust there are certain dust exposures which may result in acute health hazards. This is especially true of dusts containing a high percentage of free silica, asbestos, or other toxic materials. Where health considerations are involved in such exposures, legal aspects present themselves. In most states where occupational diseases are compensable, specific coverage is given to those disabilities resulting from the inhalation of silica dust.

Definitions

Many times true dusts are confused with fumes, smokes, mists, and fogs. In order to differen-

tiate between the origin of these materials, a definition of them is in order.

DUSTS are formed by the reduction of earthy materials and are usually produced by such operations as crushing, grinding, buffing, etc. The particle size of dusts may vary considerably, ranging from sub-microscopic to visible.

FUMES are formed by condensation and sublimation. Chemically, they are metallic and are usually the oxides of such metals as zinc, and lead. The particle size is usually below one micron.

Smoke comes from the burning of organic material and its particle size is usually less than one-half micron.

Mists and Fogs result from the condensation of water vapor on suitable nuclei, and the particle size will vary with given conditions.

General Properties

As a substance is reduced in particle size, there are certain general properties of the material which are changed. On breaking up a solid into finely divided particles, the surface area is greatly enlarged and therefore the space

occupied is greatly increased. As an example, a piece of quartz one centimeter on each side when crushed to where the particles of one micron in size will present a system containing 10^{10} number of particles. The total surface area will be 6 square meters. If these dust particles are dispersed onto the atmosphere in such manner that the concentration will be 100 million particles per cubic foot, the space occupied by this dispersed system will be 10 thousand cubic feet.

The chemical activity of a solid is considerably increased by a reduction in particle size. Thus the rate of oxidation is increased as is evidenced by occasional disastrous dust explosions. The phenomena of adsorption becomes more important as gases are more easily adsorbed on the surface of the smaller particle.

From the standpoint of health hazards resulting from dust exposures, the physiological properties of dust vary somewhat with the particle size. It is an accepted fact that with exposures to silica dust, the smaller the particle size, the greater the hazard.

Physiological Response

Drinker has summarized the reactions resulting from the inhala-

tion of dust by classifying the response into four groups. These are:

(a) **Pneumoconiosis**—The dusts producing this type reaction are harmful only when inhaled. The principal materials producing this type reaction are free silica and asbestos dust. On inhalation, these two materials produce specific lung pathology and from the standpoint of disability, present the most important of the dust exposures.

(b) **Toxic Reaction**—(As poisoning by lead, cadmium or radium) These materials produce harmful effects when taken into the body both by inhalation and ingestion. With reference to lead and its compounds which may be present in the atmosphere as particulate matter, it has been fairly well established that entrance into the

body by inhalation is more important mode of entry than the same material taken by mouth. This is primarily due to the fact that when such materials are taken into the body by inhalation, the major portion is taken into the blood stream, whereas, a considerable part of that taken by mouth is removed by certain organs of the body.

(c) **Metal Fume Fevers**—These conditions result from the inhalation of finely divided fume particles. The importance of metal fume fever has been brought to the attention of industry by the great amount of welding which has been an important industrial tool for the past few years. Where burning or welding is done on surfaces which have been galvanized, the problem of metal fumes becomes immediately important.

This is also a problem in foundries where the pouring of brass is done.

(d) **Allergy**—This type reaction is in general produced by pollen and certain organic dusts.

Common Industrial Dusts

Carbonates are usually combined with either calcium or magnesium. They normally occur in nature as calcite and magnesite or as dolomite, which contains both magnesium and calcium as the carbonate. Limestone and marble contain considerable amounts of these carbonates, as do the materials from which cement is made.

Due to the solubility in body fluids, these materials are removed when taken into the body by inhalation. The presence of carbon dioxide in such fluids is an important factor influencing their solubility. The same thing applies to the presence of carbon dioxide in water which comes into contact with these materials. In the presence of carbon dioxide the carbonate is converted to the more soluble bicarbonate, thus adding to the ease with which it is removed by solution.

Experimental and practical observations on carbonate dust indicate that these materials are not harmful when taken into the body by inhalation. This is probably due to the fact that they are easily removed due to their solubility.

Sulfates are common industrial materials and this general class may be illustrated by gypsum, which is calcium sulfate. This is a common material and is widely used in many industrial operations. It is generally considered that this type material is non-toxic and does not present any particular problem from a health standpoint.

Oxides vary considerably in their physiological reaction. In general the nature of the reaction will be dependent on the type metal from which the oxide is derived. Where such metals are specifically toxic, as would be the case with arsenic or lead, a specific toxic reaction could be expected from the inhalation of the oxide. However, other oxides appear to be relatively harmless, particularly where the metal is of a non-specific type. This is true of iron oxide. The mining of iron results in the exposure of a great number of men to the oxides of

FIG. 2. THE ELECTROSTATIC PRECIPITATOR AS USED FOR COLLECTING ATMOSPHERIC SAMPLES OF DUST AND FUMES. INSERT SHOWS RATE OF SETTLING OF DUST.

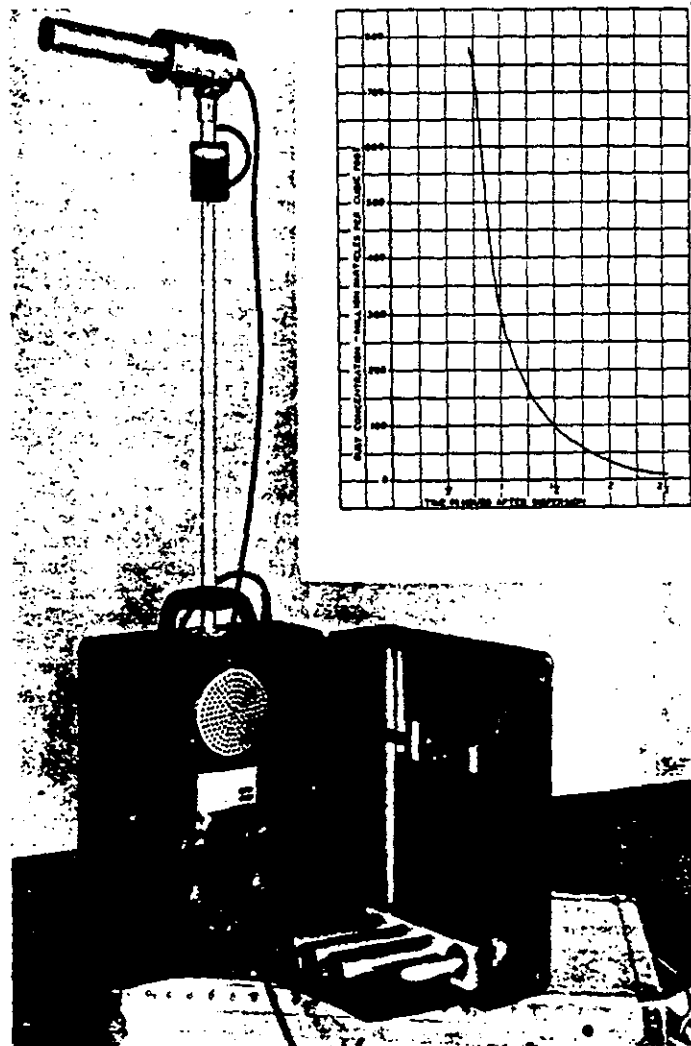




FIG. 3. GEORGIA KAOLIN DUST MAGNIFICATION 130X.



FIG. 4. QUARTZ DUST (SiO₂) MAGNIFICATION 130X.



FIG. 5. CALCIUM CARBONATE DUST MAGNIFICATION 130X.

this metal. However, it appears that exposure to the dust of iron does not produce pathology unless such exposure is accompanied by the pressure of free silica.

The mining of coal results in exposure to coal dust which contains a high percentage of carbon. Detailed studies of exposure to coal dust have been made by the U. S. Public Health Service and other agencies. It has been found that, in general, coal dust is retained in the lungs only when such dust contains a high percentage of free silica. Although coal dust may be deposited in the lungs of exposed individuals, the condition resulting is usually not considered disabling unless silica is present.

Silicates make up an important class of industrial materials and are used principally in the production of ceramics and similar materials. Talc, kaolin, mica, clays, etc., are chemically silicates and their widespread industrial application results in a great number of employees being exposed to this type dust. With the exception of asbestos, which is a silicate, this general class of materials does not appear to produce a disabling condition, except in isolated cases, when taken into the body by inhalation.

Asbestos is the only silicate known at the present time which produces a lung pathology comparable with that resulting from exposure to silica dust.

Of all the dust found in industry, probably the most important is free silica or silicon dioxide. It occurs in the form of quartz, flint, sandstone, and chert; and is as-

sociated with many other minerals and ores. The disabling condition resulting from the inhalation of free silica is known as silicosis and has long been a problem with industries such as stone cutting, granite, foundry, abrasive, and the like, where silica is used in processing. There are relatively few industrial operations which might result in direct exposure to pure silica dust. The importance of silica lies in its association with other materials. As an example, in foundry operations the dust generally will contain clay and materials of a non-silicious character, so that the actual percentage of free silica may be relatively low. This is also true in exposures to coal, iron oxide, and the mining of ores. When hard rock or silica is present, these dusts become important mainly due to the presence of silica rather than to the inherent properties of the parent material.

Factors Influencing Hazards

In evaluating the exposure to a dust there are several factors which should be taken into consideration. The duration of exposure is important, as it will indicate in a general way the total amount of dust which might be expected to have entered the body. Obviously other factors enter into such an evaluation of total dustiness, and these will be discussed later. History of past exposure is important. This is particularly true where an individual is exposed to silica dust. This point is of extreme importance to industry due to the fact that a worker may have contracted silicosis under a

previous employment. Where such a condition exists, the desirability of preemployment examination is obvious.

The concentration of dust breathed is important as this, within certain limits, will determine the possibility of development of dust diseases. Considerable research and practical observations have been made in the field of dust exposures to correlate clinical findings with atmospheric concentrations. For free silica, asbestos, and some of the other materials, fairly definite standards have been established. The nature of dust is important primarily from the standpoint of free silica content. This is particularly true of mixed dusts which constitute the majority of industrial exposures. The volume of air breathed enters into the picture as it directly influences the amount of dust which will be taken into the body. The rate of respiration or amount of air breathed in general will be determined by the physical effort required on the particular job. Where heavy work is being done, naturally an individual will require more ventilation than where less physical effort is involved.

Dust Measurements

In addition to the factors influencing dust hazards, it is necessary to make direct dust measurements in order to obtain a true evaluation of any dust exposure. Such measurements are made by the actual collection of dust samples, the counting of the dust particles, and by the identification of the materials making up the dis-

persed system. For the collection of dust samples, several instruments may be employed.

Much of the early work done on the control of silicosis in the mining areas of South Africa was carried out with the Konimeter. This instrument has been used some in this country, however, it has not met with the popularity which is enjoyed by certain other methods. From the standpoint of collecting efficiency, the electrostatic precipitator is probably the choice instrument, however, most of the work done on correlating atmospheric dust concentrations with medical findings has been based on samples collected and counted by the Greenburg-Smith technique. The collecting device employed is an impinger unit which samples at the rate of one cubic foot per minute.

Counting by this technique is done under light field. The percentage of free silica in a dust sample is usually determined by either chemical or petrographic methods.

Permissible concentrations of dust have been established for free silica, asbestos, and other materials. For both silica and asbestos, 5 million particles per cubic foot is considered as maximum working concentration. The U. S. Public Health Service has suggested a procedure by which the total dust concentration in millions of particles per cubic foot is multiplied by a percentage of free silica. If the resulting figure is more than 5 million particles per cubic foot, the condition is considered unsafe. If less than 5 million, the condition is considered safe. There should be considered certain limits of dustiness for any type of dust,

whether it be merely a nuisance value or health consideration. To most industrial hygienists, 50 million particles per cubic foot is the maximum atmospheric concentration of dust under which an employee should work. It should be pointed out that the only way of determining both the nature of the dust and the actual concentration is by direct sampling and similar procedures for the counting of dust.

Case History

MANY industries having problems of dust control recognize the existence of such problems to varied degrees. Some take passive attitudes, while others apply sound engineering procedures which result in a real job of dust control. Such modern engineering methods are used by the LeTourneau Company of Toccoa, Georgia.

This particular plant manufactures heavy road grading equipment and its major dust problem lies in operation of a foundry for the protection of basic steel parts. It is interesting to note that this Company considers the control of dust as a part of the general overall production schedule and as a result has its control methods integrated into general plant operations.

Although there are several methods which can be used for control of dust, ventilation, both in the form of general and local exhaust, probably offers the most satisfactory method and it is this approach which has been used by the LeTourneau Company. For general ventilation in the foundry,

two 15-foot fans are installed which handle 500 thousand cubic feet per minute each. Actually, the material removed by these fans is made up principally of smoke rather than true dust.

Two electric arc furnaces are operated and these are equipped with roof fans located immediately above the units. These fans handle 60 thousand cubic feet per minute each. Again, the major portion of the material coming from the arc furnaces is smoke rather than true dust, and comes from the alloy and flux material charged into the furnaces.

A problem of dust control in any foundry is the shakeout operation. This is particularly true where shakeout is mechanical and handled on a vibrating screen or grate. Here, a line conveyor system is used to bring the castings directly to the shakeout grate. A canopy type hood is installed immediately over the grate itself. In addition to canopy, side enclosures are provided which prevent air leakage. The fan serving this hood delivers 35 thousand cubic feet per minute, which results in a high capturing velocity at the entrance and discharge ports. An excellent job of dust control results on this particular operation.

Sand conditioning in many foundries is a dusty job. With the LeTourneau Company this is handled by means of local exhaust ventilation and three bag type filters handling 6 thousand cubic feet per minute each. Tumbling operations for cast cleaning are also provided with local exhaust ventilation.


(Continued on page 80)

FIG. 6. LOCAL EXHAUST ON TUMBLERS FOR CAST CLEANING.



FIG. 7. BAG HOUSE AND SAND BLAST UNIT FOR CAST CLEANING.

Courtesy LeTourneau Co.

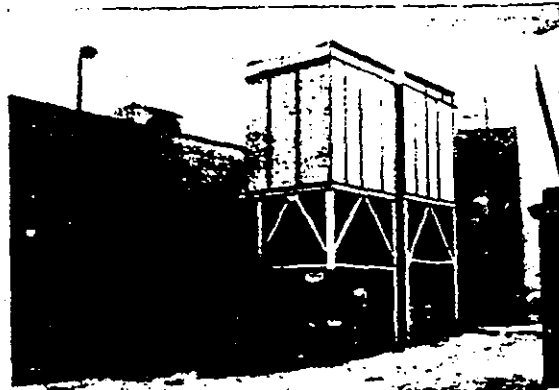

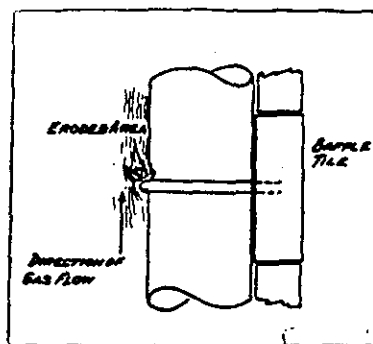


FIG. 2

at least 75%. Figure 2 shows the condition of the tube that failed.

Other tubes were found eroded adjacent to U bolts holding baffle tiles. The U bolts provided sufficient interruption in gas flow to cause eddy currents and localized impingement. (Fig. 3.)

Erosion by particles of fly ash

and unburned fuel has also been found in stoker-fired boilers.

At the time of each shutdown for cleaning and preventive maintenance (at least once every four months), all areas vulnerable to erosive attack should be examined. Areas most susceptible are:

1. Where flow of gases makes a turn, throwing out particles of solids.
2. Behind any cracks, breaks, or gaps in a gas baffle.
3. Adjacent to any projection that might divert normal flow of gases.

Should the boiler be provided with an induced draft fan, observe the condition of the blading. Abnormal wear may be indicative of erosive attack in the boiler.

Careful attention by all engineers to the problem of erosion may well prevent a serious accident.

in the plant.

The modernization program of the Brock Candy Company is taking place at a time when almost any product, regardless of quality or cost, can be sold. The real bottlenecks today are shortages of raw materials and skilled personnel. However, progressive businessmen know that these conditions are only temporary and that within a few years, companies which cannot guarantee quality will not be able to sell their products. The Brock Candy Company will continue to be a leader in its field because it has refused to sacrifice quality of its products in these days when consumer demands are greater than the supply of raw materials and because it has already inaugurated a program of control and research which will result in constant improvements.

Candy Making

(Continued from page 60)

not be taken for granted, a chemical laboratory is essential.

The Brock Candy Company is now in the process of constructing a modern chemical laboratory and training a technician to perform control analyses. The laboratory, which is located in a large air conditioned room near the candy cooking operations, is equipped with modern stone-topped laboratory benches, the latest chemical glassware, and such special analytical instruments as balances, vacuum oven, refractometer, and pH meter. Provision has been made for such analyses as moisture, invert sugar, viscosity, pH, melting point, and refractive index. Many of the control tests have been developed specifically for the Brock Candy Company, and new procedures will be added from time to time as the need arises.

The Industrial Research Institute of the University of Chattanooga has cooperated with the Brock Candy Company in selecting the equipment, outlining and developing analytical procedures, and training a technician to operate the control laboratory. A research

project on improvement of the quality of candy has been sponsored by the Brock Candy Company at the Industrial Research Institute of the University of Chattanooga.

Since all raw materials will be analyzed and tested in the company laboratory, variation in properties will be detected before the material is used. This procedure will assure products of uniform quality, since inferior raw materials will be discarded and formulations will be based on the actual analysis of high grade raw materials rather than on standard procedure which do not make allowance for variation in the ingredients. Analysis and testing will assure high quality of finished products and permit any difference in quality to be detected. In this way, any unavoidable errors in manufacture can be corrected and adequate controls instituted to prevent their recurrence.

The facilities of the control laboratory will also be available for the evaluation of research and development work being carried out in the factory. In addition to maintaining the production of uniform high quality products, the personnel and equipment of the control laboratory will be available for many other technical assignments

Dust

(Continued from page 64)

tion and dust arrestors as is shown in the photograph. Note that exhaust is applied through the trunnion of the tumbler.

In foundry operations or any other industrial type processing, housekeeping is an important factor influencing the generation of dust. This foundry employs two five horsepower vacuum cleaners for floor maintenance. By this procedure loose dust, sand, and the like, is removed from the floor and is not projected into the atmosphere by the movement of machinery, scuffing of feet, and the like. This is one impressive point in the operation of this particular foundry. Excellent housekeeping is combined with a good procedure for materials handled.

In all of the attempts at dust control at the LeTourneau Company, employee cooperation is obtained. Employee cooperation comes through planned program of employee education and employee participation in affairs involving the health of the worker.

Periodic dust samples collected in the LeTourneau foundry indicate atmospheric concentrations on various operations well below what is considered as maximum safe working limits.



RATED IN

ned into
ough it
mmodate
er feed
heat ex-
circula-
perature
e pump
n cycle,
l heater
mp and
there-
a tem-
or than
by-pass,
heat ex-
conden-
rom the
if this
to a di-


of the
it must
by-pass
the dis-
a pres-
to the
a tem-
s this
e pres-
emper-
be ex-

feet.
t from
e suc-
emper-
t, plus
g ori-

UMPS

hat is
oper-
-pass

1946

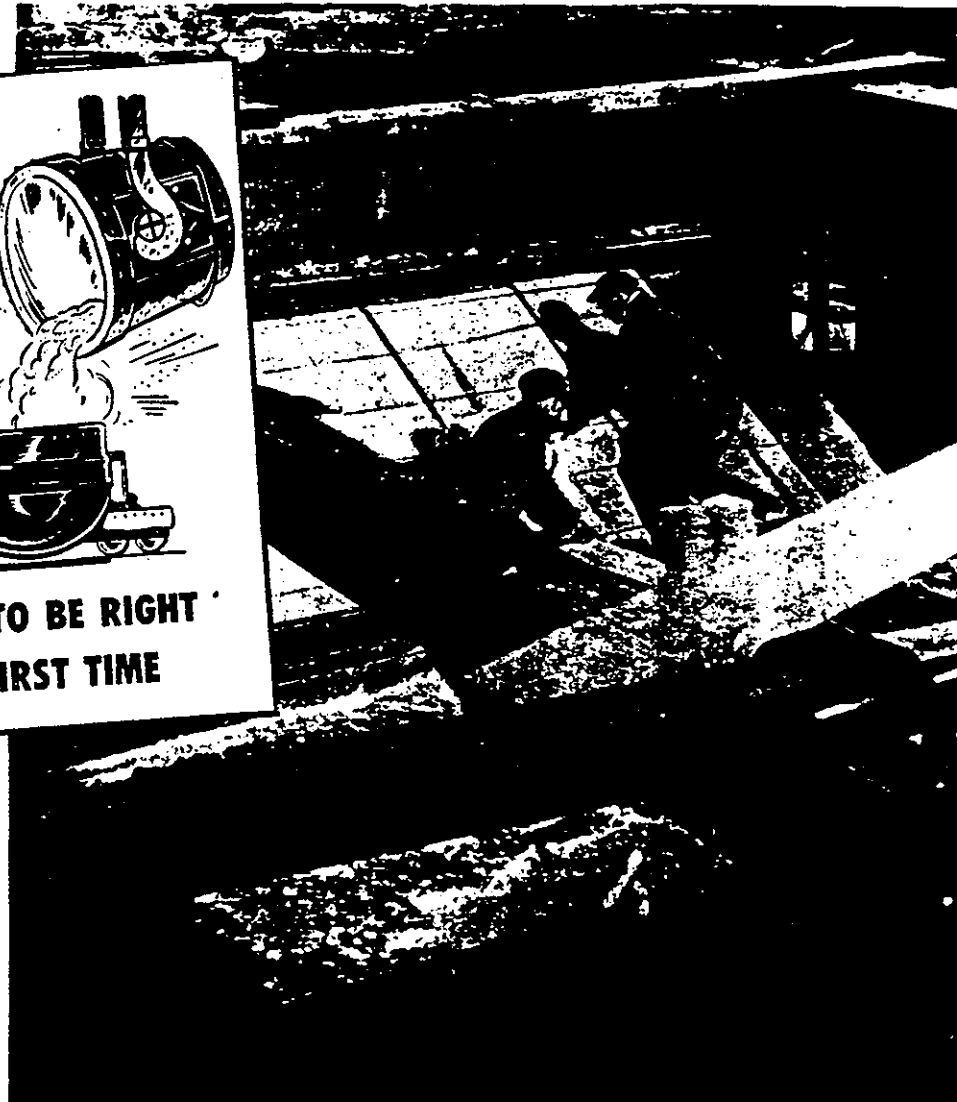

...that's why industry relies on J-M Insulations applied by J-M Applicators!

Good insulation alone is no guarantee of top fuel savings. To cut down heat waste and to keep on cutting it down through years of service, insulation must be *properly applied*.

That's where Johns-Manville can help you. J-M Insulation Engineers, and the facilities of the J-M Insulation Research Laboratory, are available to help you with specific problems, no matter how simple or complex. The J-M industrial insulation line offers a carefully engineered material for every service...

for every temperature from 400° F below zero to 2800° F above.

And you have positive assurance of proper application because J-M Insulation Applicators know exactly which material is right for each service...know how to apply it for greatest economies at installation and throughout years of service.

For details, write your nearest J-M Insulation Applicator, or Johns-Manville, Box 290, New York 16, New York.



JOHNS-MANVILLE *First in* INSULATIONS

Water

made on
difficulty
liquid is
ed. This
valves
seating
with com-
plicity to
live de-
ed sec-
with con-
ocess.
m does
sible to
a long
he per-
tenance
reezing
of the
where
can be
unding
e pipe
until
cal off
hstand

only in
e from
During
olated
ected
s by
nt of

(A.)

U

nd on
rove
ages,
the
glass
in-
mag-
seen
ving
d to

(.)

1946



Users applaud the high Rust-Inhibition of Eagle Super "66" Insulating Cement

Men who have used Eagle Super "66" Insulating Cement are enthusiastic not only about its great fuel-saving ability — they applaud the way Super "66" actually inhibits rust on heated metal equipment!

This unique rust-inhibitive quality has been conclusively proved by laboratory tests, and in actual use. It's an important factor in prolonging the life of boilers, ovens, tanks, towers, heat exchangers, etc.

"Springy Ball"



"Springy Ball" structure gives remarkable efficiency

The tremendous insulating efficiency of Super "66" comes from its "Springy Ball" pellets of Eagle Mineral

Wool. Each pellet is a maze of dead air cells — one of Nature's most effective barriers against passage of heat. "Springy Ball" structure is permanent — lasts as long as the insulation.

Eagle Super "66" withstands a full range of temperatures up to 1800° F. If not subjected to temperatures above 1200° F., it can be removed, remixed and re-used! An all-purpose insulation, it can be troweled with little effort on almost any size or shape surface. Wet coverage is as high as 65 sq. ft. per 100 lbs., 1 in. thick . . . and shrinkage is less than 15%.

Send for data sheets. They contain complete technical information about Eagle Super "66". Available on request.

Other Eagle Industrial Products include:

Eagle Insulseal. A protective coating for insulation. Trowels on — dries to a hard finish. Withstands temperatures up to 450° F.

Eagle Swtchek (black). A prepared, asphaltic base, rust-inhibitive anti-condensation compound.

Eagle "43" Finishing Cement. A hard white finish coating for all types of indoor insulation within a range from 70° F. to 800° F.

EAGLE-PICHER INSULATIONS High and Low Temperature



THE EAGLE-PICHER COMPANY • CINCINNATI (1), OHIO

Eagle Super "66" Insulating Cement • Eagle L-T and M-2 felt • Eagle Supertemp Block • Eagle Blankets • Eagle Pipe Covering
Eagle Insulseal • Eagle Loose Wool • Eagle Insulstic • Eagle Swtchek