PLAINTIFF'S EXHIBIT

MET-433

PML-335

[illegible] DIVISION OF [illegible]

Bridgeport, Conn.

• • •

The following report is a study of the dust conditions in the Bridgeport and Stratford, Conn. plants of the Raybestos-Manhattan, Inc. and was conducted in June, 1935. This survey is supplementary to the survey made in February and March, 1930.

• • • • • •

PLAINTIFF'S EXHIBIT

ML-4727

Exhibit D

PML 339

PCC EXHIBIT MET-150

The Bridgeport Plant

The Bridgeport plant engages in the weaving of broad-band lining and elastic facing and the treatment and processing of the same. The buildings and processes are the same as at the time of the first survey, but the majority of the looms have been changed from their previous locations.

The methods used in the collecting of dust samples and counting are identical with those given in reports of other plants of this company and as outlined in the United States Public Health Service Bulletin No. 144, Treasury Department, Washington, D.C.

Looms and Stock Run at Time of this Survey - 3rd Floor

Loom #4:
4 spools Fletcher
2 5/16 x 1/8 ring stock
2 9/16 x 1/8 " "
2 5/16 - 1032 male
2 7/16) 1030 - 1 cotton
) 1033 - 1 cotton
wet filling

Loom #10
12 spools C & E
2 x 1/4
2 1/4 x 1/4 Rayterine
2 1/2 x 1/4
1032 male yarn
wet filling

Loom #19
20 spools C & E
1 1/4 x 3/16 - 05
800 - 30% cotton yarn
1022 elas yarn

wet filling

Loom #20
20 spools C & E
1 1/2 x 5/32 - 05
[illegible] cotton yarn
1022 elas yarn wet filling and binder

Loom #12
12 spools C & E
2 9/16 x 5/32 ring stock
1030 - 1 cotton
1033 - 1 cotton

wet filling

Loom #11
12 spools Fletcher
2 x 3/16 Rayterine
1032 male yarn

wet filling

Loom #20
20 spools C & E
1 1/2 x 3/16 - 05
1 3/4 x 3/16
800 - 30% cotton yarn
1022 elas yarn

wet filling
dry binder

2nd Floor

Loom #9

12 space C & K
2 9/16 x 5/32 ring stock
1030 - 1 cotton yarn
1033 - 1 " "
wet filling
dry binder

Loom #10

12 space C & K
1 3/4 x 1/4 - 05
2 1/2
820 - 30% cotton yarn
1022 zinc yarn
wet filling
dry binder

Loom #24

12 space C & K
2 3/8 x 245 - 05
820 - 30% cotton yarn
1022 - zinc yarn
wet filling
wet binder

Loom #25

12 space C & K
2 x 3/16 - 05
820 - 30% cotton yarn
1022 - zinc yarn
wet filling
dry binder

Loom #27

16 space Fletcher
2 x 3/16 Raybestos
1032 mule yarn
wet filling
dry binder

Loom #30

16 space Fletcher
2 x 3/16 Raybestos
1032 mule yarn
wet filling
dry binder

Loom #44

6 space C & K
3 x 5/16
4 x 5/16 Free wheeling
4 1/2 x 5/16
1030-2 cotton yarn,
1033-1 cotton yarn
1032 - 1 cotton zinc yarn
1030 - 1 cotton yarn
wet filling
partially wet binder

Loom #45

10 space C & K
3 x 3/8
3 1/2 x 3/8 Raybestos
4 x 3/8
1033 mule yarn
wet filling
dry binder

Loom #50

20 space C & K
1 1/2 x 5/32 - 05
820 - 30% cotton yarn
1022 zinc yarn
wet filling
dry binder

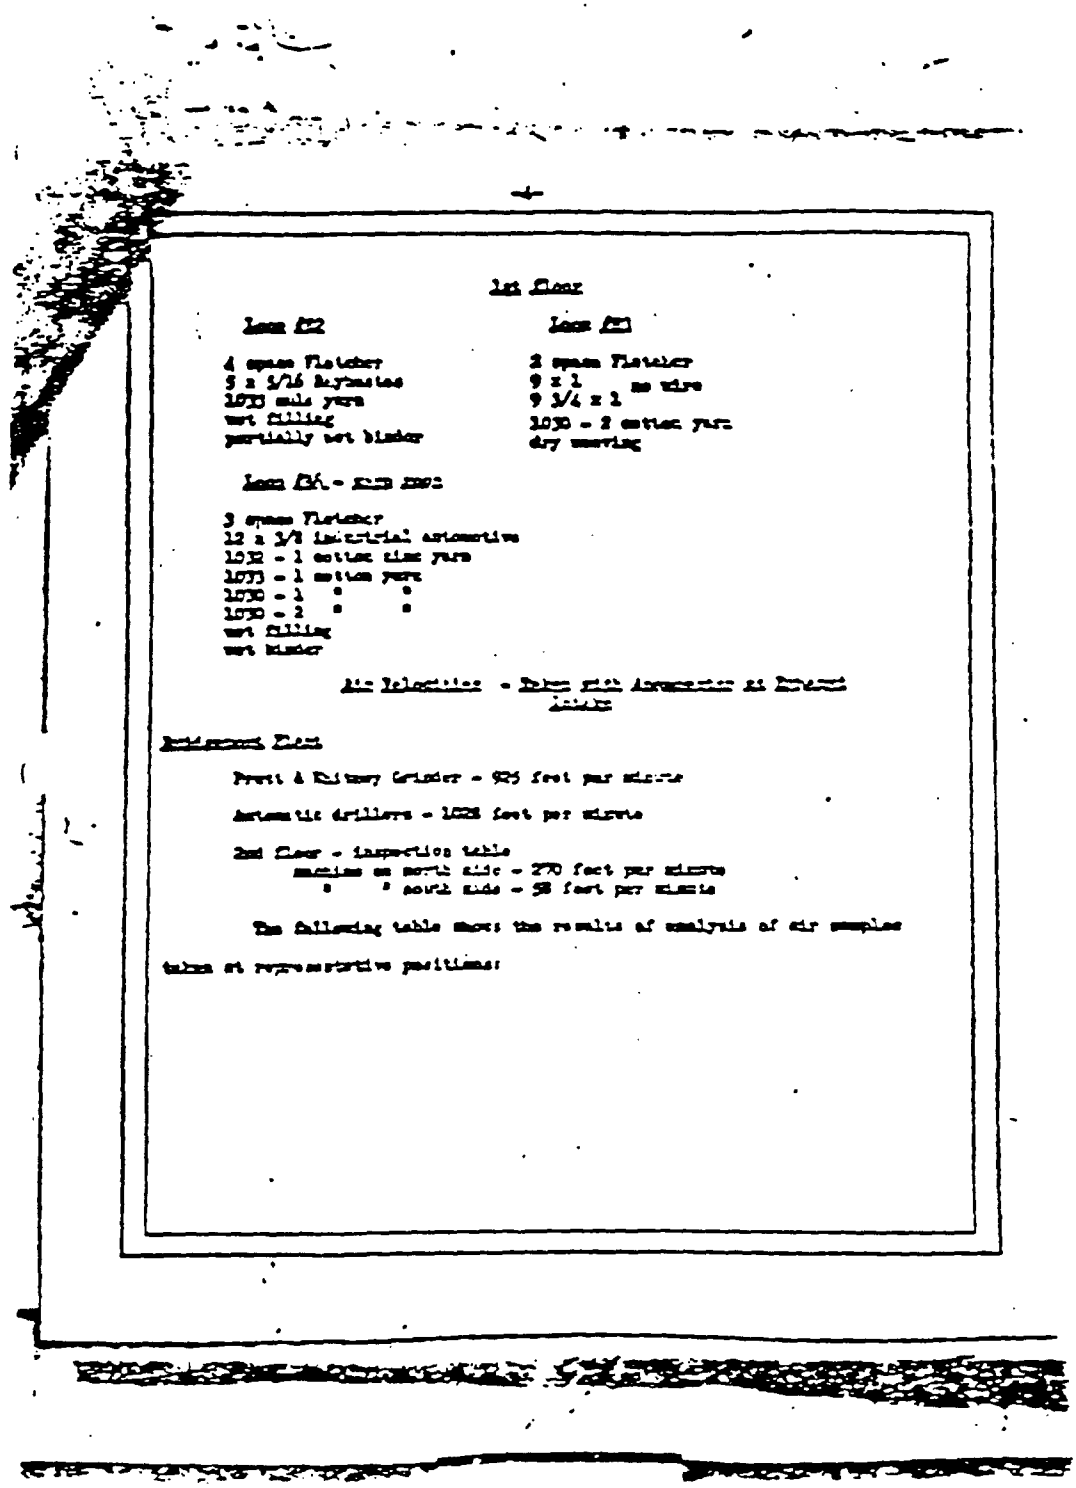

1st Floor

Loom #[illegible]

4 space Fletcher
5 x 5/16 Raybestos
1033 mule yarn
wet filling
partially wet binder

Loom #[illegible]

2 space Fletcher
9 x 1 no wire
9 3/4 x 1
1030 - 2 cotton yarn
dry weaving

Loom #[illegible] - [illegible]

3 space Fletcher
12 x 3/8 industrial automotive
1032 - 1 cotton zinc yarn
1033 - 1 cotton yarn
1030 - 1 " "
1030 - 2 " "
wet filling
wet binder

Air Velocities - Taken with Anemometer at Exhaust Intake

Bridgeport Floor

Pratt & Whitney Grinder - 925 feet per minute

Automatic drillers - 1028 feet per minute

2nd floor - inspection table
machine on north side - 270 feet per minute
" " south side - 58 feet per minute

The following table shows the results of analysis of air samples taken at representative positions:

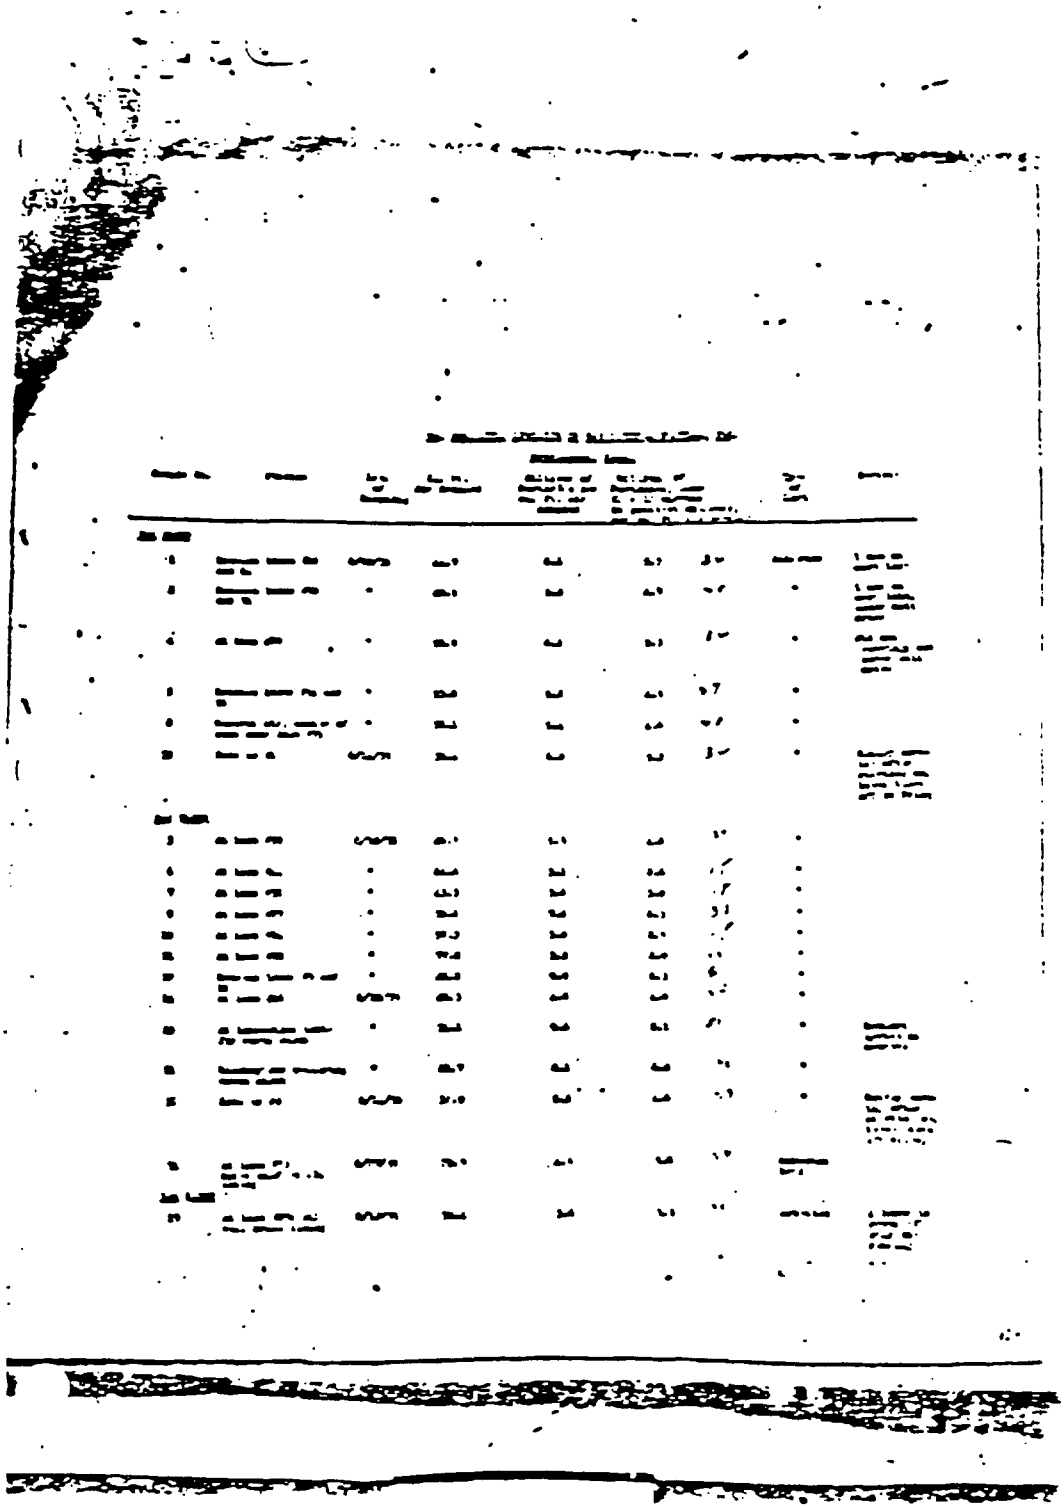

BARRETTOS DIVISION OF BARRETTOS-MANHATTAN, INC.

Bridgeport, Conn.

LEAD ANALYSIS

Sample No.	Station	Date of Sampling	Cu. Ft. Air Sampled	Milligrams of Lead per cu. ft. air sampled	Milligrams of Lead per cubic meter of air	Lead Intake in Milligrams on basis of workman breathing 10 cubic meters air in 10-hr. day	Type of Dust
24	At loom #29; Buick stuffed .04 lining	6/27/35	29.3	0.00065	0.023	0.23	Asbestos lead
20	General air near small press for clutch facing	6/23/35	36.8	0.000	0.000	0.00	Brake lining
23	Between two large knuckle presses; woven clutch facing	"	64.6	0.000	0.000	0.00	Clutch facing
26	Between two drill presses drilling rivet holes	"	25.5	0.000	0.000	0.00	Brake lining
25	Same as #26	6/21/35	29.6	0.000	0.000	0.00	"
27	At Pratt & Whitney grinder woven brake lining	"	27.6	0.00069	0.0244	0.244	"
31	General air machine shop	"	39.5	0.000	0.000	0.000	Brake lining clutch facing
24	General air - saturation room	6/20/35	97.6	0.000	0.000	0.000	-

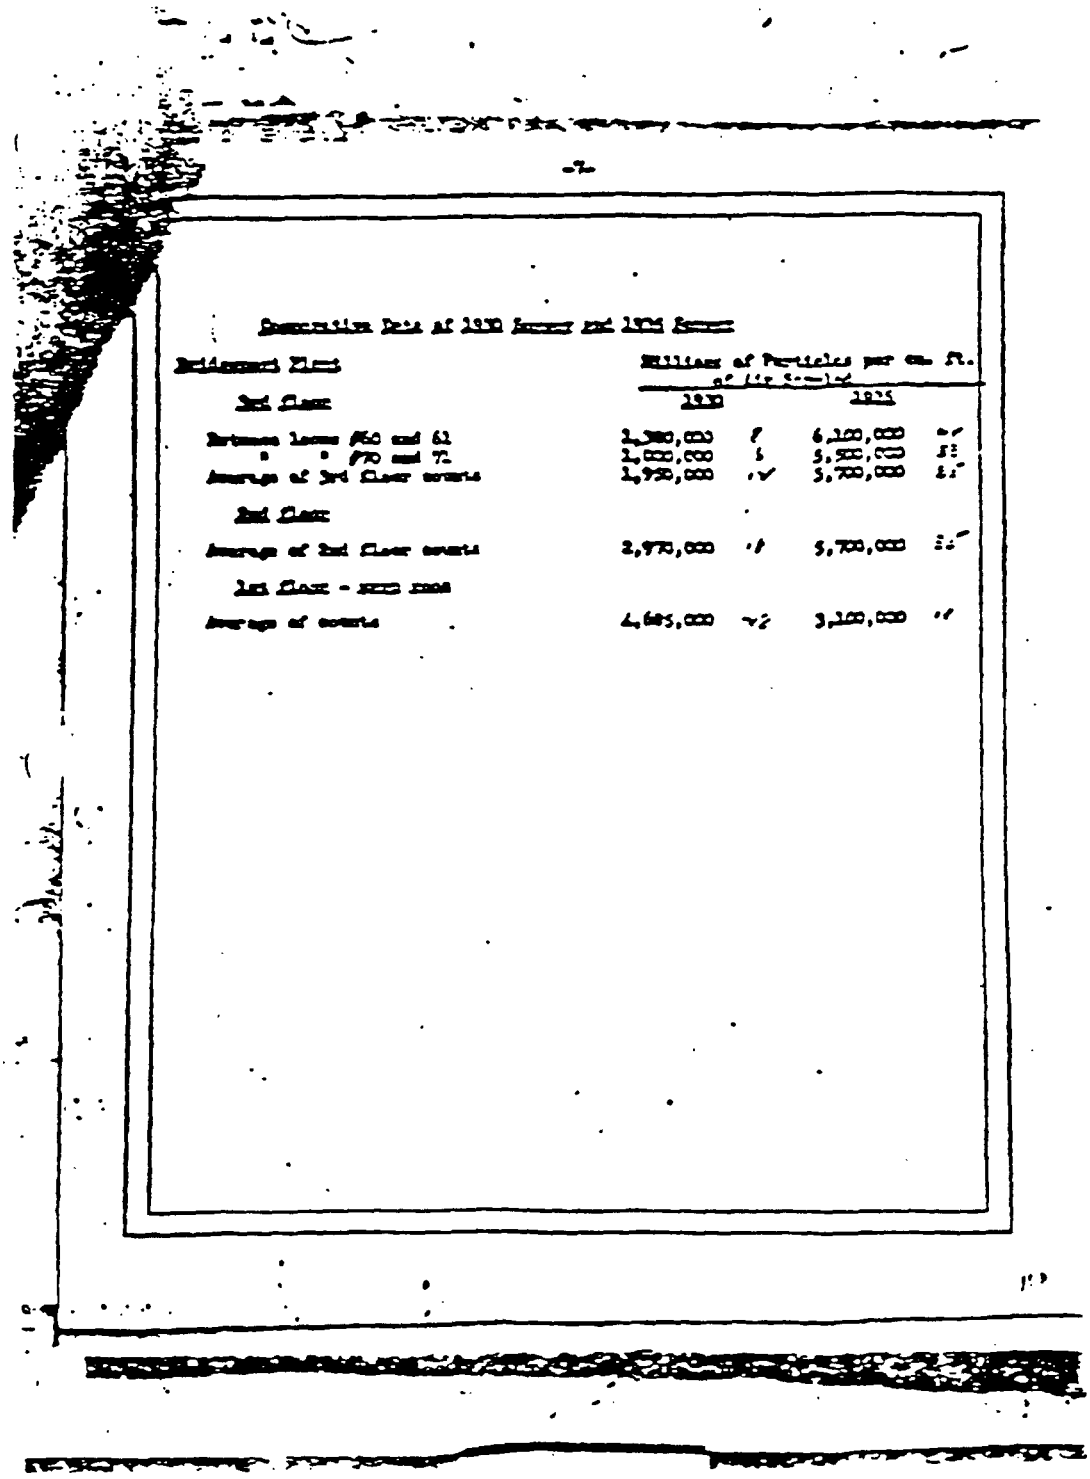

Concentration Data of 1930 Survey and 1935 Survey

Settlement Plant	Millions of Particles per cu. ft. of Air Sampled			
	1930		1935	
3rd floor				
Entrance lanes #60 and 61	2,300,000	#	6,100,000	##
" " #70 and 71	2,000,000	#	5,900,000	##
Average of 3rd floor counts	2,950,000	##	5,700,000	##
2nd floor				
Average of 2nd floor counts	2,970,000	##	5,700,000	##
1st floor - [illegible] room				
Average of counts	4,605,000	##	3,100,000	##

[redacted] - Retirement Plant

All of the dust counts in this plant show less than two million particles per cubic foot of air sampled. While these counts are not considered as dangerous concentrations, they are much higher than on the previous survey made in 1950, with the exception of those in the very room. All but four of the looms have been moved to different locations since the first survey. A check of the records would show a comparison of the type of yarn used and rate of production at the time of the two surveys.

Sample #15, taken at the inspection table on the second floor shows the highest count. The concentration at this point could be decreased materially by the proper exhaust equipment. The present system is not designed properly to take care of the dust generated.

Sample #14 shows the presence of lead. This amount is not considered dangerous, but it would be advisable to have the workers at these looms examined periodically for any signs of lead poisoning. The only sample in the Brake Department showing lead was sample #29. This is not considered a dangerous amount, but does indicate that there is a potential hazard present.

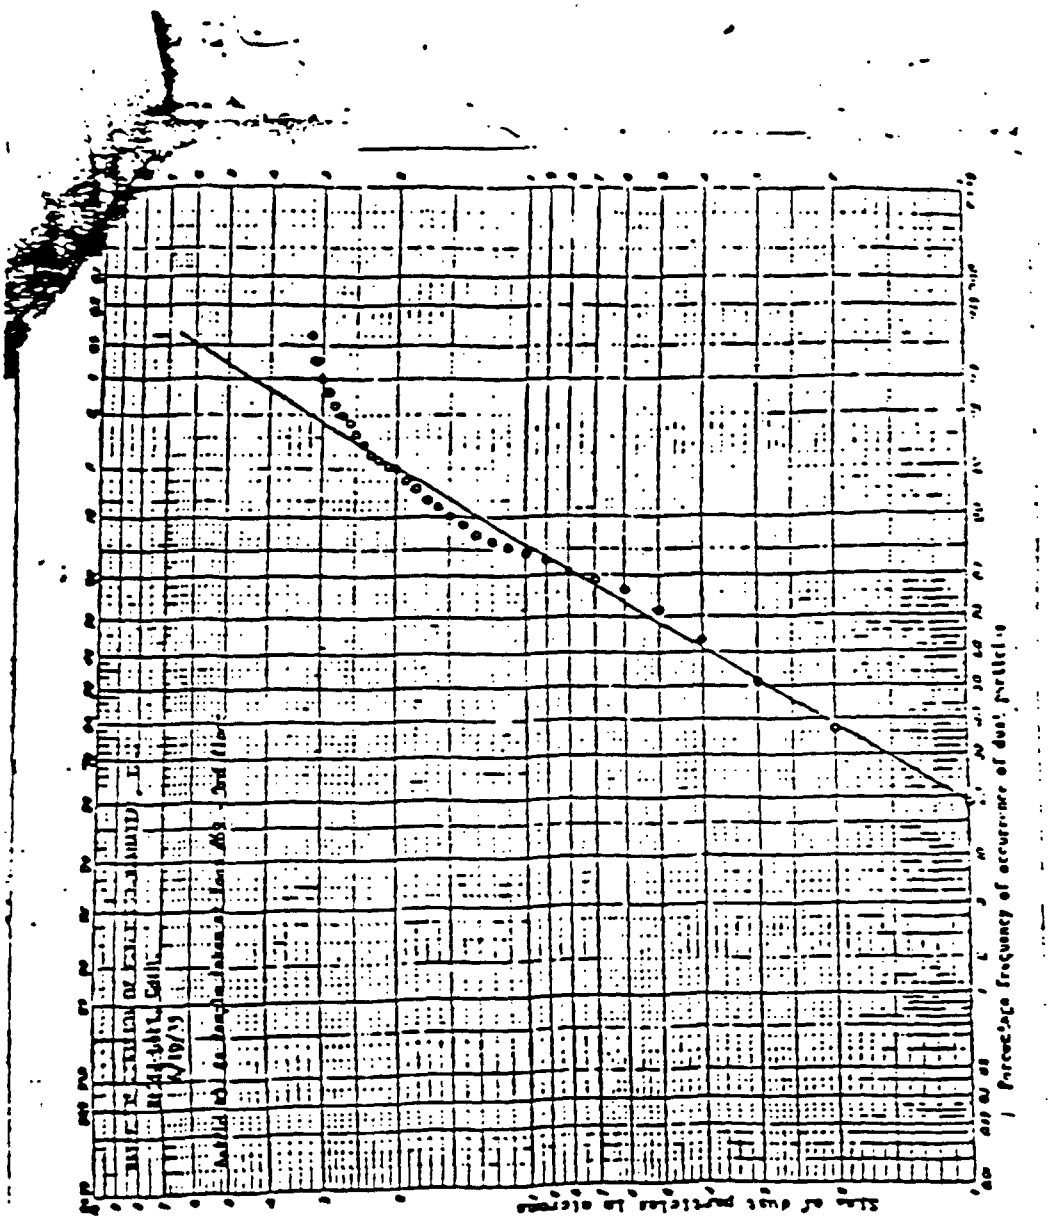

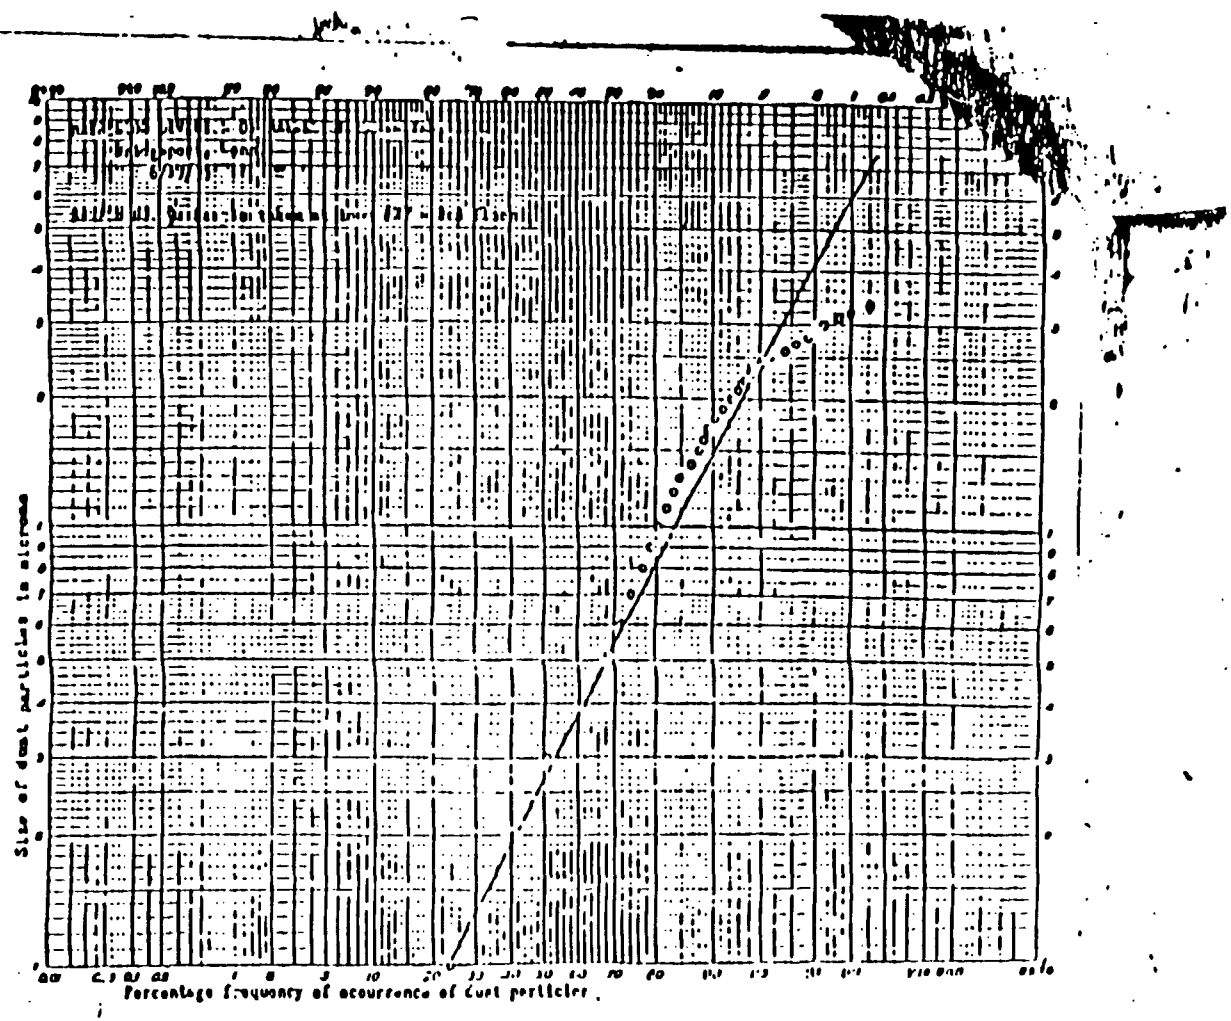
Size of dust particles in microns
Percentage frequency of occurrence of dust particles

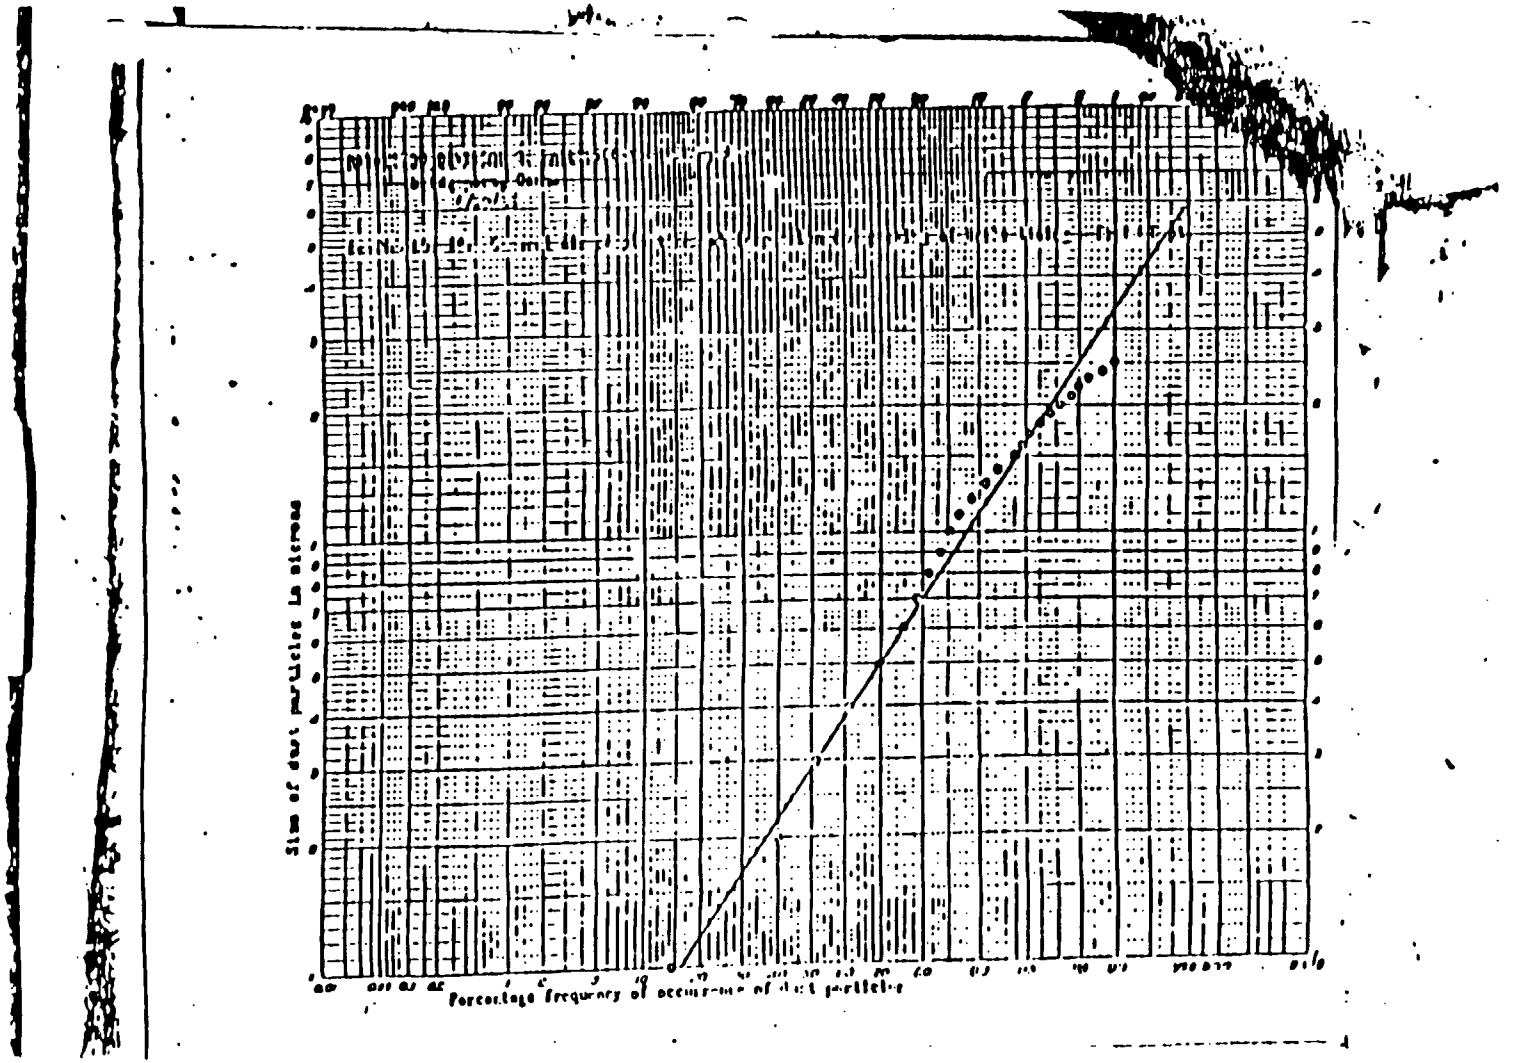
Size of dust particles in microns
Percentage frequency of occurrence of dust particles

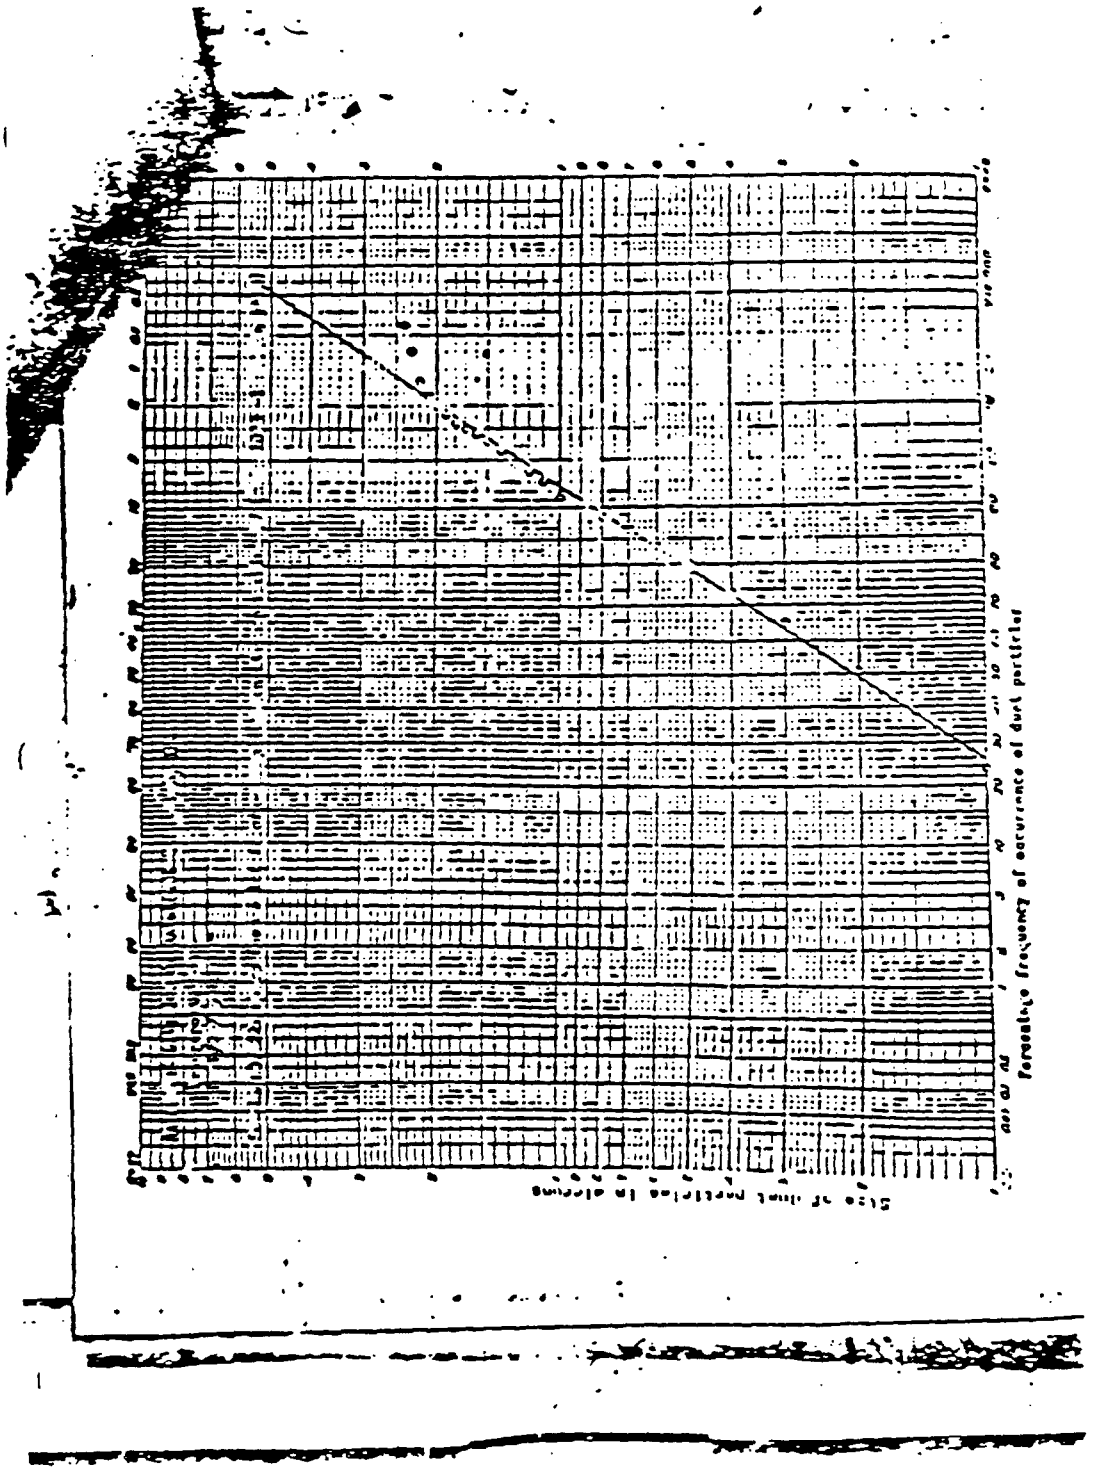
Size of dust particles in microns
Percentage frequency of occurrence of dust particles

Stratford Plant

The Stratford plant engages in the manufacture of molded brake lining, molded clutch facing and packing.

The molded type brake lining is made in two different processes. One type is made by mixing asbestos, rubber, litharge, clay, whiting, sulphur, zinc oxide and high test gasoline in a mixer. This mixture is formed into sheets by ordinary rubber mills with heated rolls. The sheets are cut into strips for brake lining.

The second type is made of a mixture of rubber, asbestos, litharge, sulphur, zinc oxide and resin. This dry mixture is also into sheets by means of an hydraulic press. The sheets are cured in steam-heated presses. Strips for brake lining are cut from these sheets. Both types of lining are ground to width and thickness on Gardner grinders or Blanchard grinders. The lining is formed into arcs in heated presses and holes are drilled for rivets on automatic drill presses.

Molded type clutch facing is made from asbestos board. Asbestos and water are mixed in beaters to a pulp. This pulp is made into sheets on wet process machines. The sheets are dried in ovens and rolled to thickness in calenders. The large sheets are cut into strips from which the clutch facing rings are punched. The rings are impregnated in large tanks. Different specifications call for different saturants. The rings are ground to thickness on Blanchard grinders. The inside diameters are ground in internal grinders and the outside diameters are ground on external grinders. Rivet holes are drilled on automatic drillers. The finished clutch facing is then inspected

before packing for shipment. Sheet packing is made from a mixture of asbestos, rubber, litharge, whiting, sulphur, zinc oxide and high test gasoline. These materials are mixed in closed mixers. The wet mix is made into large sheets in mills with heated rolls. It is either sold in large sheets or it is cut into gaskets or rings on punch presses. The vapor arising from the heated rolls, due to the gasoline, is collected by hoods and pipes and reclaimed in two large condensers.

The following tables show the results of analyses of air samples taken at representative positions:

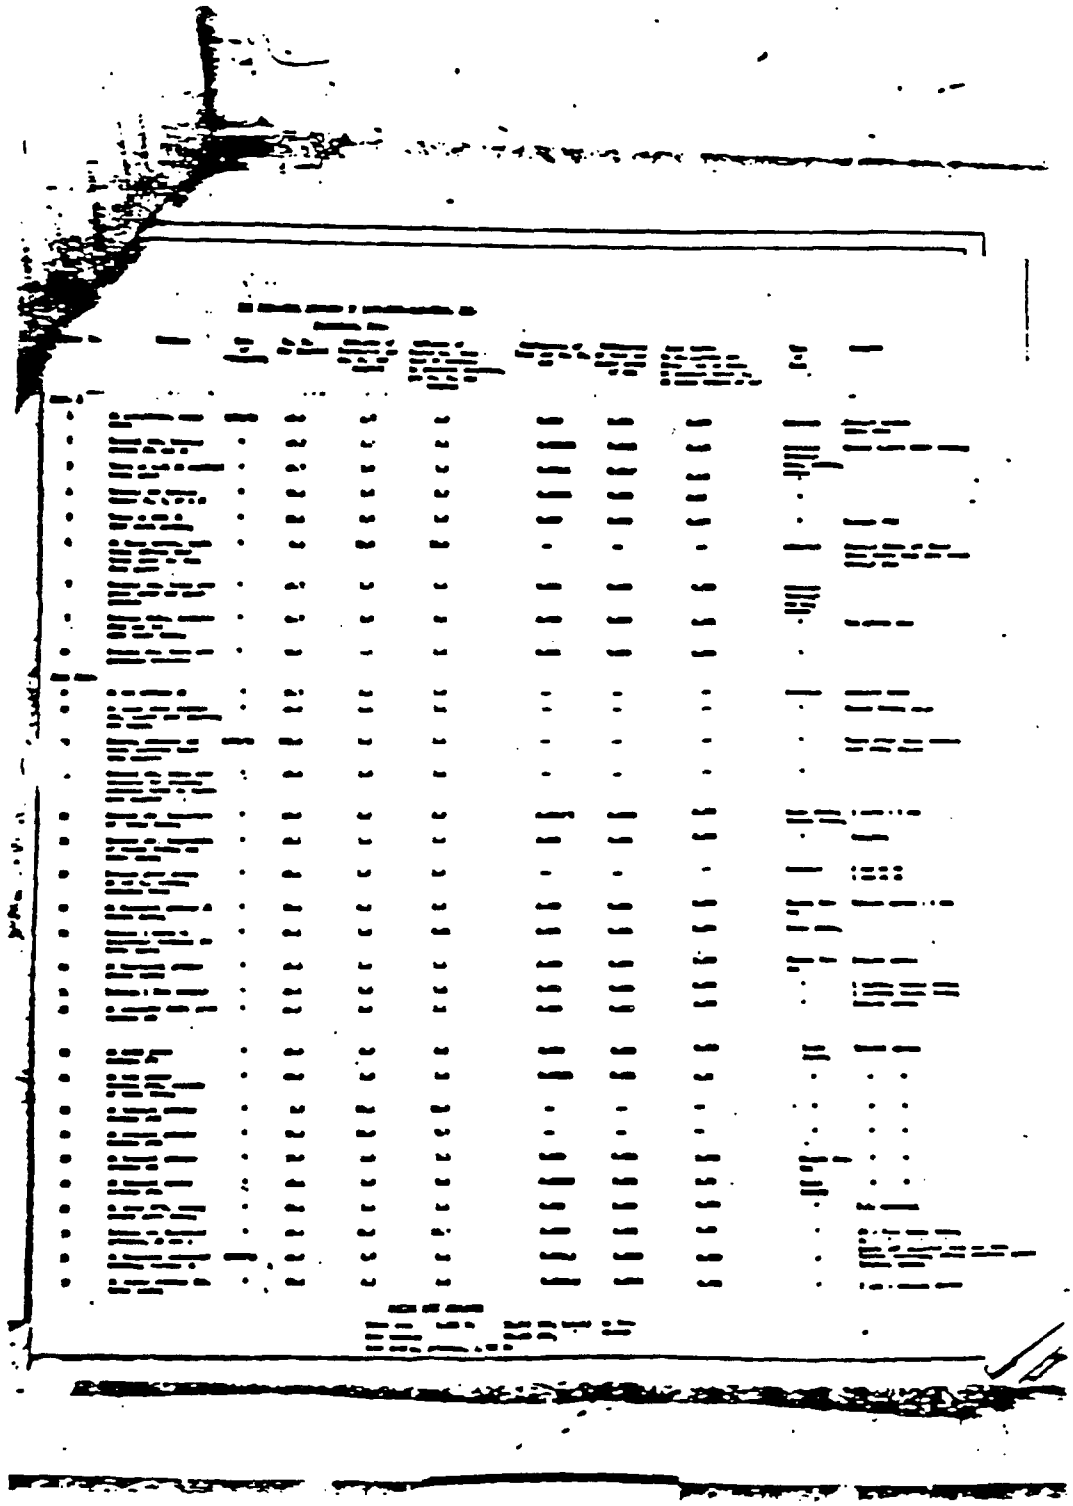

Comparative Data of 1930 Summer and 1935 Summer

Stratford Plant

	1930	1935
Cincinnati grinder	655,000	1,400,000
Filling heaters	529,000	1,400,000

Air velocity readings - taken with [illegible]

Fibre room - pulverizer -	590	feet	per	minute	
fibre opener	1450	"	"	"	
Blanchard grinder #4 - -	590	"	"	"	(right side)
	1514	"	"	"	(left side)
Drill press machine #70 - -	572	"	"	"	
Internal grinder machine #102					
large opening -	1111	"	"	"	
small openings	[illegible]	"	"	"	
External grinder machine #105	200	"	"	"	
Sander machine #[illegible]	7[illegible]	"	"	"	

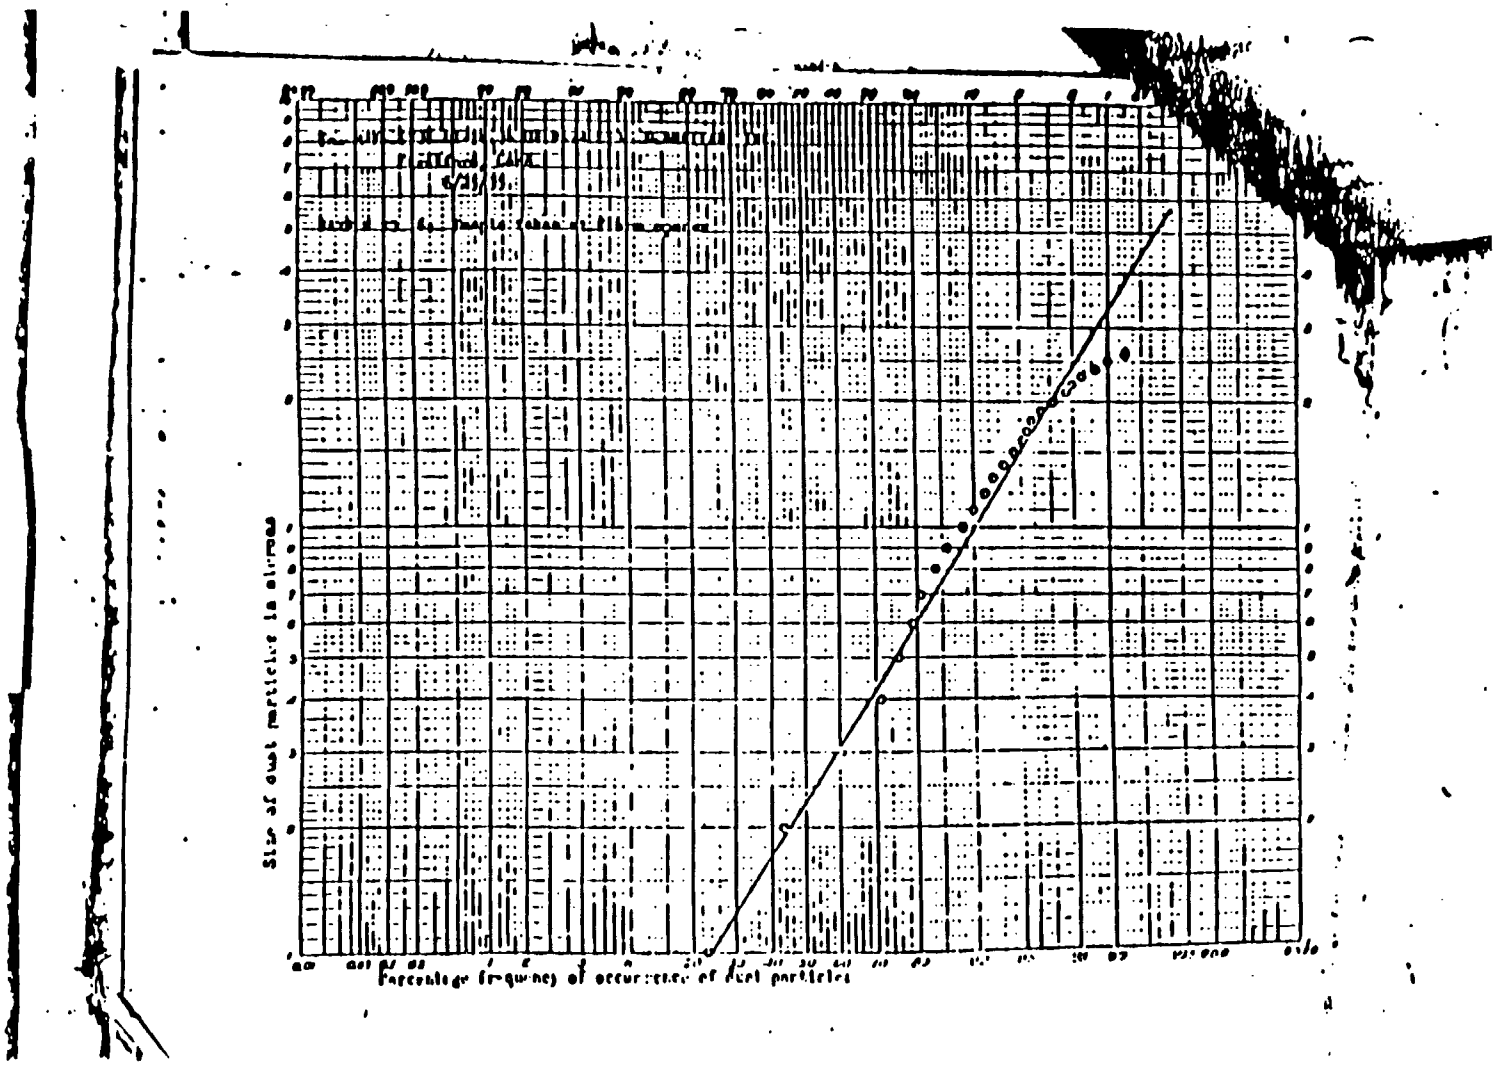
Size of dust particle in microns
Percentage frequency of occurrence of dust particles

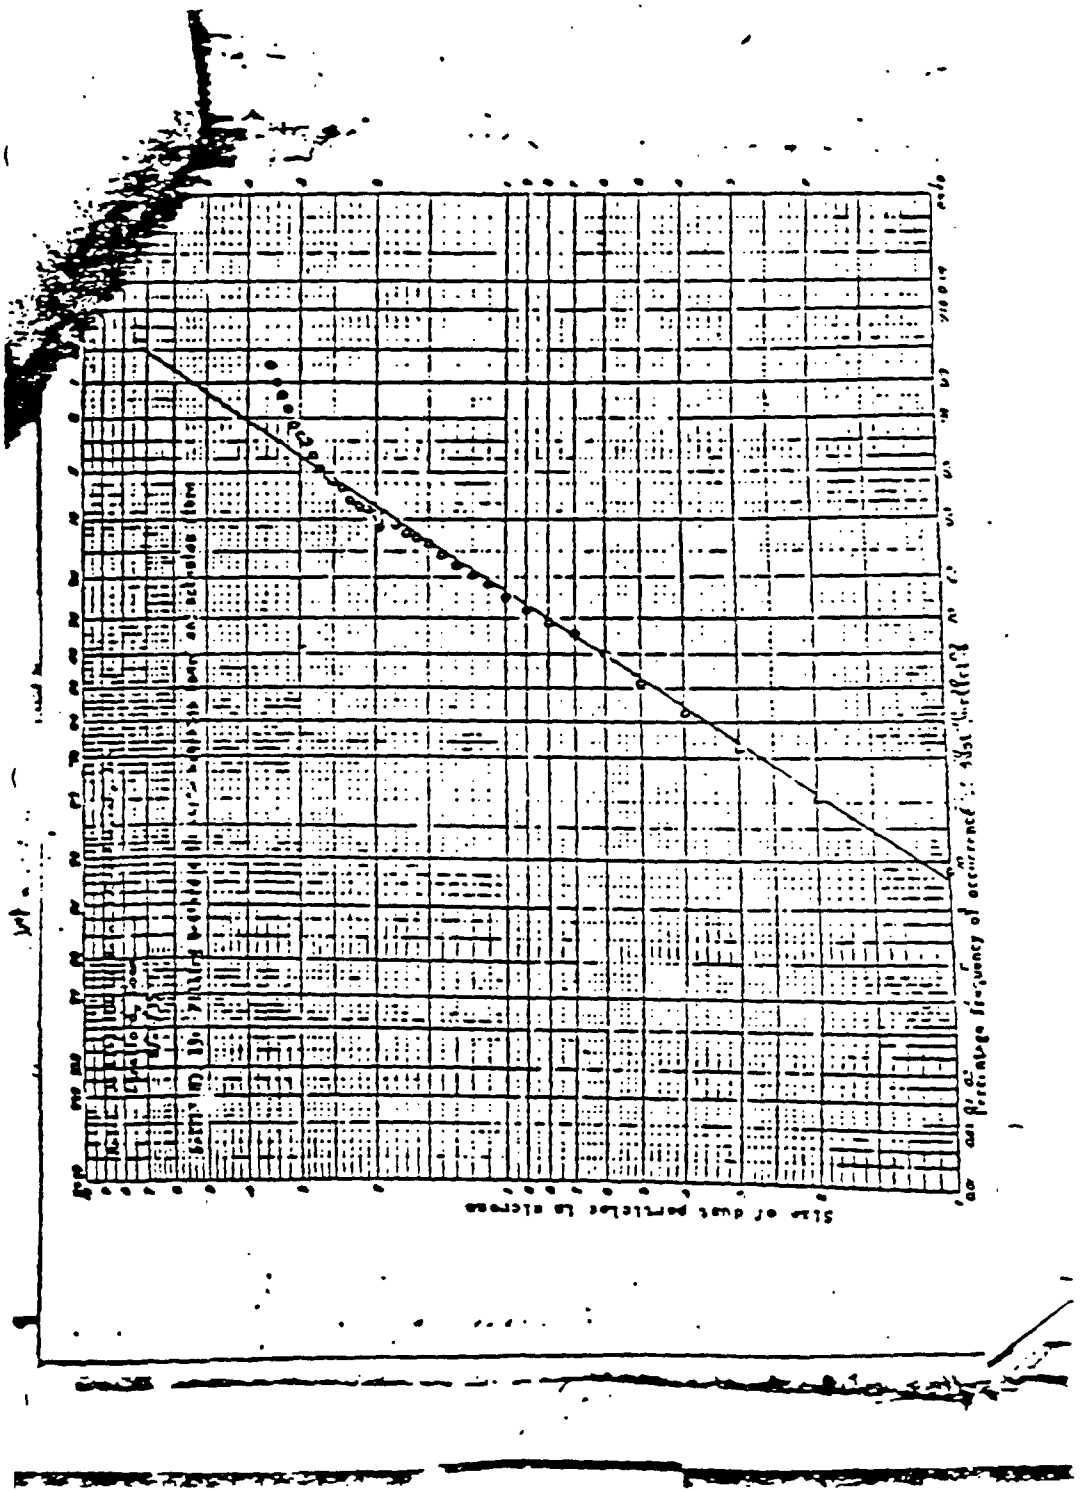

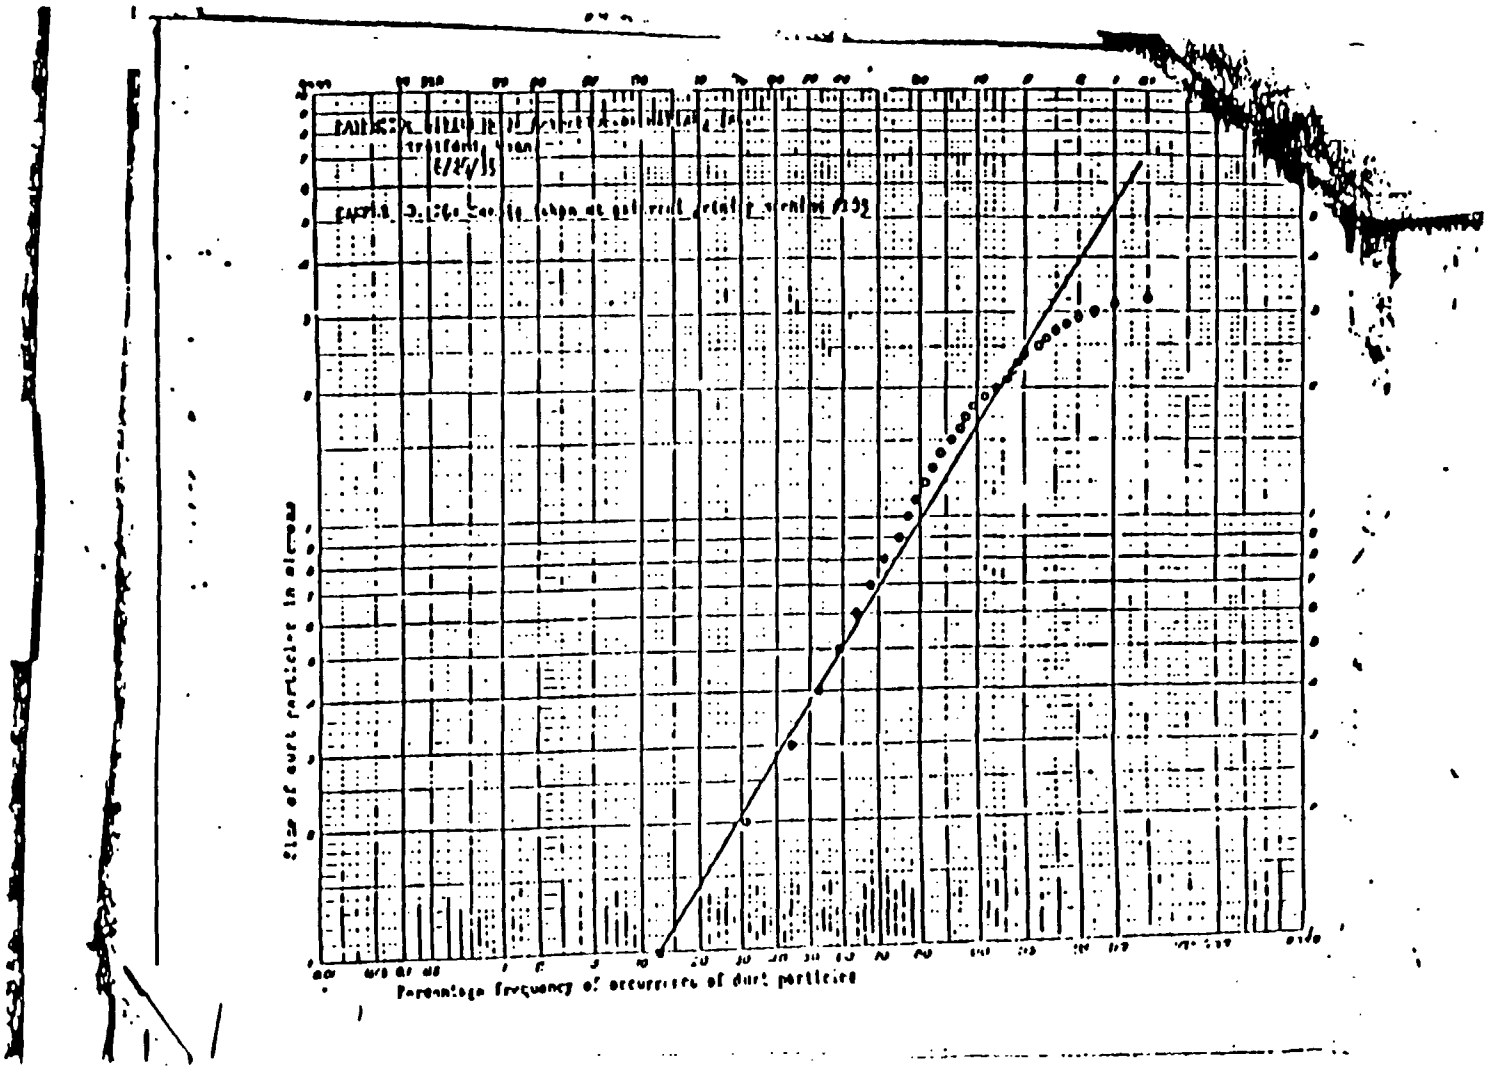
Size of dust particles in microns
Percentage frequency of occurrence of dust particles

[redacted] - Stratford Plant

Sample #6 taken at the fibre opener shows a high dust count. This is accounted for by the method of handling the fibre and not the opener itself. The fibre is dumped from bags onto the floor and then shovelled into the opener. The fibre is carried to a hopper above and then falls through a pipe into a truck which is located about six feet from the opener. The operator stands between the opener and the truck and shovels the fibre into the opener at the same time that it is falling into the truck. The dust concentration at this point would be decreased by the proper handling of the fibre.

Samples #2, 3 and 4 show that there is lead present in the air at these points. While these samples do not show a dangerous amount, it would be well if the workmen employed at these places were examined periodically for signs of lead poisoning. Notice was taken at the time of this survey of the method of handling litharge. This material is handled carelessly as it can be found lying on the floor in the room where it is weighed and around the mixers.

Sample #13 shows a low count. Three men were engaged in filling the hoppers. Practically all of the material put into the beaters was waste asbestos board. Very little raw asbestos was added. No doubt the count at this position would be higher if more raw asbestos fibre were used out of the bags. It is recommended that the bags of asbestos fibre be stored in a room isolated from the remainder of the plant. This would eliminate dust generated in the piling and unpiling of these bags in the room and expose more people to the dust than is necessary.

Samples #15, 24, 28, 30, 31 and 32 all show that lead was present in the air sampled. Sample #30 is the only one that approaches a dangerous amount.

This sample also shows a high dust count. The high dust count at the two Blanchard grinders #3 and 4 is due to the method of handling the brake lining during the grinding operation. This lining is the P.C. molded type and a number of strips are placed together for grinding of the edges. After the edges are ground on one side, the operator blows off the clinging dust with an air hose and reverses the strips to grind the opposite edges. This type of grinding should be done on the grinding machines designed for this particular work. It was observed that a great amount of the dust present in the air is caused by the handling of the material after grinding. Dust clings to the individual pieces, and when the stacks are moved about they are not put down carefully. This results in dust clouds arising.

Samples #25 and 26 show high counts. Large size brake lining was used at the time these samples were taken. It was observed that the exhaust hood on machine #105 did not catch all of the dust from this type lining. Then smaller sizes of lining are ground on this machine the hood recess to catch most of the dust generated. The hood should be changed to take care of all sizes of lining ground on this machine.

HEALTH HAZARDS

Asbestos dust gives rise to a pneumoconiosis or fibrosis of the lungs which has been discussed in the previous report made on the asbestos industry. Developments in our knowledge of asbestosis are continually taking place and a summary of any new facts discovered will be added to the general composite report of the asbestos plants survey which is to be brought out later.

Mica belongs to the class of materials in which silica occurs in a combined form known as silicates. Little or nothing is available in the literature with regard to the effects of this dust on the lungs, though it seems likely that it belongs with the more mildly injurious dusts. Our present knowledge of the effects of the silicates is meagre, but work is being carried on in various quarters in an attempt to determine their classification more accurately with regard to health. Experimental investigation of mica dust was made recently by A. Policard of the University of Lyons, France.(1) His conclusions from observations on white rats were that these dusts are noxious to the lung tissue, resulting after a time in changes in the cells and in phagocytosis and producing a mildly chronic fibrosis similar to that seen in silicosis. Mica particles grouped in plaques were found in the alveolar tissues. With his conclusions regarding the theory that sericite is the chief factor in the causation of silicosis, authorities in this country cannot agree, although the matter is constantly receiving attention.

Toxicity of Lead in Rubber Mixing (Litharge - red or yellow oxide of Lead)

Compounding and mixing are the most hazardous processes in rubber making. If these processes are properly isolated from the rest, concentra-

(1)Policard, A., The Action of Mica Dust on Pulmonary Tissue, Journal of Industrial Hygiene, Baltimore, Vol. XVI, No. 3, May, 1934, pp. 160-164.

timely for workers need remain exposed.

Lead poisoning is the commonest of the industrial intoxications. The toxicity of lead depends upon a number of factors such as : the form of lead taken into the body - vapour, dust or solid; the solubility of the lead compound in human tissues; the mode of entry of lead into the body - inhalation, ingestion or skin absorption; the extent of exposure; individual susceptibility which is heightened by numerous conditions particularly by previous attacks of poisoning.

Among the most readily toxic of the inorganic lead compounds are the oxides, the carbonate, the sulphate and the chromate.

Lead is a cumulative poison and, with a few exceptions, industrial lead poisoning is usually a chronic condition caused by the inhalation or ingestion of small amounts of soluble lead over long periods of time. This process of poisoning may go on slowly for a long period without manifesting any of the characteristic acute symptoms. Lead inhaled, however, is far more rapidly and surely toxic than lead swallowed, since it reaches the blood stream more directly and comparatively little is eliminated unabsorbed.

There is little agreement in the estimates made by various authorities on the minimum amount of lead which can cause poisoning if taken into the body. For practical guidance, however, it can be assumed that from 1 to 2 milligrams taken in daily over a period of months or years may cause poisoning. A number of factors also enter into the estimation of the amount of air breathed by a man at active work during the working day. Ten cubic metres of air in a ten hour day is an estimate which very probably errs on the safe side for the average workman. On the basis of these calculations, the lead content of the air of workrooms where men are continuously exposed should be kept as low as

...l of a milligram per cubic meter of air or else strict measures for protection should be installed to prevent poisoning.

The symptoms of chronic lead poisoning are many and may manifest themselves through the gastro-intestinal tract as in the familiar "lead colic" or the nervous system or both. Among the symptoms most commonly noted are colic, metallic taste in the mouth, obstinate constipation and loss of appetite, muscular weakness, particularly of the hands and wrists, neuritis and joint pains, loss of weight, headache, dizziness, nausea or vomiting, gastric distress or fatigue are among the minor symptoms that may or may not be present.

The principal diagnostic signs for the detection of lead poisoning in its early stages or of lead absorption, which is essentially pre-clinical poisoning before the onset of symptoms, are sallow pallor of the skin, tremor, lead line on the gums, stippling or basophilic degeneration of the red blood cells, hematoporphyria in the urine and mild secondary anemia. Other abnormalities in the blood which are characteristic of lead poisoning are polychromatophilia, changed relative proportions of lymphocytes and polymorphonuclear leukocytes, increased normoblast cells and increased reticulocytes.

Repeated physical examinations should be made of workers exposed to lead at fairly short intervals of from two to six months, depending upon the severity of exposure. It is important to prevent the occurrence of lead poisoning, since, even though it is not often fatal under modern conditions, it frequently results in premature development of chronic degenerative conditions in the circulatory system.

The physiochemistry of lead poisoning and the treatment to be pursued have been the subject of intensive experimentation and study by Aub[2] and his

(2)Aub, J.C., et al, Lead Poisoning, Williams and Wilkins, Balt. 1926, pp. 265.

associates at the Harvard School of Public Health and by Kehoe[3] and his colleagues of the University of Cincinnati.

Toxicity of Various Solvents and Plastics

Benzol is by far the most hazardous of the solvents commonly used in industry. It has been established that the maximum allowable concentration for prolonged exposure is 100 parts per million. Because of its recognized and very serious danger to the health of operatives, its use as a solvent in spray coating operations has been largely supplanted by less toxic substances or by its less harmful homologues toluol and xylol. These substances are not necessarily less dangerous to life if breathed in, but, because of a lower volatility and a marked odor, they are less likely to escape unnoticed into the atmosphere. Moreover, they do not damage the blood forming organs causing chronic permanent injury to health to the same extent as does benzol. Solvent naphtha derived from benzol is a mixture of toluol and xylol and in the same class with these substances with regard to health hazard, while petroleum naphtha is classed with benzine, gasoline, the chlorinated hydrocarbons and with the alcohols, acetates and ketones, and with which severe poisoning is rare. Whether or not these substances have any action on the blood is still controversial. Usually poisoning by them is of the acute anesthetic type. The effects due to exposure to heavy fumes are headache, nausea, dizziness, blurred vision, mental confusion and loss of consciousness. These effects generally disappear fairly quickly in fresh air. Chronic effects from prolonged exposure are less definite but similar, with muscular weakness, tremors, and various nervous disturbances.

Of the alcohols, all highly soluble, methyl alcohol or methanol is one of the most toxic to human beings when inhaled, inasmuch as it is not oxidized in the body to the same extent as ethyl alcohol which is otherwise more toxic.

(3) Kehoe, R.A., Thorman, F., Chalek, J., On the Normal Absorption and Excretion of Lead, Univ. Journal of Industrial Hygiene, Sept. 1933.

Some degree of tolerance can be developed to the anesthetic effect of the alcohols, particularly ethyl alcohol, probably due to acceleration of the normal rate of oxidation.

While methyl, butyl and amyl alcohol are increasingly toxic judged by their respective [illegible] poisonous actions, this property is offset, as far as their [illegible] aspect is concerned, by a decreasing volatility and solubility.

As is the case with benzol, the toxicity of methanol has been blamed on its impurities, but there is ample evidence of a sound nature that methanol itself is the chief toxic factor. The effects of the vapor, accumulating as it readily does in the body, are directly poisonous to the nervous system, and have a special affinity for the retina. Large doses cause prolonged coma, blindness and death. The minimal toxic dosage is not well established. Henderson and Haggard[4] quote Leevy as putting it at 200 parts per million for experimental animals if inspired over a long period. It has been recommended that the concentration should be kept below 1 part per 10,000 parts of the air, or 100 parts per million.[5] Methyl alcohol, in addition to its toxicity, has an irritating effect on the skin.

Bakelite - Formaldehyde Fumes

Practically nothing is known regarding the possible effects of bakelite dust on the respiratory system. The phenols in its composition might be potentially harmful if exposure to them in the form of concentrated vapors was sufficient. Cases of poisoning due to inhalation of formaldehyde vapors, except by accident, however, are rare due to its extremely irritating effect on the [illegible] which usually [illegible] from the

(4) Henderson, Yandell, and Haggard, H.W. (Yale University), Noxious Gases; Chemical Catalogue Co., Inc., N.Y.C., 1927, p. 157.
(5) International Labour Office, Occupation and Health Brochure No. [illegible], Geneva, 1926.

fumes before injury occurs. Concentrations of formaldehyde in excess of 20 - 200 parts per million may cause symptoms.[6]

In one case studied by a factory medical inspector in Holland marked nervous disorder with strong somnolence was attributed to such fumes.[7]

Skin affections due to bakelite are of frequent occurrence and are popularly known as "bakelite itch". The face and forearm are most commonly affected in workers handling these resins. Skin lesions are especially prevalent under conditions favoring perspiration. They may be avoided, therefore, by provisions for good ventilation and by frequent washing of the exposed skin in alkaline solutions. Unusually sensitive persons should be removed from this type of work.

Linseed Oil

In addition to the danger of spontaneous combustion, linseed oil when heated gives off irritating fumes of acrolein. No chronic ill-effects have been noted from this substance though it is irritating to the mucous membranes of the eyes, nose, and throat. The addition of resins to the mixture gives rise to volatile ethereal oils which have caused headaches, nausea and even stupor. Although Dr. Barnes[8] in a study of linseed dermatitis did not find the pure oil as irritating as linseed cake, dermatitis or infections, especially of the hands are common in workmen who come in contact with either of these substances.[9] Workers showing hypersensitivity to the oil may have to be removed from the work.

(6) Seyers, R.R. and Dallavalle, J.M., Prevention of Occupational Diseases, Mechanical Engineering, April, 1935, p. 232.
(7) International Labour Office, Geneva, 1928, Occupation and Health, Brochure #115, Bakelite.
(8) Barnes, M.E., M.D., Linseed Dermatitis, Journal of Industrial Hygiene, Vol. XXXI, No. 2, February, 1931, pp. 49-55.
(9) U.S. Public Health Service, Treasury Dept., Wash. D.C., Public Health Bulletin No. 215, Skin Diseases in American Industry, 1934, pp. 41-45.

Skin Diseases

In addition to the toxic properties of the substances handled, occupational skin diseases due to rubber compounds, to accelerators and anti-oxidants is very common in rubber workers and in those exposed to the above solvents and oils, especially those derived from coal tar products. There is attached our booklet entitled "Prevention of Oil Pimples" which describes some of the protective measures with which these skin troubles may be decreased.

One of the most frequent causes of dermatitis in the rubber industry is hexamethylenetetramine used as an accelerator and phenylenediamine or similar coal tar compounds. A one per cent solution of "hexy" is said to be sufficient to cause dermatitis and is but further [illegible] is almost inevitable if this substance is carelessly handled.

It is not, perhaps, sufficiently well understood that continued exposure to certain of these skin irritants may develop a sensitivity in workers who did not at first appear to be susceptible. Once dermatitis from "hexy", for instance, has occurred, the individual is sensitized to the substance and, much as with poison ivy, is unable to tolerate even slight exposure thereafter without skin outbreaks. Heat usually quickens the reaction.

Protective ointment containing alkali has been recommended.

Fat, oily-skinned persons are usually more resistant to the irritating effects.

Those having frequent outbreaks of dermatitis or those found sensitive to these substances through patch tests should be transferred to other occupations.

Protective work clothing with provisions for changing it and good facilities for washing, together with the enforcement of rules regarding personal cleanliness, helps to prevent both skin troubles and cases of poisoning.(15)

Chrome

Chrome compounds and the health hazards associated with them are discussed in the accompanying booklet "Protection of Workers Exposed to Chromium and Its Compounds".

(15) U.S. Public Health Service, Public Health Bulletin #215, Skin Hazards in American Industry, Government Printing Office, Wash. D.C., 1934, pp. 1-10.

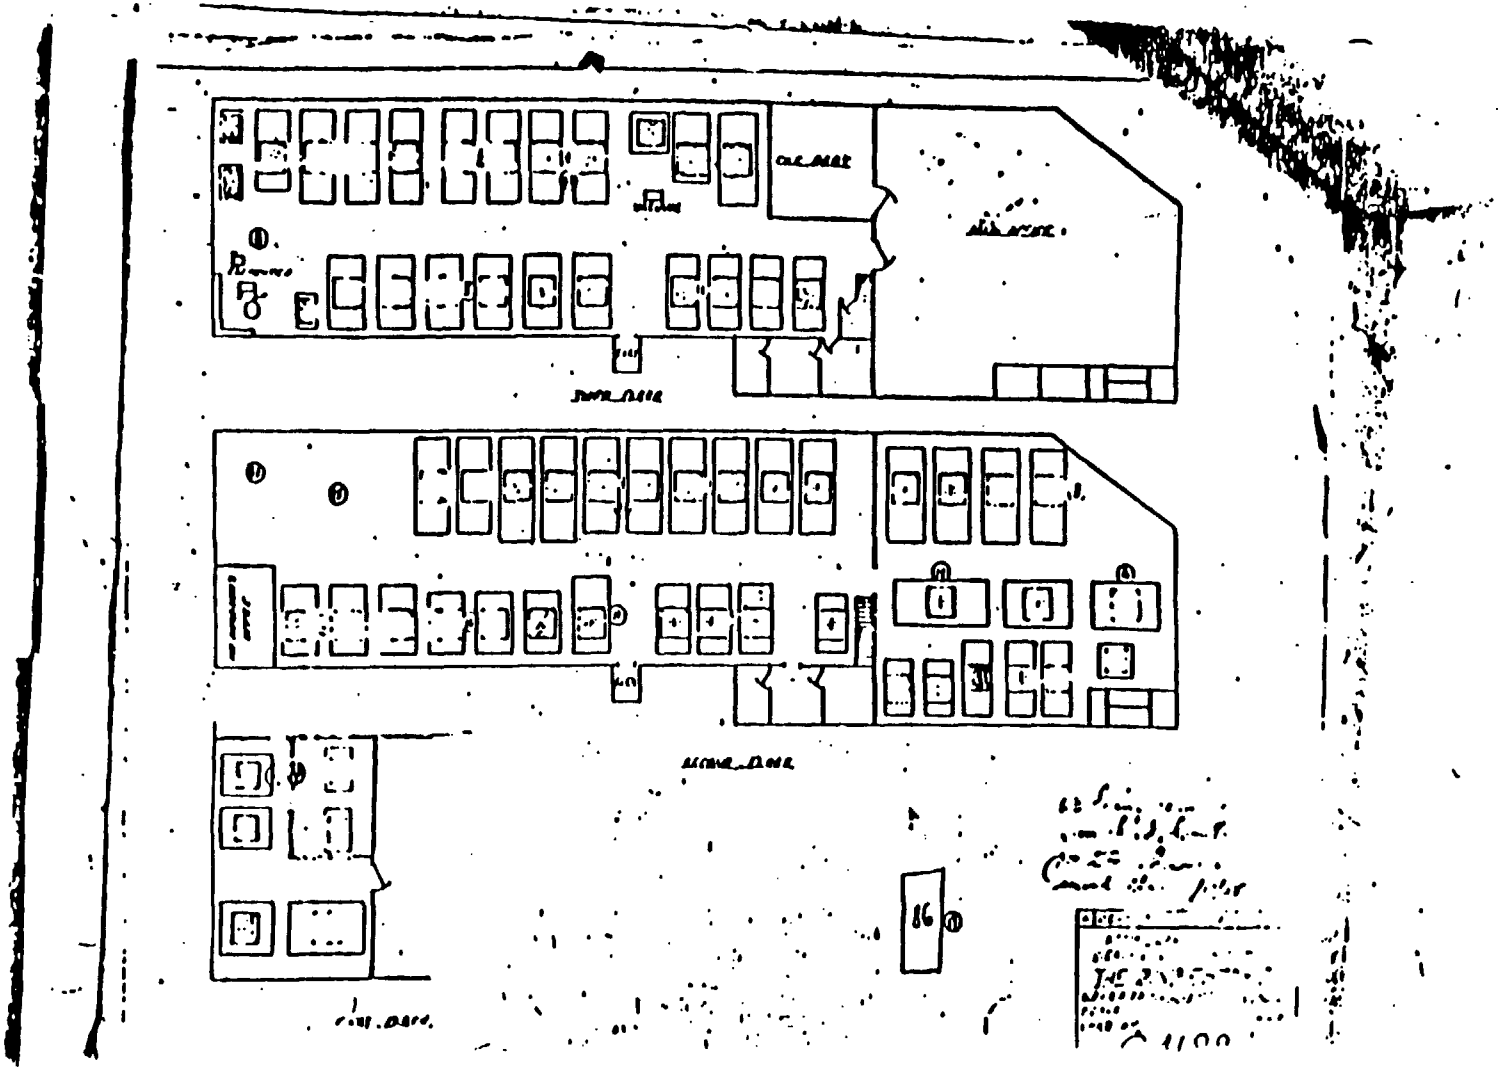

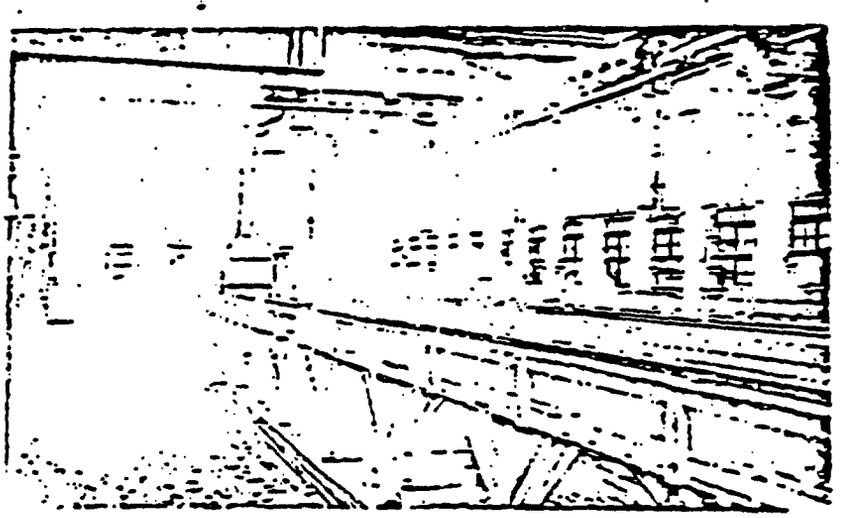

[illegible]

Dept. 6

Inserting rods in rubber tubing; exhaust system

The Manhattan-Rubber Mfg. Div.
of
Raybestos-Manhattan, Inc.

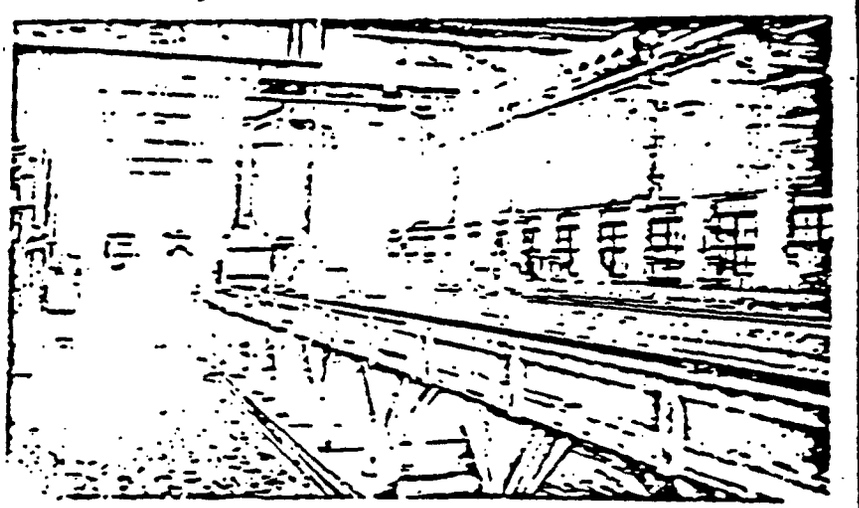

[illegible]

Dept. 6

Inserting rods in rubber tubing; exhaust system

The Manhattan-Rubber Mfg. Div.
of
Raybestos-Manhattan, Inc.