

Utility Fan Corporation

A Division of Utility Appliance Corp.
911 East 59th Street, Los Angeles 1, Calif.


Cable Address: UTILIFAN, Los Angeles.

Manufacturers of heavy and standard duty blowers for heating, air conditioning and ventilating installations. Producers of blowers and blower parts for original equipment manufacturers.


Built, tested and rated in accordance with ASHAE and NAFM codes.

Sizes 6 inches to 60 inches.


Write for catalog data.




Heavy duty blower, Type "B" backward curved DWDL.



Enclosed Drive Blower



Four-Way Blower



Silent Direct Drive Blower

HEAVY DUTY BLOWERS, Double Inlet Double Width and Single Inlet Single Width, Forward and Backward Curved Wheels. Wheel diameters range in size from 12 inches to 60 inches. These blowers are of Class I construction, in any of ten drive arrangements and eight discharge positions.

NEW ENCLOSED DRIVE BLOWERS, sizes 10 inches to 36 inches, with fully enclosed drive compartment. Ideal for roof installation. The ED blowers are of the forward curved slow speed type, built for ease of installation and a minimum of maintenance.

UTILITY'S FAMOUS "FOUR WAY" BLOWERS, designed by Utility, available in single width single inlet as well as double width double inlet. A simple change in bearing position makes it possible to obtain discharges in any of four directions. An economy unit for medium duty use, rigidly constructed and factory guaranteed.

NEW SILENT DIRECT DRIVE BLOWER. By using vibration-absorbing Neoprene in the basic hub design, the blower wheel is isolated from the motor shaft. This unique development produces a very quiet blower. The direct drive blower is available in three wheel sizes providing a varied range of capacities, depending on motor horsepower selected.



E. K. Campbell Company

Manchester at 18th Street, Kansas City 26, Missouri


Since 1910 Manufacturers of Heavy Duty Furnaces

Unit capacities up to 8,000,000 Btu per hour


District Offices: NEW YORK CITY, ST. LOUIS, MO., DENVER, COLO., KANSAS CITY, MO.
Representatives: MINNEAPOLIS, MINN., SALT LAKE CITY, UTAH, MEMPHIS, TENN.

"THERMIDAIRE" DESIGN 20 TYPE H-D FURNACE

Standard equipment for engineered application—available for installation in any position in capacities from 400,000 to 3,000,000 Btu per hour output—requires separate blower equipment—highly compact heavy duty furnace of high operating efficiency up to 84 percent—available in any fuel except coal—normally shipped assembled. Available for special air volumes if required.

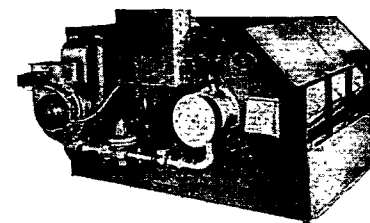

"Thermidaire" Design 20




"THERMIDAIRE" DESIGN 30 TYPE H-D FURNACE

Standard equipment, industrial type direct fired heater—available from 400,000 to 2,000,000 Btu per hour output—available in vertical, horizontal and inverted models—provides maximum compactness—available for single or multiple unit installations—equipped with burner, induced draft fan, and controls mounted and wired at the factory.

"Thermidaire" Design 30

"THERMIDAIRE" DESIGN 10 TYPE H-D FURNACE

Custom equipment for engineered applications—units from 400,000 to 8,000,000 Btu per hour output—any required duct-outlet arrangement—equipment component arrangements extremely flexible—balanced job design, blower and furnace sized separately—available in any fuel, oil fired model illustrated—large air volumes at low temperature rises up to 84 percent operating efficiencies—normally shipped K-D.

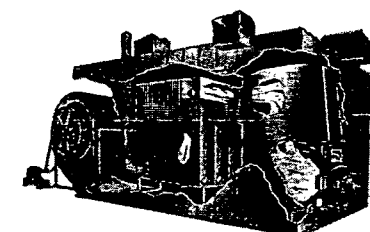

"Thermidaire" Design 10

"THERMIDAIRE" TYPE H-D FURNACES are all heavy-duty high-quality equipment—extra heavy, welded steel construction—induced draft fan on all models—baked enamel exterior finish—low internal resistance of flue gases—low static pressure-drop across equipment—permanently smoke and gas tight—true counterflow heat transfer—operating efficiencies up to 84 percent. Outstanding for schools, churches, auditoriums, factories, hangars, warehouses, etc.

For further information E. K. CAMPBELL COMPANY
Kansas City 26, Missouri