

V. 246, (247)

C.V.

D.V.

OG 04 CODE K0-786-D PKG.

DEC 22 33459

EST. WGT. 862 LBS.

STD. HRS. 10.5 TIME

01 YC-10-B 93 4 33063 550 # Bay 3/4
 01 YC-10-B 93 4 32901 1050 #
 01 YC-10-B 93 4 32903 1400 # YC-10-B, 33051, 1100

PROCESSES		APPROVED BY	
() K0-786-D	(P)	EWK-9-21-76	
()	()	DCG 9-21-76	
()	()	MTW 10-1-76	
()	()		
TYPED BY			
file 11-16-76			


Total Weight 4962# (Req.)

NON-BLEEDING


SHIPMENT	NAME: "KROLOR" ORANGE R	USE LBS.	N CODE	ACCT. LBS.
211	1 Run 60" (990 G) water in V-211 and add Assume 50%	30	7-D	15
&	2 Weigh in drum and pour in V-211	270	32-D	270
208	3 Dump in and stir 5 minutes LOT	82 x 50	YC-10-B	4100
1	Record: Start 3:30 A.M. 33063	550		
	Fin 3:41 A.M. 32901	1050		
	25" (1275 G) 32903	1400		
	4 Adjust to 80" (1370 G) 33051	1100		
	5 Pump V-211 thru Homog #2 at 1800-2200 psi into V-208			
	6 When V-211 MTY, wash color thru Homog at 1800-2200 psi using minimum water			
	7 Record: V-208 Vol 43 " and adjust to 50" (1840 G)			
	8 Inspect homog strainer and clean if necessary			
208	9 Run 15" (771 G) water into V-240 and start agitator and install temperature chart			
&	10 Pump V-208 thru Homog at 4800-5200 psi into SV			
SV	Record: Time Start 7:20 A.M. Total Minutes 125			
2	Note: If homog pressure falls below 4800 psi, 3-Way valve will recirculate slurry to V-208			
	11 When V-208 MTY, run in 5" (240 G) water and pump thru Homog at 4800-5200 psi			
349	12 While Homog, run 6" (284 G) water into V-349			
&	13 Run ±1000# water into V-384 and heat to 110-120°F			
384	14 Weigh into V-384 and pump to V-349	2400	32-D	2400
3	15 Run ±1000# water into V-384 and pump to V-349			
	16 Adjust V-349 to 22" (1040 G) & stir 15 minutes or longer			
	17 Record: Sp. 1.080 (10.9 ±0.2) 1.078-1.081			
	G/mL			
SV	18 When S 11 Homog complete, adjust to 66" (3400 G) in SV			
4	19 Record: pH 11.0 and adjust to 10.4-10.8 using N-7-D diluted to 5% (10 parts water to 1 part N-7-D) Assume 50%		7-D	
	Siphon N-7-D into SV and Record: pH			
	20 Heat to 190-194°F in 55-65 minutes & Record: HT 194 F and Rec 175 F			
	Note: Strike must be started immediately on completion of heating			
343	21 While heating SV, run 51" (1400 G) water into V-343			
&	22 Meter in from V-386 M 83 #/Gal 9.88 Gal 35.9		27-D	355
386	23 Stir 15 minutes or longer			
5	24 Record: Sp. 1.018 (2.8 ±0.1) 1.017-1.019			
	G/mL			

V-247

EQUIPMENT	PAGE	2	CG 04	CODE	K0-786-D (A)	EST. WGT.	4962	LBS.	USE	N	ACT.
									LBS.	CODE	LBS.
SV	25	When S 20 heating complete. Record: pH 9.9 (9.6-10.2)									
6	26	Set V-343 acid pump at 72 setting (±225 minutes)									
	27	Set V-349 silicate pump at 66 setting (±180 minutes)									
	28	Immediately meter in V-343 & V-349. Maintain SV at 190-193°F during strike									
	29	Record:	Start	Finish	Minutes						
			V-343	12:45	4:10 PM	235					
			V-349	12:45	3:20 PM	185					
		Record:	Time	V-343	V-349	SV	Normal				
				53 inches	22 inches	pH	pH				
		at 20 min	12:35	(47) +	(20)	9.75	9.3-10.0				
		40 min	12:55	(43) +	(17) +	9.8	9.3-10.0				
		1 hr	1:15 PM	(38) 39	(15)	9.8	9.3-10.0				
		2 hrs	2:15 PM	(24) 25 +	(7) 8 =	9.8	9.3-10.0				
		3 hrs	3:15 PM	(10) 1 +	(0) 0	9.7	9.3-10.0				
		Finish	4:00 PM	(0) 0	(0) 0	8.1	7.5-8.5				
		Note: if pH drops below 9.3 in 1st hour, stop pumps and see supervisor. If final pH is above 8.5, adjust to (7.5-8.5) and Record: pH Assume 77%									
								✓	27-D		
357	30	Run 21" (150 G) water into V-357 and heat to 135-140°F									
7	31	Dump in and stir to dissolve									
								300	15-A	300	
302	32	Add 42" (514 G) water to V-302									
8	33	Add and stir 2 minutes									
						Assume 50%		150	7-D	75	
SV	34	When V-349 MTY, rinse in with minimum water then set pump to zero setting									
9	35	When V-343 MTY, rinse in with minimum water, then turn off pump motor									
	36	TURN OFF STEAM									
	37	Run in V-357 from S 31 and stir 5 minutes									
	38	Record: pH 3.6 (3.3-3.7)									
	39	If necessary, adjust pH to 3.3-3.7 (Downward only) Record: pH 4.1									
	40	Run in N-7-D from S 33 in 4-6 minutes and stir 5 minutes									
	41	Record: pH 4.1 (4.0-4.2) & if necessary, adjust to pH 4.0-4.2 and Record: pH									
						Assume 77%			27-D		
						(Dilute 10 parts water to 1 part N-7-D) Assume 50%			7-D		
		Siphon N-7-D into SV									
	42	Stop agitator									
		START	FINISH	OPTR							
12-23	→	7:00 A	3:00 PM	235							
12-26	→	7:00 A	3:00 P	235							
	→	3: PM	5:30 PM	223							

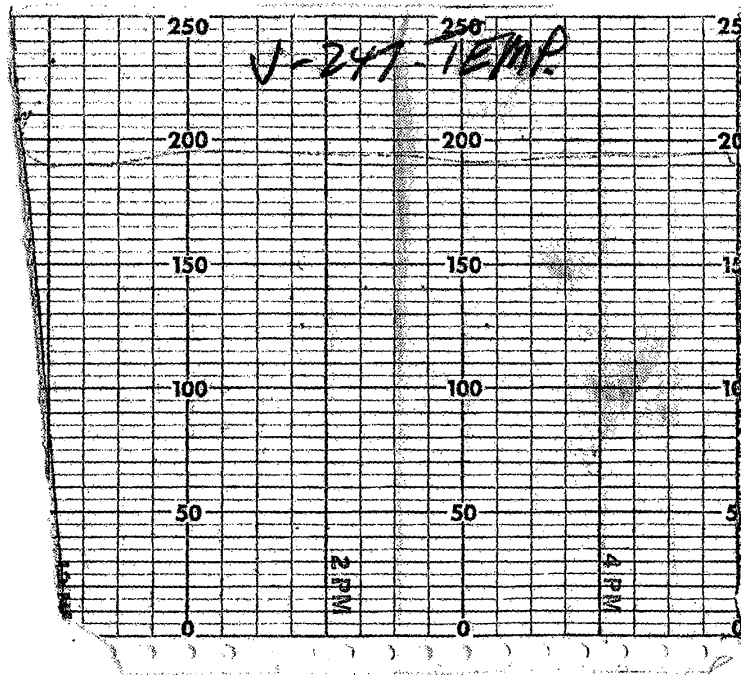

DUP050095457

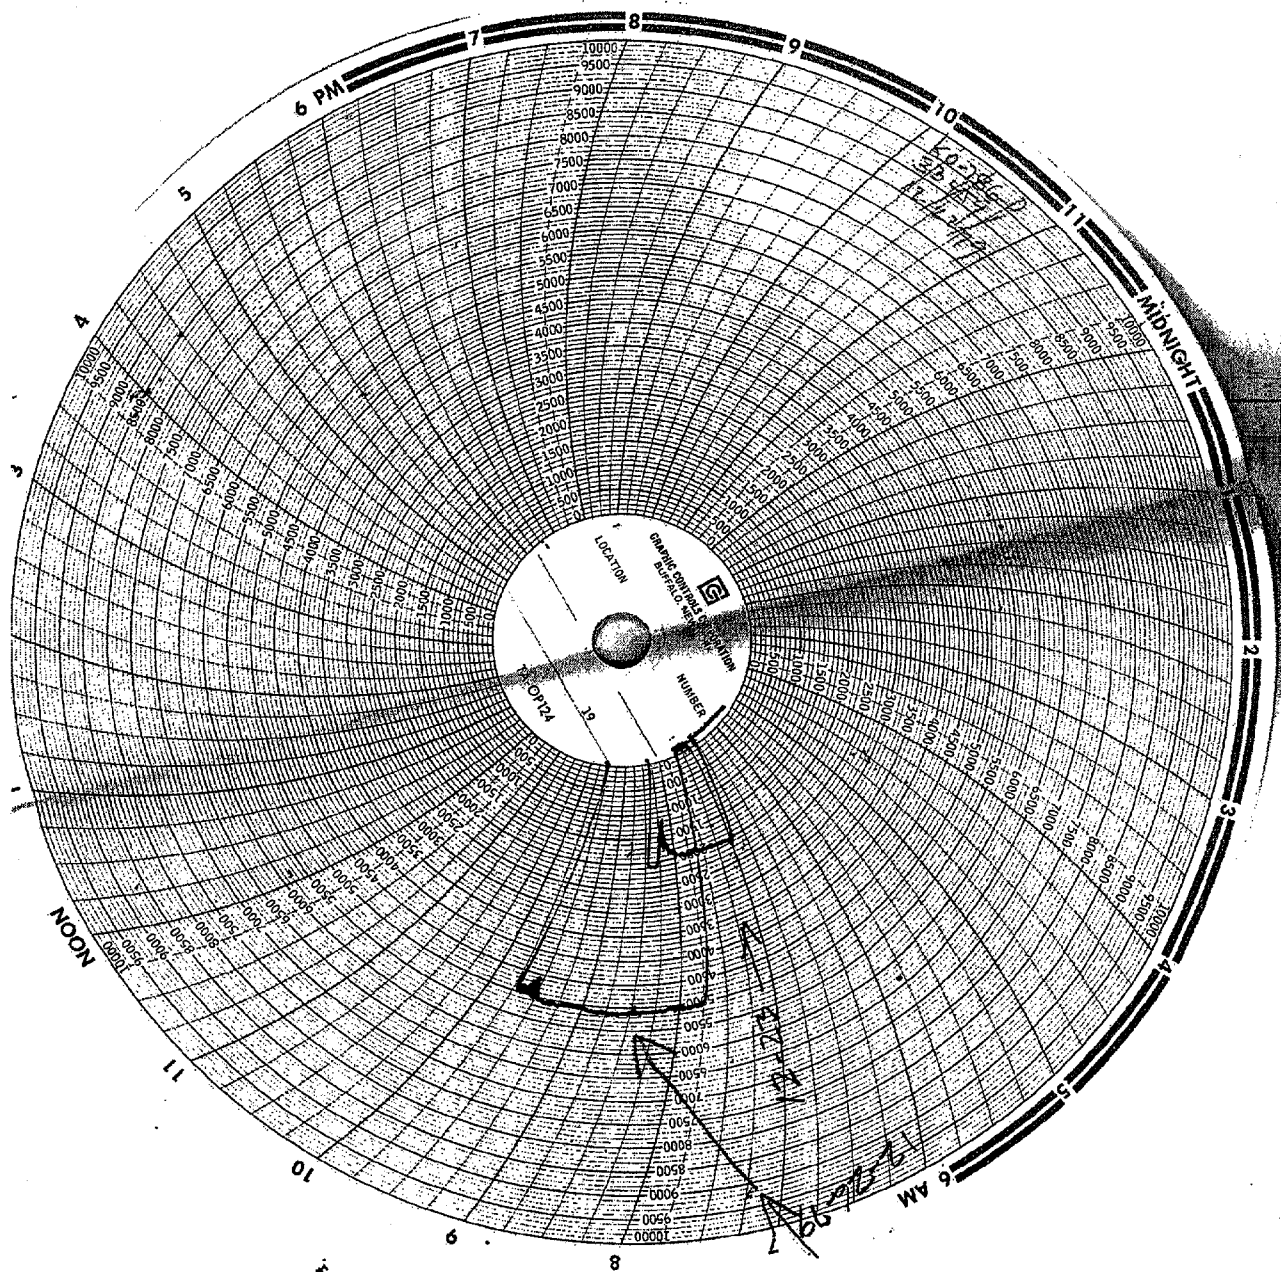



7-2247