


NEG. NO. K-2A

TRADEMARK FILE INFORMATION

Trademark:	Johns Manville JM
Trademark Owner:	Johns-Manville Corporation
Last Assignee:	None
Date of First Use	
in Commerce:	April 10, 1929
Registration No.:	566,486
Date Trademark	
Registered:	November 11, 1952
Size of Label in	
Trademark File:	8.5 x 7 inches

Receipt of Pictured Label by Patent Office: N/A

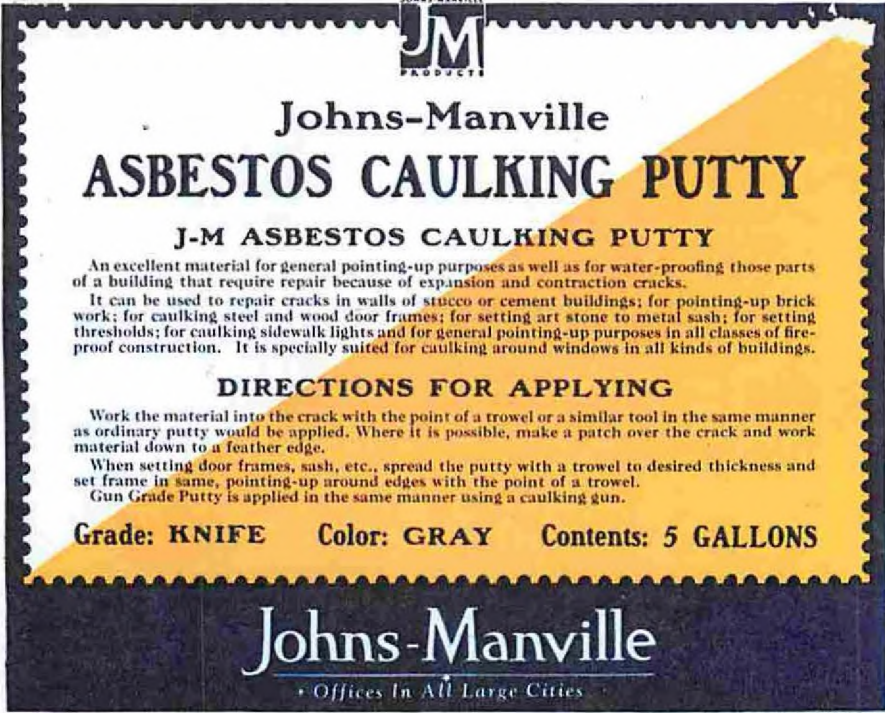

The label is rectangular with a decorative border. At the top center is the Johns-Manville logo, consisting of the letters 'JM' inside a square with 'JOHNS-MANVILLE' above and 'PRODUCTS' below. Below the logo, the text 'Johns-Manville' is written in a serif font, followed by 'ASBESTOS CAULKING PUTTY' in a larger, bold, sans-serif font. Underneath this is 'J-M ASBESTOS CAULKING PUTTY' in a smaller, bold, sans-serif font. The main body of the label contains two paragraphs of text describing the product's uses and a section titled 'DIRECTIONS FOR APPLYING' with three bullet points. At the bottom of the main body, the text 'Grade: KNIFE Color: GRAY Contents: 5 GALLONS' is printed. The bottom of the label features the 'Johns-Manville' logo again, with '• Offices In All Large Cities •' below it. The entire label is set against a background that is white on the left and yellow on the right, separated by a diagonal line.

Johns-Manville
ASBESTOS CAULKING PUTTY
J-M ASBESTOS CAULKING PUTTY

An excellent material for general pointing-up purposes as well as for water-proofing those parts of a building that require repair because of expansion and contraction cracks.

It can be used to repair cracks in walls of stucco or cement buildings; for pointing-up brick work; for caulking steel and wood door frames; for setting art stone to metal sash; for setting thresholds; for caulking sidewalk lights and for general pointing-up purposes in all classes of fire-proof construction. It is specially suited for caulking around windows in all kinds of buildings.

DIRECTIONS FOR APPLYING

Work the material into the crack with the point of a trowel or a similar tool in the same manner as ordinary putty would be applied. Where it is possible, make a patch over the crack and work material down to a feather edge.

When setting door frames, sash, etc., spread the putty with a trowel to desired thickness and set frame in same, pointing-up around edges with the point of a trowel.

Gun Grade Putty is applied in the same manner using a caulking gun.

Grade: KNIFE Color: GRAY Contents: 5 GALLONS

Johns-Manville
• Offices In All Large Cities •