


Portable Air Compressor

PLAINTIFF'S EXHIBIT


GP-1947

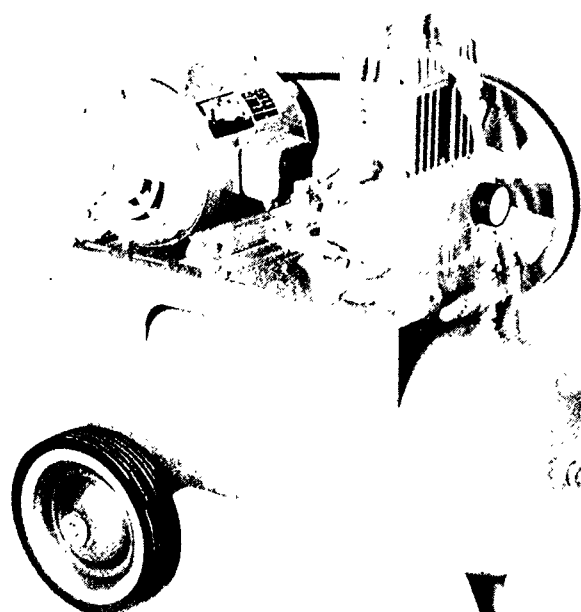

MODEL CC-1 1/2



★ MODEL CB-3 ►

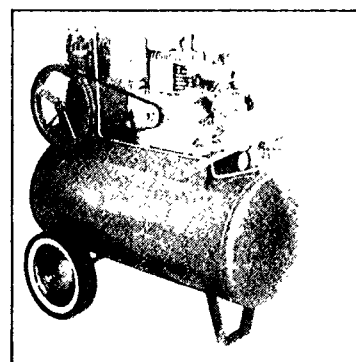

SPECIFICATIONS

SGP 0025388

TANK – Hydrostatically and safety tested to 400 PSI. Actual rupture point 900 PSI. Automatic machine welded.

PRESSURE UNLOADER – Automatic. Constant speed.

SAFETY RELIEF VALVE.

WHEELS – 10 x 2.75 wheels with puncture proof tires, flat tread and tapered sides.

SHUT OFF VALVE.

GAUGE – Heavy duty pressure gauge, 200 lb.

FINISH – Attractively painted bright blue; compressor head, wheels and guard white. ★

HANDLE – Heavy removable handle.

MOTOR – Heavy duty Newman motor, capacitor start, ball bearing, thermo overload.

PUMP – Ball bearing twin cylinder. Sizes available from 6.2 to 10.8 CFM. Honed cylinder for maximum efficiency. Every item run-in at factory. Balanced precision made internal parts for smooth quiet operation. Filtered air intake. Stainless steel valves. Positive splash lubrication. Three ring piston for long trouble free life. Dip stick oil check.

MODEL	H. P.	CYLINDERS	PRESSURE RANGE	CFM	RPM	TANK SIZE GAL.	SHIPPING WEIGHT	PRICE
CB-1	1 ELECTRIC	2	90-100	6.6	900	22	216	224.93
CB-1 1/2	1 1/2 ELECTRIC	2	90-100	8.8	950	22	225	247.43
CB-3 ★	3 GAS	2	90-100	8.8	850	22	160	209.93

EXTRA HEAVY DUTY COMPRESSOR

WITH AUTOMATIC TYPE PRESSURE OIL LUBRICATION FOR EXTREMELY ROUGH SERVICE.

CC-1 1/2	1 1/2 ELECTRIC	2	100-110	9.2	810	22	240	\$330.00
CC-5	5 GAS	2	100-110	11.3	1000	22	200	\$310.00

HACKEL BROS., INC. 8519 W. KAUL AVE. MILWAUKEE, WIS.

HACKEL BROS.

Portable Heavy Duty Gas Air Compressors

Designed for Contractors' Use.

Engines are 25% to 40% larger than normally furnished on same size air compressors for:

50% More Engine Life.

Easier Starting under extreme weather conditions.

More than Ample Power Reserve.

AIR COMPRESSORS have Timken bearings, LYNITE rods. Valves and seats are hardened for long service; enclosed crankcase with a vane type oil pump; intake filter and muffler. Also equipped with variable unloader to provide control for constant speed operation. Unloader is adjustable.

AIR RECEIVERS are ASME, with safety valve, moisture drain valve, pressure gauge and shut off valves. Unloader air line is equipped with cushioned ends to eliminate vibration breakage.

HEAVY DUTY MOUNTINGS for engine, compressor and air receiver are on a one-piece base.

ENGINE SLIDE adjustment for belt wear.

FOUR WHEEL TRUCK models are mounted on zero pressure tires and may be towed by one man down corridors and transported on elevator.

TRAILER MODELS are furnished in all sizes and have automotive type wheels and tires; hitch is **adjustable up and down depending on height of vehicle hitches. Trailer mounted compressors can be towed at high speeds, have good stability.

Models are:

H. P.	SKID MODEL	RUBBER WHEELED* WAGON MODEL	TRAILER * MODEL	PISTON DISP. C F M	OPERATING PRESS
GAS 12.5	2-50	2-51	2-52	38	90-110
GAS 18	2-53	2-54	2-55	48	90-110
GAS 25	2-56	Not available	2-58	58	90-110

*Equipped with electric starter, generator, battery and distributor ignition; all others with starter only and magnetic ignition. All units available either way.

All skid models are furnished with magneto ignition and 12 volt electric starting.

All units available with electric motors, price on application.

Adjustable Height Hitch**

MODEL 2-52

MODEL 2-51

SGP 0025389

MODEL 2-50

BULLETIN A-2

HACKEL BROS. INC. 8519 W. KAUL AVE. MILWAUKEE, WIS.