

Registered


Lowe Brothers
REG. U.S. PAT. OFF. **HIGH**
STANDARD
HOUSE PAINT

WHITE 328

U.S. STANDARD GALLON

6000 SUP

01811

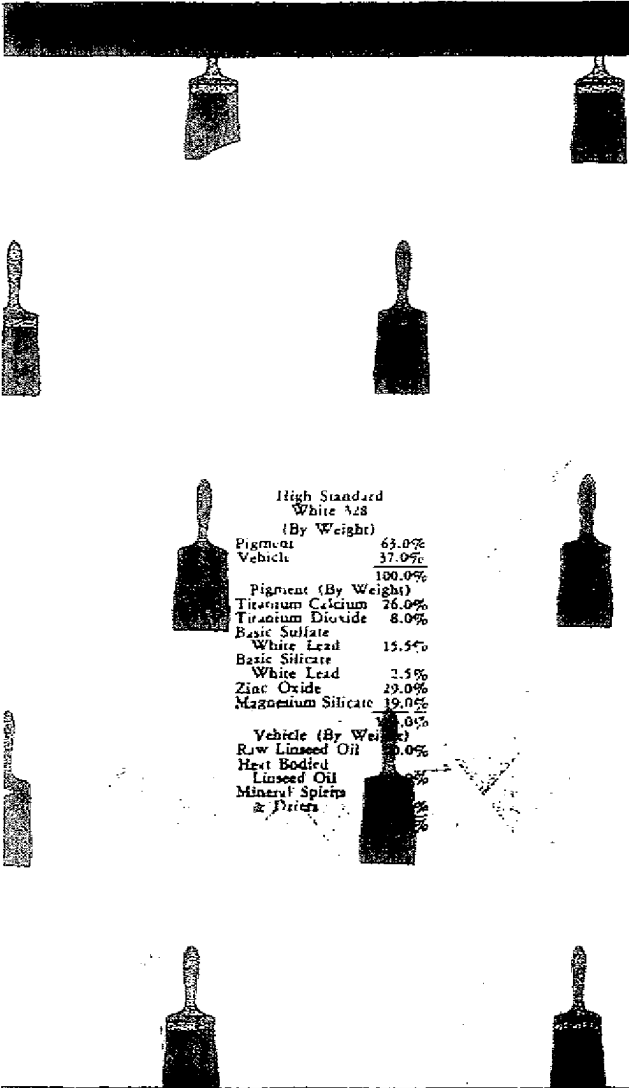

High Standard
White 348
(By Weight)

Pigment	63.0%
Vehicle	37.0%
100.0%	
Pigment (By Weight)	
Titanium Calcium	26.0%
Titanium Dioxide	8.0%
Basic Sulfate	
White Lead	15.5%
Basic Silicate	
White Lead	2.5%
Zinc Oxide	29.0%
Magnesium Silicate	19.0%
100.0%	
Vehicle (By Weight)	
Raw Linseed Oil	50.0%
Heat Bodied	
Linseed Oil	
Mineral Spirits	
& Driers	

FOR EXTERIOR OR INTERIOR WORK

DIRECTIONS—The surface must be dry and clean. Remove loose paint. Putty nail holes after priming. Do not paint in damp, foggy weather. Allow two days, and not more than ten days, between coats for drying.

MIXING—Pour off liquid into another vessel; stir remaining paint to uniform consistency; return liquid gradually, stirring well, to the additions.

IMPORTANT NOTES—This product is to be used as a WHITE. DO NOT TINT. For special colors, use High Standard House Paint Tinting White 348 shaded with Lowe Brothers Tinting Colors in Oil.

UNDERCOATS—For the priming coat on NEW WORK use Standard Primer WITHOUT THINNING or High Standard House Paint thinned by the addition of one quart to one-half gallon of oil to each gallon of High Standard House Paint, depending on condition of the surface. For the first coat in REPAINTING use Standard Primer WITHOUT THINNING, or High Standard House Paint which has been thinned by the addition of one or two quarts of linseed oil to each gallon of paint; on porous surfaces a greater quantity of linseed oil should be added.

FINISHING COAT—Use High Standard House Paint as it comes from the can.

THE LOWE BROTHERS COMPANY
DAYTON FACTORIES TORONTO

MADE IN U. S. A.