
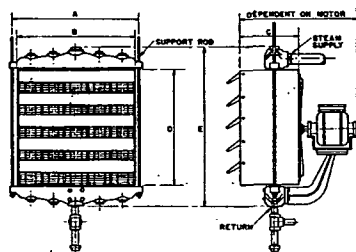


D. J. Murray Mfg. Co.

Wausau, Wisconsin

Offices in Principal Cities

MANUFACTURERS OF THE GRID UNIT

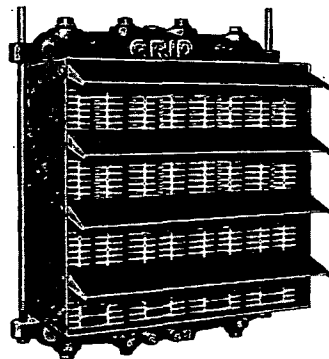

Overall dimensions for installation of Cast Iron
GRID Unit Heater

Now made of high test cast iron instead of aluminum heating sections, to cooperate with the war effort in conservation of vital materials. Patent applied for.

Designed and tested to operate with steam or hot water systems—for steam pressures from 2 lbs to 250 lbs. Engineered along the same lines as the standard GRID Unit which had aluminum heating sections and has been on the market since 1929.

CI (CAST IRON) SERIES' GRID UNIT HEATER DATA

Model No.	Dimensions					Motor		Vol. Fan	Capacities 5 lb Steam 60° Air		Approx. Shipping Weight	Pipe Sizes	
	A	B	C	D	E	Hp	Rpm		Btu/Hr	Final TMP		Supply	Ret.
CI 1500	17 1/2	15 1/4	11 1/2	16	23 3/4	1/10	1750	1500	76500	107	275	1 1/2"	1 1/4"
CI 2000	22 1/4	21 3/4	11 1/2	21 1/4	28 3/4	1/6	1150	2600	143000	110	440	2"	1 1/4"
CI 2504	27 1/2	26	13	26	35 1/4	1/4	1150	3300	206000	117	660	2 1/2"	1 1/4"
CI 2500	27 1/2	26	13	26	35 1/4	1/2	1150	4350	224000	107	675	2 1/2"	1 1/4"
CI 3000	32 3/4	31 1/8	13	31 1/8	39 1/8	1/2	850	6300	332000	108	1050	2 1/2"	1 1/4"
CI 3000	32 3/4	31 1/8	13	31 1/8	39 1/8	1 1/2	1150	8000	380000	103	1050	2 1/2"	1 1/4"

*Furnished also with 2 in. top supply connection inlet.

NO ELECTROLYSIS TO CAUSE CORROSION

Low maintenance expense.
More air changes per hour.
Positive "directed" heat.
No leaks—no breakdowns.

Lower outlet temperature.
Larger air volume.
No soldered, brazed or expanded joints.
Open design that keeps units clean.

Send for complete catalog information

John J. Nesbitt, Inc.

Holmesburg, Philadelphia, Pa.

11 Park Place, New York City 205 W. Wacker Drive, Chicago, Ill.

Manufacturers of


THE NESBITT SYNCRETIZER Heating and Ventilating Unit,
sold by John J. Nesbitt, Inc., and American Blower Corporation;
NESBITT HEATING SURFACE with Dual Steam-distributing Tubes,
NESBITT SERIES H HEATING SURFACE, and
NESBITT SERIES W COOLING SURFACE,

sold by leading manufacturers of fan-system apparatus;

WEBSTER-NESBITT UNIT HEATERS and AIR CONDITIONERS

(See page 1039), distributed in U. S. A. by Warren Webster & Company.

All products listed are now available with all-steel coils.

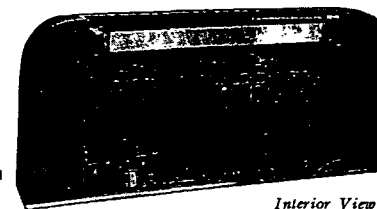

Interior View

NESBITT SYNCRETIZER—Series 400

The last word in heating and ventilating units for schoolrooms, offices, etc., where the continuous introduction of outdoor air is desired. For engineering data, get Publication No. 225-1; for "The Story of Syncretized Air," Publication No. 231-1.

The Nesbitt Syncretizer is available with non-metallic casing. Complete details will be supplied on request.


Nesbitt Series B Thermovent

For heating and ventilating auditoriums, gymnasiums, assembly halls, and similar gathering places. Publication No. 227-1.


NESBITT COOLING SURFACE

Series W (Water)
Surface with exclusive drain feature

For air cooling and cooling and dehumidifying (with cold water) or air heating (with hot water). Constructed of copper tubes and plate-type aluminum fins. Available in either continuous or cleanable tube type, in single sections having one to eight rows of tubes deep, in three fin spacings, in eleven fin widths, and up to sixteen finned tube lengths. Sturdy galvanized casings. For particulars and engineering data send for Publications No. 233 and 233-1.



Uncased Surface
Showing Drain Header



NESBITT HEATING SURFACES

With Dual Steam-distributing Tubes

Copper tube-and-fin surface for low-pressure applications. Perfectly adapted to close, continuous automatic control with modulating steam valves. Steam-distributing tubes within the condensing tubes carry the steam equally to the full section assuring UNIFORM discharge, temperatures even under a throttled steam supply; eliminating temperature stratification; preventing tube freezing without preheaters; giving ideal system results.

Cased or uncased units of many sizes and capacities. For full particulars and engineering data, send for Publication No. 237.

For above advantages plus uniform distribution in extended fin lengths from 80 to 128 ins., specify Nesbitt Duplex Heating Surface with Dual Steam-distributing Tubes. Publication No. 237.



Nesbitt Series H Heating Surface

A lightweight, enduring, highly efficient blast-coil heating surface designed for use with steam pressures up to 200 lb gauge. Well suited to high-pressure as well as low-pressure applications. Seven types, each in eight fin widths and up to sixteen finned lengths—a total of 784 sizes from which to select. Send for Publication No. 238 for complete engineering data.