BULLETIN NO. PCE-010 DATE 4/81

**VW DIESEL CYLINDER HEAD GASKET**

# VW DIESEL CYLINDER HEAD GASKET

In order to compensate for manufacturing tolerances on the **Rabbit Diesel Engine,** VW uses four different thicknesses of head gaskets. The different gaskets are identified by grooves cut into a tab on the side of the gasket as shown below. Be sure to order the same gasket as the one you removed.

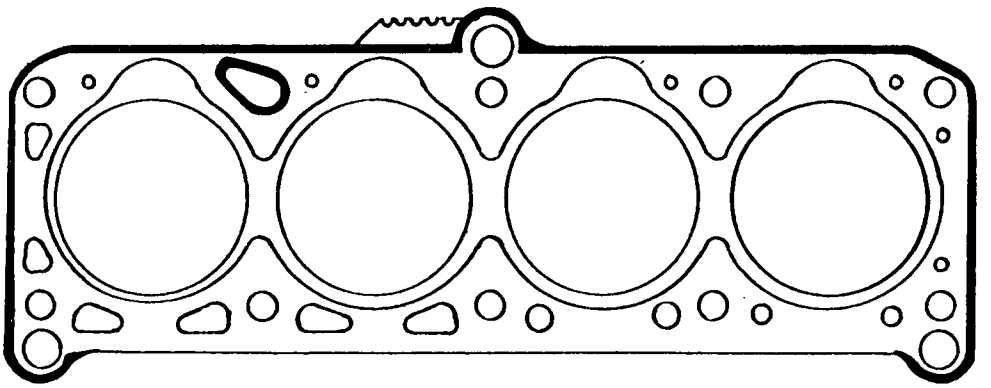

| | | | | |
|---|---|---|---|---|
| 2 Grooves | — | 1:30 mm | — | Victor Part no. 3666 |
| 3 Grooves | — | 1:45 mm | — | " " " 3664 |
| 4 Grooves | — | 1:50 mm | — | " " " 3669 |
| 5 Grooves | — | 1:60 mm | — | " " " 3665 |

The replacement gaskets are coated with a wax sealant and packaged in an airtight poly bag. The gasket "cures" after installation, so leave it in the bag until you are ready to install it. No additional sealers should be used. Be sure to torque the head bolts to OEM specifications.