


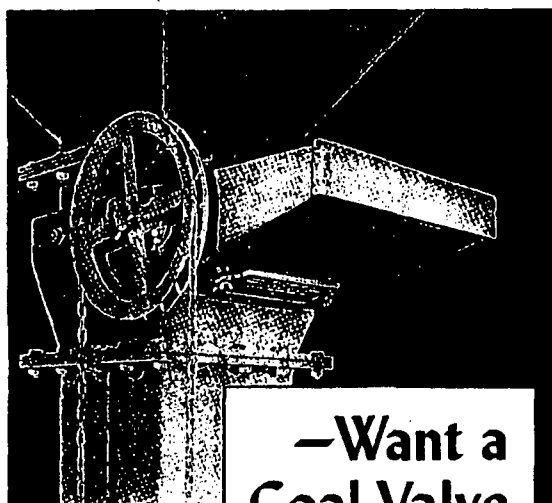

**—Want a
Coal Valve
to CLOSE?**

S. E. Co. COAL VALVES WILL!

S. E. Co. Coal Valves are equipped with *two* driving racks and pinions! The effect gained by this construction is to keep the gate in a S. E. Co. Coal Valve in perfect alignment and free-moving at all times. Furthermore, all working parts are completely shielded to keep coal particles and moisture from causing deterioration and binding.


Write for illustrated bulletins and data sheets.
Address **STOCK ENGINEERING COMPANY,**
715 Hanna Bldg., Cleveland 15, Ohio.



CONICAL
Non-Segregating
Coal Distributors


S. E. CO.
Coal Valves and Coal Scales

construction and has safety handle that bends on overloads. When taken apart, hoist jack is sufficiently compact to be carried in tool box. It is for all-round duty and plant use for lifting or pulling work. Coffin Hoist Co., Danville, Ill.



Flexible Couplings

PIN-TYPE FLEXIBLE COUPLINGS have tapered lock bushing previously used with V-belt sheaves. Bushing insures fastening coupling to shafts with shrink-fit tightness and eliminates rebaring. Coupling center disk of oak-tanned sole leather provides flexibility and strength. It has no projecting parts. Center disk can be easily removed by loosening coupling flanges and sliding them apart on their shafts. Large-diameter centerless ground pins pressed in flanges are easily removed. Coupling insures all over to insure balance and true running. Dodge Mfg Co., Milwaukee, Ind.

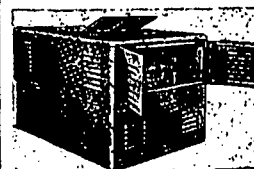


Hydraulic-Power Units

CUSTOM-BUILT HYDRAULIC POWER UNITS are for special requirements of industrial machinery. Units include all necessary valves, pumps, oil reservoirs, intermediate piping, motors and air cleaners in a single casing. Hydraulic connections to the driven machine are grouped in a conveniently located manifold for simplicity of installation and maintenance. Vickers, Inc., 1596 Oakman Blvd., Detroit, Mich.

Electric Hoist

RUGGED construction, low-operating cost features new line of *Whipper* electric hoists. Capacities range from 250 to 2000 lb., with cross or parallel-mounted trolleys. Standard lift is 12 ft., but 20 ft. can be furnished. Hoist has pushbutton control, preformed wire rope, grooved drum, motors that meet NEMA standards. Ford Chain Block Div., American Chain & Cable Co., York, Pa.

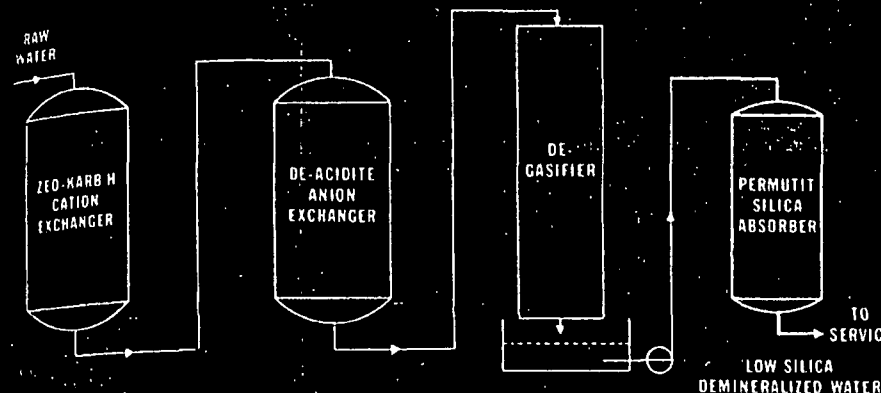

SILICA REMOVAL *combined with* **DEMINERALIZATION!**

**HERE'S AN ECONOMICAL NEW CHEMICAL PROCESS
FOR PRODUCING THE EQUIVALENT OF DISTILLED WATER!**

The Permutit* two-step Demineralizing process utilizes Zeo-Karb H, Permutit's acid-regenerated cation exchanger to replace metallic cations with hydrogen ions, converting salts present into corresponding acids. These acids are then removed from solution by De-Acidite, Permutit's resinous anion exchanger.

Permutit has pioneered by adding to the Demineralizing process a new, one-step cold process silica

removal treatment which removes silica down to less than 0.5 p.p.m.—making possible ideal, low silica, demineralized boiler-feed make up!

For information about this revolutionary new, low first cost, low operating cost treatment, address The Permutit Company, Dept. P-1, 330 West 42nd Street, New York 18, N. Y., or the Permutit Company of Canada, Ltd., Montreal.

*Trade Mark Reg. U. S. Pat. Off.

for 34 years
Permutit
WATER CONDITIONING HEADQUARTERS

WATER CONDITIONING • ION EXCHANGERS • MATERIALS AND EQUIPMENT