

SWITCHBOARDS


Service Sections

Type FSN, HFSN, OSN and CBN—with Provision for WHM Metering and
Current Transformer


For ordering instructions, see page 63.



Type FSN

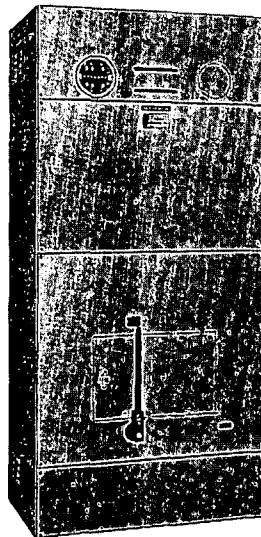

Type HFSN

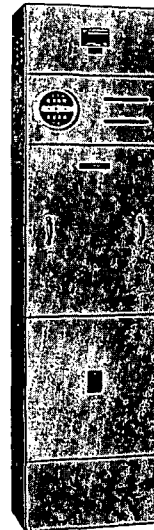

Type CBN—200-800 Amp.



Type CBN—600-1600 Amp.

TYPE FSN

System	Ampere Rating	Catalog Number	Price ①	Dimensions in Inches			Ship. Wt. Lbs.
				Wide	High	Deep	
WITH FUSIBLE MAIN DISCONNECT							
3 Wire S/N (2 Blades, 2 Fuses) 120/240 V. A-c 240 V. A-c	200	FSN-222	\$308.	24	90	15	290
	400	224	380.	24	90	15	310
	600	226	486.	24	90	15	350
	800	228	918.	24	90	15	380
	1200	2212	1188.	32	90	15	400
3 Pole 240 V. A-c	200	322	356.	24	90	15	300
	400	324	428.	24	90	15	324
	600	326	594.	24	90	15	370
	800	328	972.	24	90	15	400
	1200	3212	1404.	32	90	15	440
3 Pole 480 V. A-c	200	352	390.	24	90	15	300
	400	354	452.	24	90	15	330
	600	356	654.	24	90	15	370
4 Wire S/N (3 Blades, 3 Fuses) 120/208 V. A-c 240 V. A-c	200	422	390.	32	90	15	310
	400	424	476.	32	90	15	340
	600	426	666.	32	90	15	380
	800	428	1188.	32	90	15	410
	1200	4212	1544.	42	90	15	450
4 Wire S/N (3 Blades, 3 Fuses) 277/480 V. A-c	200	452	424.	32	90	15	320
	400	454	500.	32	90	15	350
	600	456	736.	32	90	15	390

TYPE HFSN

System	Ampere Rating	Catalog Number	Price ①	Dimensions in Inches			Ship. Wt. Lbs.
				Wide	High	Deep	
WITH HIGH CAPACITY FUSIBLE MAIN DISCONNECT AND WITH PROVISIONS FOR CURRENT LIMITING TYPE FUSES							
3 Wire S/N (2 Blades, 2 Fuses) 120/240 V. A-c 240 V. A-c	1200	HFSN-2212	\$2050.	42	90	25	1500
	1600	2216	2380.	42	90	25	1600
	2000	2220	2730.	42	90	25	1700
	② 2500	2225	3920.	60	90	25	1900
	② 3000	2230	4680.	60	90	25	2200
	② 4000	2240	5890.	60	90	29	2600
3 Pole 240 V. A-c	1200	3212	2470.	42	90	25	1600
	1600	3216	2830.	42	90	25	1700
	2000	3220	3250.	42	90	25	1800
	② 2500	3225	4550.	60	90	25	2000
	② 3000	3230	5520.	60	90	25	2300
	② 4000	3240	7160.	60	90	29	2700
3 Pole 480 V. A-c 600 V. A-c	1200	3512	3050.	42	90	25	1900
	1600	3516	3370.	42	90	25	2000
	2000	3520	3750.	42	90	25	2100
	② 3000	3530	6910.	60	90	29	2600
	② 4000	3540	9240.	66	90	35	3000
	4 Wire S/N (3 Blades, 3 Fuses) 120/208 V. A-c 120/240 V. A-c (Delta)	1200	4212	2620.	42	90	25
1600		4216	3000.	42	90	25	1800
2000		4220	3450.	42	90	25	1900
② 2500		4225	4680.	60	90	25	2100
② 3000		4230	5670.	60	90	25	2400
② 4000		4240	7360.	60	90	29	2900
4 Wire S/N (3 Blades, 3 Fuses) 277/480 V. A-c	1200	4512	3200.	42	90	25	2000
	1600	4516	3540.	42	90	25	2100
	2000	4520	3970.	42	90	25	2200
	② 3000	4530	7060.	60	90	29	2700
	② 4000	4540	9440.	66	90	35	3200

① Price does not include fuses.

② Deduct \$150. from list price and 13" from width dimension if WHM meter mounting provision or space is not required.
Dimensions and weights, approximate.

MODIFICATIONS AND ACCESSORIES, page 73.

DISCOUNT SCHEDULE 23 CD

CUTLER-HAMMER