


XX 98

Location.....Borough.....Date.....
Name.....Case No.....
To:.....From:.....
Subject:.....

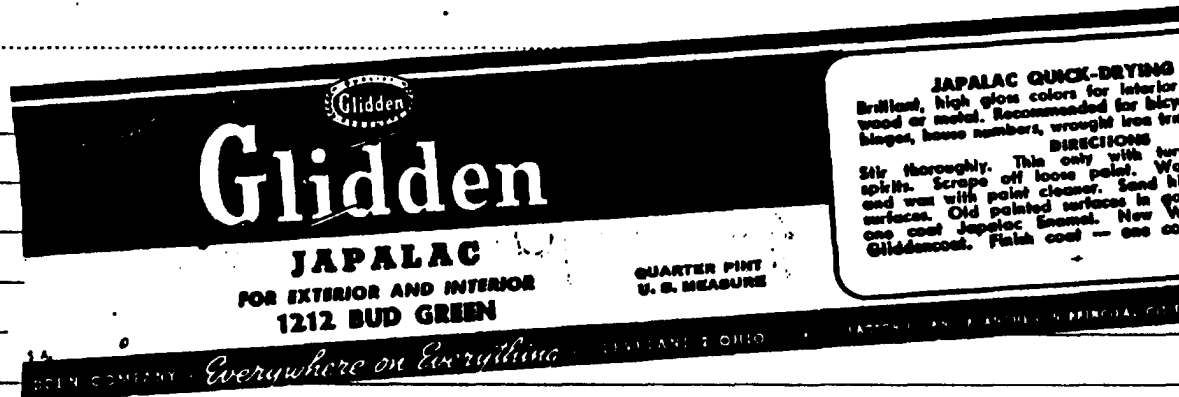

4.5⁹⁰

121 Liberty

XX/65

Location.....

Borough.....

Date.....

Name.....

Case No.....

To:.....

Subject:.....

Glidden

JAPALAC
FOR EXTERIOR AND INTERIOR
1212 BUD GREEN

QUARTER PINT
U. S. MEASURE

TANT: *Examination on Everything* CLEVELAND OHIO

JAPALAC QUICK-DRYING ENAMEL
For interior or exterior glass, enameled on wood or metal surfaces.
Dries in 4 to 6 hours. DIRECTIONS — Stir enamel thoroughly. If necessary, use turpentine or mineral spirits sparingly. PREVIOUSLY PAINTED SURFACES. Remove loose paint and smooth rough spots by sanding. Wipe with mild soap and water, then wash and let dry. Then apply one or two coats of JAPALAC UNPAINTED SURFACES. Mix with QUADROCOAT ENAMEL UNDERCOAT. In dry and follow with one or two coats of JAPALAC. Seal lightly between coats. L. C. 1-7-42

4.807-4.610

1286 (12/69)

SPECIAL REPORT