

**ENAMELOID
WILLOW GREEN**

Contents of Can:
 Pigment by weight..... 24%
 Liquid by weight..... 76%
 The Liquid is Varnish..... 100%
 Composition of Pigment:
 *Color..... 71%
 Magnesium Silicate..... 29%
 *Coloring Material:
 Chrome 100% Lead Chromate
 Yellow 100% Lead Sulphate
 Bone 100% Animal Carbon
 Black 50% Calcium Phosphate
 & Carbonate.

R727




DIRECTIONS—Stir thoroughly from bottom of can. Be sure that the surface is dry and free from grease and dirt. Apply in full, even coats with a soft bristle brush. If necessary, thin with a little pure spirits of turpentine only. Allow 24 hours between coats. **MADE IN U.S.A.**

ENAMELOID, PRIMROSE

Contents of Can:
 Pigment by weight..... 46%
 Liquid by weight..... 54%
 The Liquid is Varnish..... 100%
 The Pigment is Zinc Oxide
 tinted with Chrome Yellow.

R728

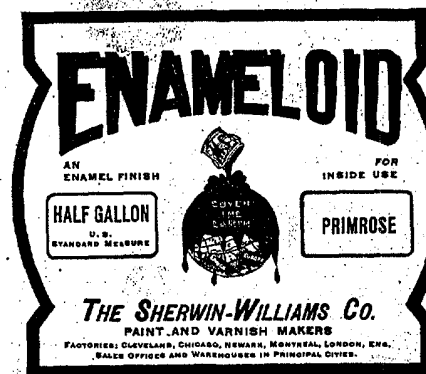

DIRECTIONS—Stir thoroughly from bottom of can. Be sure that the surface is dry and free from grease and dirt. Apply in full, even coats with a soft bristle brush. If necessary, thin with a little pure spirits of turpentine only. Allow 24 hours between coats. **MADE IN U.S.A.**

DIRECTIONS—Stir thoroughly from bottom of can. Be sure that the surface is dry and free from grease and dirt. Apply in full, even coats with a soft bristle brush. If necessary, thin with a little pure spirits of turpentine only. Allow 24 hours between coats.