obsolete
file copy

PYDRAUL®

FIRE-RESISTANT HYDRAULIC FLUID

SELECTOR



TOWOLDMON0027692
WATER_PCB-00012161

PYDRAUL
SELECTOR

0237488

TOWOLDMON0027693
WATER_PCB-00012162

THE PYDRAUL SELECTOR

. . . is designed to put literally at your fingertips all the facts about Pydraul fire-resistant hydraulic fluids—to guide you quickly to the Pydraul fluid that will serve your operation best.

Protection from fire for hydraulic operations began with Pydraul. That was in 1951. Pydraul fluids have since served industry with over one billion machine hours of fire-free operation. Never during these billion hours of machine operations has a Pydraul fluid contributed to a fire—not even when sprayed from the broken ends of high pressure hydraulic lines onto white-hot surfaces.

New ways are continuously being explored to improve the excellent performance records of Pydraul fluids. The first Pydraul fluid, general-purpose Pydraul F-9, has grown to a family of six, specially tailored, fire-resistant hydraulic fluids and lubricants. Each answers a major but specific hydraulic fluid need for industrial use. In addition to guarding against fire, each Pydraul fluid lubricates as well as premium grade oil. Pydraul fluids have answered the need of virtually every industrial hydraulic operation, indoors and out—from the sub-zero, outdoor hydraulic lift operations for refineries and blast furnaces to the low-viscosity fluid demands of high-speed, precision machine tools.

0237489

TOWOLDMON0027694
WATER_PCB-00012163

PYDRAUL PERFORMANCE

The six fire-resistant, premium-lubricating Pydraul fluids offer a wide range of viscosities from which you can select the proper level specified by your hydraulic equipment manufacturer. Whichever Pydraul fluid you select, each provides the same protection against fire, premium lubricity, ease of maintenance, and freedom from corrosive action and foam. Pydraul hydraulic fluids also offer several additional benefits—

REDUCED FIRE INSURANCE RATES

Because Pydraul eliminates fire hazards from hydraulic equipment operations, Pydraul reduces the threat of fire to surrounding structure and equipment. Insurance premiums for plants using Pydraul, therefore, are often lower than premiums for operations using petroleum oil.

LONGER PUMP LIFE

Machines that operate on water-based fluids frequently require pump repair or replacement as often as every two or three months. Machines that use Pydraul hydraulic fluids can operate on the same pump for several years. Pydraul hydraulic fluids give the same long pump life as the finest grade petroleum oil.

0237490

TOWOLDMON0027695
WATER_PCB-00012164

NO CORROSION PROBLEMS

Any metal hydraulic system component in contact with Pydraul will not rust. And Pydraul hydraulic fluids do not lose anti-rust properties with use.

MAXIMUM EQUIPMENT RESPONSE


Pydraul never produces excessive froth or foam during normal operations to interfere with hydraulic equipment response. Because Pydraul hydraulic fluids lubricate as well as premium petroleum oils, Pydraul permits equipment to operate at optimum response capability.

INSPECTION AND REPLACEMENT DOWN-TIME ARE VIRTUALLY ELIMINATED

Pydraul hydraulic fluids are designed to be permanent. Pydraul fluids do not wear out. Except for normal "make-up" requirements, you never have to add new Pydraul to hydraulic systems. Pydraul eliminates "drain and change" periods; it does not have to be inspected in your system from month to month—or even replaced from year to year.

0237491

TOWOLDMON0027696
WATER_PCB-00012165

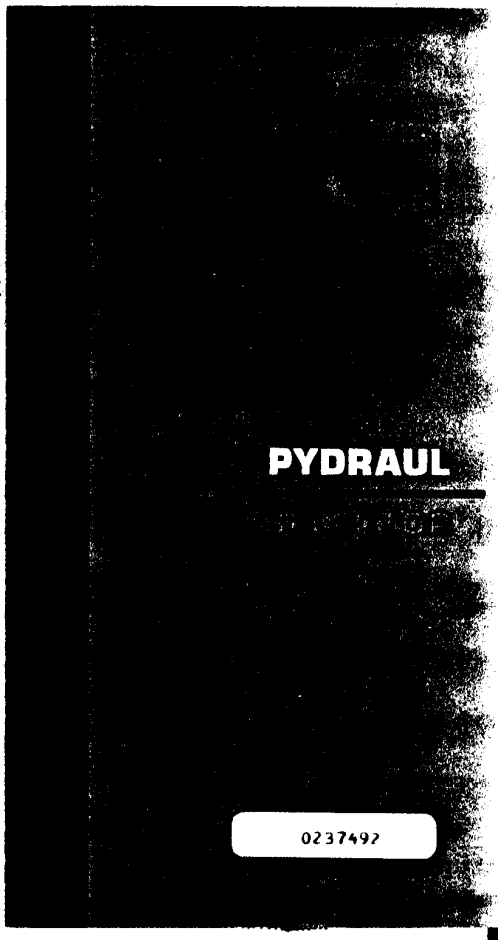

TOWOLDMON0027697
WATER_PCB-00012166

PYDRAUL 60

Low viscosity Pydraul 60 flows freely at −20° F. It retains its properties and thermal stability at temperatures up to 200° F. In hydraulic operations that require precision flow *instantly*, Pydraul 60 supplies smooth operation from machine start to stop; it offers flow-on-demand operation without hydraulic lag. Pydraul 60 offers excellent, fire-resistant, hydraulic operation with vane, gear and piston pumps in high-speed machine tools.

FIRE-RESISTANCE TESTS


Pydraul fluids protect hydraulic equipment and personnel with *permanent* fire protection. Pydraul fluids contain no water to evaporate and leave a flammable residue. During their more than one billion machine hours of use, Pydraul fluids have been accidentally sprayed over molten metal, through electrical arcs, into flames and sparks—without causing fire. Pydraul fluids have never caused or contributed to an hydraulic fire in any type of equipment. They pass all of the important ignition tests for fire-resistance, as shown by these test results:

Physical Properties	
Appearance	
Spec. Gravity 25°/25°C	
Neutralization No. (acidity) (mg KOH/gm) max.	
Moisture (max.)	
Viscosity As measured: 100° F. 210° F. "Absolute Saybolts" 100° F. (SSU X Density) 210° F.	
Pour Point	
Compressibility X10⁻⁶ sq. in./lb.	
Bulk Temperature Max.	
Boiling Point °F at 760mm Hg.	
Coefficient of Thermal Expansion per ° F.	
Specific Heat (BTU/lb./° F.) (@ 77° F.)	
Thermal Conductivity BTU/hr./ft./° F.	
Vapor Pressure Hg @ 200° F.	
Bulk Modulus (Room Temp. 1000-6000 psi)	
Solubility in Water	
Test	
High Pressure Spray Test AMS-H1508 and MIL-F-7100. Test fluid sprayed at 100 psi through orifice, passing through flame of oxyacetylene torch, 6000° F.	
Low Pressure Spray Test (AMS-H1508). Test fluid sprayed at low pressure over ignited, oil-soaked rag to determine degree of increase in flame intensity.	
Hot Manifold Test (MIL-F-7100). Test fluid dripped on tube at 1300° F.	
Molten Metal Ignition Test. Test fluid exposed to the surface of aluminum alloy at 1200° F., to test for spontaneous ignition.	

0237493

TOWOLDMON0027698
WATER_PCB-00012167

TOWOLDMON0027699
WATER_PCB-00012168

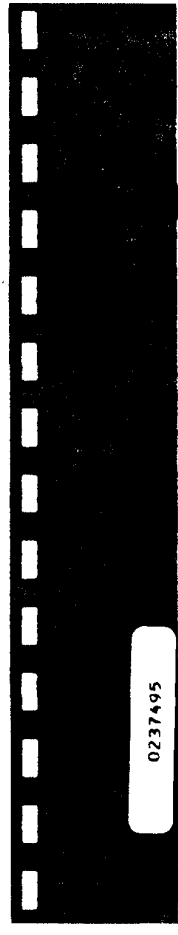

Physical Properties	
Appearance	
Spec. Gravity 25°/25°C	
Neutralization No. (acidity) (mg KOH/gm) max.	
Moisture (max.)	
Viscosity As measured: 100° F 210° F	
"Absolute Saybolts" 100° F. (SSU X Density) 210° F.	
Pour Point	
Compressibility X10⁻⁶ sq. in./lb.	
Bulk Temperature Max.	
Boiling Point °F at 760mm Hg.	
Coefficient of Thermal Expansion per ° F	
Specific Heat (BTU/lb./° F.) (@ 77° F.)	
Thermal Conductivity BTU/hr./ft./° F.	
Vapor Pressure Hg @ 200° F.	
Bulk Modulus (Room Temp.) 1000-6000 psi	
Solubility in Water	
Test	
High Pressure Spray Test AMS-3150B and MIL-F-7100. Test fluid sprayed at 100 psi through orifice, passing through flame of oxyacetylene torch, 6000° F.	
Low Pressure Spray Test (AMS-3150B). Test fluid sprayed at low pressure over ignited, oil-soaked rag to determine degree of increase in flame intensity.	
Hot Manifold Test (MIL-F-7100). Test fluid dripped on tube at 1300° F.	
Molten Metal Ignition Test. Test fluid exposed to the surface of aluminum alloy at 1200° F., to test for spontaneous ignition.	

TOWOLDMON0027700
WATER_PCB-00012169

A-200

PYDRAU
A-20

Pydraul A-200 is one of the most widely used, general-purpose, fire-resistant hydraulic fluids in industry. Introduced in 1959, it was the first fire-resistant, straight synthetic hydraulic fluid to break the "price/performance barrier." Where protection from fire is the maximum consideration, Pydraul A-200 offers the lowest cost per gallon of straight synthetic, fire-resistant hydraulic fluids.

0237496

TOWOLDMON0027701
WATER_PCB-00012170

Physical Properties
Appearance
Spec. Gravity 25°/25°C
Neutralization No. (acidity) (mg KOH/gm) max.
Moisture (max.)
Viscosity As measured: 100° F. 210° F. "Absolute Saybolts" 100° F. (SSU X Density) 210° F.
Pour Point
Compressibility $X10^{-6}$ sq. in./lb.
Bulk Temperature Max.
Boiling Point °F at 760mm Hg.
Coefficient of Thermal Expansion per ° F.
Specific Heat (BTU/lb./° F.) (@ 77° F.)
Thermal Conductivity BTU/hr./ft./° F.
Vapor Pressure Hg @ 200° F.
Bulk Modulus (Room Temp.) (1900-6000 psi)
Solubility in Water
Test
High Pressure Spray Test AMS-3150B and MIL-F-7190. Test fluid sprayed at 100 psi through orifice, passing through flame of oxyacetylene torch, 6000° F.
Low Pressure Spray Test (AMS-3150B). Test fluid sprayed at low pressure over ignited, oil-soaked rag to determine degree of increase in flame intensity.
Hot Manifold Test (MIL-F-7100). Test fluid dripped on tube at 1300° F.
Molten Metal Ignition Test. Test fluid exposed to the surface of aluminum alloy at 1200° F., to test for spontaneous ignition.

0237497

TOWOLDMON0027702
WATER_PCB-00012171

TOWOLDMON0027703
WATER_PCB-00012172



0237499

Physical Properties
Appearance
Spec. Gravity 25°/25°C
Neutralization No. (acidity) (mg KOH/gm) max.
Moisture (max.)
Viscosity As measured: 100° F 210° F. "Absolute Saybolts" 100° F. (SSU X Density) 210° F.
Pour Point
Compressibility X10⁶ sq. in./lb.
Bulk Temperature Max.
Boiling Point °F at 760mm Hg.
Coefficient of Thermal Expansion per ° F.
Specific Heat (BTU/lb./° F.) (@ 77° F.)
Thermal Conductivity BTU/hr./ft./° F.
Vapor Pressure Hg @ 200° F.
Bulk Modulus (Room Temp. 1000-6000 psi)
Solubility in Water
Test
High Pressure Spray Test AMS-3150B and MIL-F-7100. Test fluid sprayed at 100 psi through orifice, passing through flame of oxyacetylene torch, 6000° F.
Low Pressure Spray Test (AMS-3150B). Test fluid sprayed at low pressure over ignited, oil-soaked rag to determine degree of increase in flame intensity.
Hot Manifold Test (MIL-F-7100). Test fluid dripped on tube at 1300° F.
Molten Metal Ignition Test. Test fluid exposed to the surface of aluminum alloy at 1200° F., to test for spontaneous ignition.

TOWOLDMON0027704
WATER_PCB-00012173

625

PYDRAUL 625

High viscosity Pydraul 625 is tailored for ultra-heavy-duty hydraulic operations, such as for large industrial presses and pumps. Pydraul 625 is also used as a fire-and-explosion-resistant air compressor lubricant. Pydraul 625 can be used in any equipment requiring an 800 to 1000 SUS oil.

0237500

TOWOLDMON0027705
WATER_PCB-00012174

Physical Properties
Appearance
Spec. Gravity 25°/25°C
Neutralization No. (acidity) (mg KOH/gm) max.
Moisture (max.)
Viscosity As measured : 100° F. 210° F. "Absolute Saybolts" 100° F. (SSU X Density) 210° F.
Pour Point
Compressibility X10⁴ sq. in./lb.
Bulk Temperature Max.
Boiling Point °F at 750mm Hg.
Coefficient of Thermal Expansion per ° F.
Specific Heat (BTU/lb./° F.) (@ 77° F.)
Thermal Conductivity BTU/hr./ft./° F.
Vapor Pressure Hg @ 200° F.
Bulk Modulus (Room Temp., 1000-6000 psi)
Solubility in Water
Test
High Pressure Spray Test AMS-3150B and MIL-F-7100. Test fluid sprayed at 100 psi through orifice, passing through flame of oxyacetylene torch, 5000° F.
Low Pressure Spray Test (AMS-3150B). Test fluid sprayed at low pressure over ignited, oil-soaked rag to determine degree of increase in flame intensity.
Hot Manifold Test (MIL-F-7100). Test fluid dripped on tube at 1300° F.
0237501
Molten Metal Ignition Test. Test fluid exposed to the surface of aluminum alloy at 1200° F., to test for spontaneous ignition.

TOWOLDMON0027706
WATER_PCB-00012175

0237502

	PYDRAUL AC	PYDRAUL 825	PYDRAUL F-9	PYDRAUL A-200	PYDRAUL 150	PYDRAUL 40
Physical Properties						
Appearance	Clear Blue Liquid	Cloudy Blue Liquid	Cloudy Blue Liquid	Cloudy Blue Liquid	Cloudy Blue Liquid	Cloudy Blue Liquid
Spec. Gravity 25°/25°C	1.340-1.360	1.340-1.370	1.270-1.300	1.415-1.430	1.119-1.135	1.008-1.091
Neutralization No. (acidity) (mg KOH/gm) max.	0.15	0.30	0.30	0.80-1.10	0.17	0.25
Moisture (max.)	0.15%	0.15%	0.20%	0.05%	0.15%	0.10%
Viscosity As measured: 100° F.	408.8 SSU	625.7 SSU	225 SSU	144 SSU	145.9 SSU	60 SSU
210° F.	42.1 SSU	45.9 SSU	43.3 SSU	35.7 SSU	52.5 SSU	35 SSU
"Absolute Saybolts" 100° F.	550 SSU	845 SSU	327 SSU	204 SSU	163 SSU	60.5 SSU
(SSU X Density) 210° F.	50 SSU	59 SSU	52 SSU	48 SSU	56 SSU	35 SSU
Pour Point	+20° F.	+20° F.	−5° F.	+15° F.	−55° F.	−70° F.
Compressibility X10⁻⁶ sq. in./lb.	2.66	2.66	2.58	2.28	3.13	3.05
Bulk Temperature Max.	300° F.	300° F.	300° F.	300° F.	200° F.	200° F.
Boiling Point °F. at 760mm Hg.	688° F.	724° F.	644° F.	620° F.	617° F.	707° F.
Coefficient of Thermal Expansion per ° F.	0.00040	0.00040	0.00041	0.00040	0.00042	0.00044
Specific Heat (BTU/lb./° F.) (@ 77° F.)	0.32	0.28	0.32	0.28	0.40	0.42
Thermal Conductivity BTU/hr./ft./° F.	0.066	0.065	0.067	0.068	0.072	0.047
Vapor Pressure Hg @ 200° F.	0.02mm	0.09mm	0.1mm	0.2mm	0.1mm	0.01mm
Bulk Modulus (Room Temp., 1000-6000 psi)	375,000	375,000	387,000	438,000	319,000	328,000
Solubility in Water	Negligible	Negligible	Negligible	Negligible	Negligible	Negligible
Test	**PYDRAUL AC**	**PYDRAUL 825**	**PYDRAUL F-9**	**PYDRAUL A-200**	**PYDRAUL 150**	**PYDRAUL 40**
High Pressure Spray Test AMS-3150B and MIL-F-7100. Test fluid sprayed at 100 psi through orifice, passing through flame of oxyacetylene torch, 6000° F.	Does not flash or ignite up to 3½ feet from orifice.	Does not flash or ignite up to 3½ feet from orifice.	Does not flash or ignite up to 3½ feet from orifice.	Does not flash or ignite up to 3½ feet from orifice.	Self-extinguishing.	Self-extinguishing.
Low Pressure Spray Test (AMS-3150A). Test fluid sprayed at low pressure over ignited, oil-soaked rag to determine degree of increase in flame intensity.	Very slight increase in flame intensity.	Very slight increase in flame intensity.	No increase in flame intensity.	Slight increase in flame intensity.	Slight increase in flame intensity.	Slight increase in flame intensity.
Hot Manifold Test (MIL-F-7100). Test fluid dripped on tube at 1300° F.	Does not flash or burn.	Does not flash or burn.	Does not flash or burn.	Does not flash or burn.	Intermittent flashing and burning. Little burning in pan below.	Intermittent flashing and burning. Does not burn after leaving tube.
Molten Metal Ignition Test. Test fluid exposed to the surface of aluminum alloy at 1200° F., to test for spontaneous ignition.	Does not ignite.	Does not ignite.	Does not ignite; flashes by spark.	Does not ignite.	Does not ignite.	Does not ignite.


0237503

TOWOLDMON0027708
WATER_PCB-00012177

PYDRAUL VISCOSITIES

Laboratory viscosity measurements of SSU (Saybolt Seconds Universal) are affected by fluid density. Because all petroleum oils used for hydraulic operations have similar densities, their measured viscosities can be compared; however, the densities of synthetic fluids differ from one another and from petroleum oils. To compare viscosities, measured viscosities of synthetic fluids must be corrected for density.

On the chart below, each curve for a Pydraul fluid shows the viscosity-temperature relationship modified for the difference in density of the indicated Pydraul fluid. By comparing these curves with viscosity curves of light, medium, and heavy grades of petroleum oils, it can be seen that Pydraul fluids virtually duplicate viscosities of petroleum oils at normal operating temperatures.

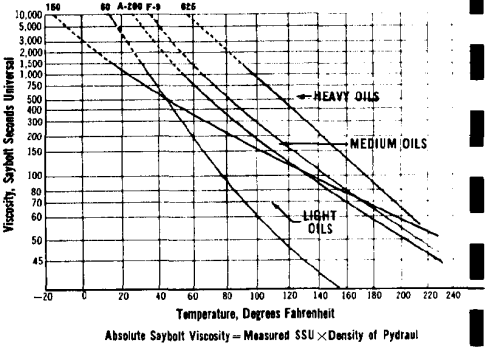

Absolute Saybolt Viscosity = Measured SSU × Density of Pydraul

0237504

TOWOLDMON0027709
WATER_PCB-00012178

CONVERTING TO PYDRAUL IS EASY

How to convert existing equipment.

No matter what type of hydraulic fluid you now use in your equipment, you can easily convert to Pydraul. Virtually every type of hydraulic machinery requiring a fire-resistant hydraulic fluid has been converted to Pydraul. Equipment manufacturers are experienced in converting machinery to Pydraul and should be consulted for their specific recommendations. Some manufacturers will tell you exactly what seals to change. Most can supply the correct seals.

Machines operating on a *straight synthetic*, fire-resistant fluid can be converted to Pydraul without interrupting your production. When converting to Pydraul A-200, Pydraul 625, or Pydraul AC, simply add Pydraul as make-up. To convert to other Pydraul fluids, drain the old fluid and refill with the Pydraul fluid. No flush is necessary.

Machines operating on oil or water-based hydraulic fluids require the few simple steps outlined below. These steps are necessary to clean the system of the old fluid and to change to dynamic seals compatible with Pydraul.

Check for leaks.

Check the entire system before the equipment is shut down for conversion. Mark these leaks for later correction.

Drain fluid from the system.

Drain the reservoir, lines, and cylinders as completely as possible to remove all of the old fluid. This can sometimes be done by opening unions at low spots in the system and blowing with clean air.

0237505

VISCOSITIES
CONVERTING

TOWOLDMON0027710
WATER_PCB-00012179

Clean reservoir and filters.
Remove interior paint from the reservoir (if painted) by scraping or with a commercial paint remover. Wipe clean with lint-free rags. Clean or change the cartridge in the filter.

Check pumps for wear. Replace any part of the pump assembly that shows serious wear.

Install seals and packings compatible with Pydraul.
Dynamic seals should be changed. Reinforced-type hoses are normally satisfactory with Pydraul and need not be replaced if they are in good condition. In operations where severe hose flexing and bending take place, butyl-lined hoses are recommended. Accumulator diaphragms should be made of butyl, Viton, or other materials resistant to Pydraul.

Reconnect lines.
When reconnecting lines, tighten carefully—particularly those joints that leaked previously. Then fill with Pydraul to the proper level.

Start and stop pump.
With the hydraulic controls in neutral, start and stop the pump several times, but do not allow the system to reach working pressure. This will help assure that fluid reaches the pump and lubricates it. The pump can then be left on, and the system can be brought to working pressure.

Run through the cycle.
Run through the cycle several times to use all parts of the hydraulic system. Bleed any trapped air through the petcocks or valves. Check the fluid level and add Pydraul if necessary.

How to equip new machinery with Pydraul.
When ordering new hydraulic equipment, simply specify, "For use with Pydraul hydraulic fluid."

0237506

TOWOLDMON0027711
WATER_PCB-00012180

HANDLING AND STORAGE

As with all specialized industrial fluids, certain precautions are advisable when handling Pydraul fluids. No problems will arise when Pydraul fluids are used as recommended.

Avoid repeated or continuous skin contact. Repeated or prolonged contact can lead to drying and skin "chapping." Where prolonged skin contact cannot be avoided, gloves should be worn.

At room temperatures, there is no vapor inhalation hazard from Pydraul; however, inhalation of vapors at high temperatures should be prevented. In extensive animal experimentation, exposures to vapors for one hour showed local respiratory irritation, although no systemic effects were produced.

Although eye irritation studies using Pydraul at full strength indicate Pydraul is a mild irritant, there is no evidence to show Pydraul causes permanent damage to eye tissues. If Pydraul fluid is splashed or sprayed into the eyes, eyes should be thoroughly flushed with water and the workman referred to a physician. To relieve irritation, physicians have used 1% pontocaine solution, as well as the ophthalmic cortisone acetate solution.

Pydraul hydraulic fluids can be stored at subzero temperatures without fluid damage. Before using, simply allow the fluid to warm to room temperature. Drums stored outside should be sealed tightly and placed in a horizontal position to keep out moisture.

0237507

HAN

TOWOLDMON0027712
WATER_PCB-00012181

St. Louis, Mo. 63166

Monsanto



TOWOLDMON0027713
WATER_PCB-00012182