GAUGE, METER and TACHOMETER ACCESSORIES and FITTINGS

LIGHT SOURCE KITS

6 OR 12 VOLTS



3-5786

Use to mount 3-5787 Ammeter and 3-5784 Oil Pressure. Contains 1 bracket, 1 bulb 6 volt, 1 bulb 12 volt, 1 socket, 2 bolts, 2 nuts.

12 VOLTS

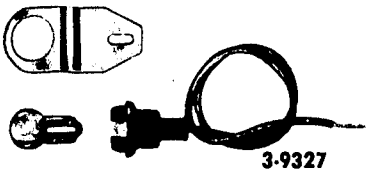

3-9327

For use with instruments having window for lighting. Contains a 12" single lead wire with light socket and 12 volt bulb, and bracket which attaches to stud on bracket instrument.

3-5694 12 VOLTS

For use in illuminating gauges installed in miniature housing, No. 3-5691. Contains bulb bracket and socket assembly.

INSTALLATION KIT

For 3-5835 and 3-5838



3-5839

Kit contains all wire, nylon tubing and fittings (except Tee fitting) for installation of 3-5835 or 3-5838.

(See below for Tee fittings)

TEMPERATURE SENDERS

12 VOLTS



For use with electric gauges—3-9344, 3-5770 (one gauge only.)

PIPE THREAD	PART NO.
⅛ in.	3-9316
¼ in.	3-5764
⅜ in.	3-5765
½ in.	3-5766

FUEL LEVEL SENDERS

12 VOLTS

For Use with 3-9304 Fuel Gauge

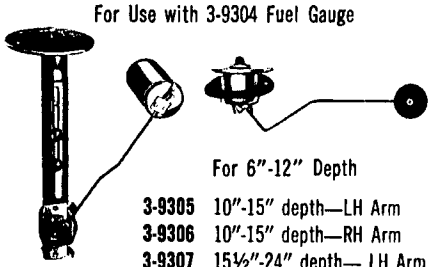

For 10"-24" Depth

For 6"-12" Depth

3-9305	10"-15" depth—LH Arm
3-9306	10"-15" depth—RH Arm
3-9307	15½"-24" depth— LH Arm
3-9308	15½"-24" depth—RH Arm
3-9309	6"-12" depth—LH Arm
3-9310	6"-12" depth—RH Arm

PRESSURE SENDER

12 VOLTS



3-9315

⅛ in. P.T. use below listed adapters for other thread sizes.

FUEL LEVEL SENDER INSTALLATION KIT

3-9337

Contains necessary flange, gasket, screws & washers for new installations.

Gasket only **3-9338**

LOW PRESSURE SWITCHES



Switches are used to actuate Hour Meters. This type is a single circuit with two terminals, insulated. Contact setting, range from 1-30 P.S.I., and all are sealed at the factory. Switches should be applied where they will be subjected to low pulsation rates of actuating liquid, gas, or air. The housing is made of a coated plastic. Chart below shows all dimensions. 300 P.S.I. operating max.

3-9332	1-7 P.S.I. factory set 4 P.S.I. normally open
3-9333	1-7 P.S.I. factory set 4 P.S.I. normally closed
3-9334	7-30 P.S.I. factory set 15 P.S.I. normally open
3-9335	7-30 P.S.I. factory set 15 P.S.I. normally closed

TEE FITTINGS FOR 3-5839

Use when both Oil Pressure Gauge and Indicating Light are used.

3-5842

⅛" Pipe thread T fitting for Chevrolet (Ex. 58-63 w/348 Eng.), Chrysler, Dodge, Ford, Mercury, DeSoto, Edsel, Lincoln, Plymouth.

3-5843

¼" pipe thread T fitting for Chevrolet 58-63 w/348 Eng., Cadillac.

COMPRESSION CONNECTOR

3-5844

Oil Pressure Gauge to tubing Connector (Female type) ⅛" tube size—⅛" P.T.

ELECTRICAL RESISTORS

3-9339

To adapt 12 volt gauges to 24 volt systems

3-9340

To adapt 12 volt gauges to 32 volt systems

TEMPERATURE GAUGE ADAPTER NUTS

3-9323	¼" P.T. .3860" I.D.
3-9324	⅜" NPTF. .4375" I.D.
3-9325	½" P.T. .4375" I.D.
3-9326	⅝" -18 .4531" I.D.

MOUNTING BRACKET

3-5867



Use with 3-5832 Ammeter

ADAPTER

3-5865



Use with 3-5832 Ammeter

ADAPTER RING

3-5866



Use with 3-5826 Ammeter

MOUNTING BRACKET

3-5833



For use on steering posts