



LICENSE PLATE BRACKETS-256

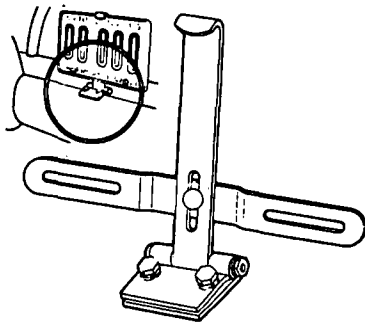

3-4951

Adjustable
Clamps on Front Bumper
of Late Model Cars



3-4937

Volkswagen Bracket
Designed for Front and Rear
Heavy Gauge Steel



3-4933

Quick change holder fabricated of rust resistant, zinc plated spring steel.

ENGINE HOUR METER-266

HOOR METERS

Sealed-Water and Dust Proof
Heavy Bearings—Shockproof Odometer
High Voltage Insulation

3-9330
3-9331

Stirrup Mount
Screw Mount

These fine hour meters are for all direct current applications within a range of 4-40 D.C. Fits all nominal electrical systems 6-12-24-36 volts. Has 2" metal dial in black plastic case. 3-9330 has chrome bezel and 3-9331 has a black one. Dials have white lettering; black numerals show total accumulated hours, while red numerals show tenths of hours. Has a total read out of 9999.9 then repeat automatically.

These meters can be used on portable air compressors, earth moving machine construction, farm tractors, truck fleets, cranes, dredges, shovels, power pumps, generator sets, boats, aircraft, trains, lift trucks. Contains necessary mounting hardware.




3-9331



3-9330

LOW PRESSURE SWITCHES



Switches are used to actuate Hour Meters. This type is a single circuit with two terminals, insulated. Contact setting, range from 1-30 P.S.I., and all are sealed at the factory. Switches should be applied where they will be subjected to low pulsation rates of actuating liquid, gas, or air. The housing is made of a coated plastic. Chart below shows all dimensions. 300 P.S.I. operating max.

3-9332 1-7 P.S.I. factory set 4 P.S.I. normally open

3-9333 1-7 P.S.I. factory set 4 P.S.I. normally closed

3-9334 7-30 P.S.I. factory set 15 P.S.I. normally open

3-9335 7-30 P.S.I. factory set 15 P.S.I. normally closed